

Appendix. 3-1

AMSR-E Level 1 product format description (MAS-100045A)

MAS-100045A

Aqua AMSR-E
Level 1 Product Format
Description Document

Japan Aerospace Exploration Agency (JAXA)

COPYRIGHT JAXA

Contents

1.	Introduction	1
1.1.	Abstract.....	1
2.	Abstract of the Satellite and Sensor	2
2.1.	Overview of Aqua (EOS-PM; Earth Observation Satellite-PM).....	2
2.2.	Overview of AMSR-E.....	4
2.3.	Observation Principal of AMSR-E	5
2.4.	Observation Geometry	5
3.	AMSR-E Level 1 Product	6
3.1.	Definition of a Scene for AMSR-E.....	6
3.2.	AMSR-E Level 1 Product Specification	8
4.	HDF	10
4.1.	Outline of HDF	10
4.2.	HDF File	10
§L1A.	AMSR-E Level 1A Product Format Description	
§L1B.	AMSR-E Level 1B Product Format Description (Not applicable for NSIDC DAP package)	
§L1M.	AMSR-E Level 1BMap Product Format Description (Not applicable for NSIDC DAP package)	

1. Introduction

This document is the level 1 product format description of AMSR-E (Advanced Microwave Scanning Radiometer for EOS) on boarded Aqua (EOS-PM; Earth Observation Satellite-PM).

1.1. Abstract

AMSR-E products are shown in Table 1.1-1. This document explains level 1A, level 1B and level 1B Map products.

Table 1.1-1 Types of AMSR-E products

Product level	Outline of the product
1A	This product includes observed sensor data, the radiometric correction conversion coefficients, and geometrical information of each sampled observation. Observed sensor data is raw counted value, and geometrical information contains geo-location of observed surface on the earth, solar angle, directional vector to Aqua, and so on.
1B	This product includes the brightness temperature converted by the radiometric correction coefficients from observed sensor data of level 1A. It also contains the ancillary data stored in level 1A product.
1B Map	This product is a clipped observation data of the level 1B product for some 3000 km around and map projected, and includes ancillary information. There exist three kinds of projection methods such as Equirectangular, Mercator and Polar stereo.
2	This product includes physical parameters related the hydrology (accumulated water vapor, accumulated cloud liquid water, amount of precipitation, sea surface wind speed, sea surface temperature, sea ice concentration, snow water equivalence, and soil moisture) produced from L1B products, and ancillary information.
2 Map	This product is clipped from level 2 product for some 3000 km around and map projected, and includes ancillary information.
3	There are two kinds of these products such as daily or monthly averaged observation data. It includes ancillary information and map projected onto global grids.

Remarks: The shaded products in the above list are specified in other documents for each.

2. Abstract of the Satellite and Sensor

2.1. Overview of Aqua (EOS-PM; Earth Observation Satellite-PM)

The earth observing satellite Aqua of NASA was launched from the Vandenberg Firing Range in California by a DELTA II launch vehicle in May 2002. Aqua observes various kinds of physical phenomena related to water and energy circulation from space. Aqua data will promote the research activities for interactions between the atmosphere, oceans and lands, and their effects on climate changes.

There are a lot of derived data from Aqua data such as atmospheric temperature, humidity, clouds and precipitation, earth radiation, snow and sea ice, sea-surface temperature, oceanic primary production, and soil water. These collected datasets are expected to promote the further development of research on global environmental change, as well as improving numerical weather forecasts.

Aqua satellite is shown in Figure 2.1-1. Its main characteristics and sensors are listed in Table 2.1-1 and Table 2.1-2.



Figure 2.1-1 Aqua Satellite

Table 2.1-1 Main characteristics of Aqua

Launch Date		May 4th, 2002
Weight		About 3,000 kg (at launch)
Power		4,444 W (Average)
Life		6 years (Target)
Orbit	Category	Sun-synchronous sub-recurrent orbit
	Altitude	705 km
	Inclination	98 ± 0.1degrees
	Period	98.9 minutes
	Revisit Period	16 days
	Local Sun Time	PM13: 30 ± 15 minutes

Table 2.1-2 Instruments of Aqua

Instrument		Development organization(Country)
AMSR-E	Advanced Microwave Scanning Radiometer for EOS	JAXA (Japan)
AMSU	Advanced Microwave Sounding Unit	NASA (US)
AIRS	Atmospheric Infrared Sounder	NASA (US)
CERES	Clouds and the Earth's Radiant Energy System	NASA (US)
HSB	Humidity Sounder for Brazil	INPE (Brazil)
MODIS	Moderate Resolution Imaging Spectroradiometer	NASA (US)

- * JAXA: Japan Aerospace Exploration Agency
- * NASA: National Aeronautics and Space Administration
- * INPE: Institute National de Pesquisas Espaciais

2.2. Overview of AMSR-E

AMSR-E (Advanced Microwave Scanning Radiometer for EOS) has the largest-diameter microwave scanning radiometer (about 1.6 meters), and it can observe water relevant data with high resolution. Moreover, AMSR-E observes microwaves instead of optical data, and it can observe from day to night, under any weather condition and less cloud effects. AMSR-E will demonstrate advantages and viabilities of microwave-based observation of land and sea under clouds.

AMSR-E measures the radiation from the earth surface or atmosphere. The data obtained by AMSR-E is converted to brightness temperature by the temperature of CSM (Cold Sky Mirror) and HTS (High Temperature noise Source, the radiometric wave absorber). It will provide geophysical information relevant to water such as the integrated water vapor, integrated cloud liquid water, precipitation, sea surface wind speed, sea surface temperature, sea ice concentration, snow water equivalent, and soil moisture and so on.

Main characteristics of AMSR-E are shown Table 2.2-1.

Table 2.2-1 Main Characteristics of AMSR-E

Frequency (GHz)	6.9	10.65	18.7	23.8	36.5	89
Resolution	About 50 km		About 25 km		15 km	5 km
Band Width (MHz)	350	100	200	400	1000	3000
Polarization	Horizontal and Vertical					
Incident Angle	About 55 degrees					
Cross Polarization Characteristics	Under -20 db					
Swath Width	About 1450 km					
Dynamic Range	2.7-340 K					
Absolute Accuracy	1 K (1-sigma)					
Temperature Resolution	0.3-1 K (1-sigma)					
Quantization bits	12 bits	10 bits				

2.3. Observation Principal of AMSR-E

An object emits the electromagnetic wave of various wavelengths from its surface in microwave region (1-100 GHz). The electromagnetic intensity differs by its physical features, observing frequencies, and so on. Using these characteristics, AMSR-E observes the faint microwave emitted from the earth surface or the atmosphere.

AMSR-E main reflector rotates to scan and collect radiation of the microwave from the earth surface or the atmosphere. After the microwave was concentrated with its main reflector, it was distributed to the six receivers. The microwave signals detected by each receiver are amplified and integrated, then converted to the digital count value by an A/D converter. These values are the observation raw data of a level 1 product. Furthermore each receiver observes the microwaves of background radiation from the deep space and radiation from the absorber which temperature is controlled for the specific temperature. These data are applied to correct the observation data.

2.4. Observation Geometry

AMSR-E is a conical scan sensor and sweeps the surface of the Earth at about $\pm 75^\circ$ centered at the direction of the satellite flight. The swath width is about 1450 km. The scanning period is 1.5 sec and the data-sampling interval is every 2.6msec for 6GHz - 36GHz, 1.3msec for 89GHz and triggered by the antenna rotation. As a result, the AMSR-E samples 486 data points for a scan of 89GHz and 243 points for other channels. (Fig. 2.4-1)

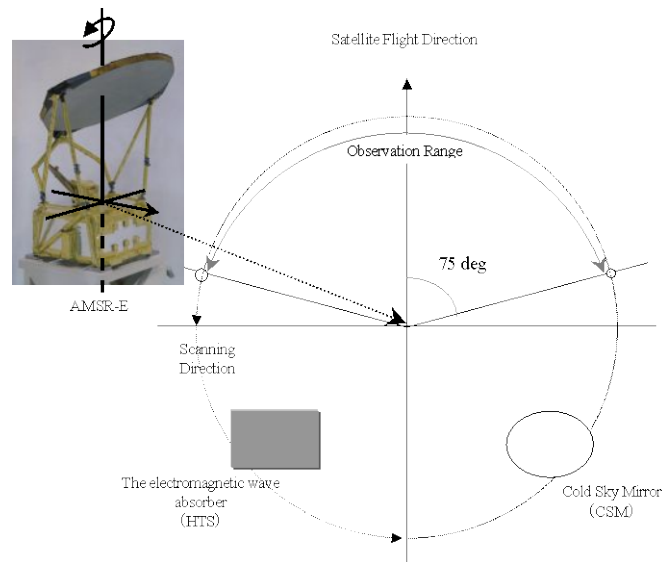


Figure 2.4-1 Observation Geometry of AMSR-E

3. AMSR-E Level 1 Product

3.1. Definition of a Scene for AMSR-E

A scene of AMSR-E is defined as a half orbit between the South and North Poles for its observed position on the earth (Table 3.1-1). An observed position of AMSR-E is not nadir but little forward to the satellite flight direction. Therefore, a scan location shifts about 2.5 minutes earlier from the satellite nadir on the orbit (Figure. 3.1-1) but its center is positioned to the satellite nadir. (Table 3.1-2, Figure 3.1-2).

The number of scans of a scene is calculated with the orbital revisit period, the total number of paths, and the scanning interval. In case of AMSR-E, the number of scans is 1979 scans in a half orbit 49.4 minutes.

$$1978.7 = 86400[\text{sec/day}] * 16[\text{day/rec}] / 233[\text{orbits/rec}] / 1.5[\text{sec/scan}] / 2[\text{scene/orbit}] + 1[\text{the other pole}]$$

This number will be changed under the influence of the attitude fluctuation.

Table 3.1-1 Definition of a Scene for AMSR-E

Orbit Direction	Definition
Ascending Scene	The scan including the two-poles point from the southernmost point to the northernmost point of a half orbit
Descending Scene	The scan including the two-poles point from the northernmost point to the southernmost point of a half orbit

Table 3.1-2 Center Position of a Scan

Processing level/Frequency		The number of observation points	Start Position	Center Position
L1A	Except for 89GHz	243	1	122
	89GHz	486	1	244
L1B	Except for 89GHz	196	1 (24th of L1A)	99
	89GHz	392	1 (48th of L1A)	197

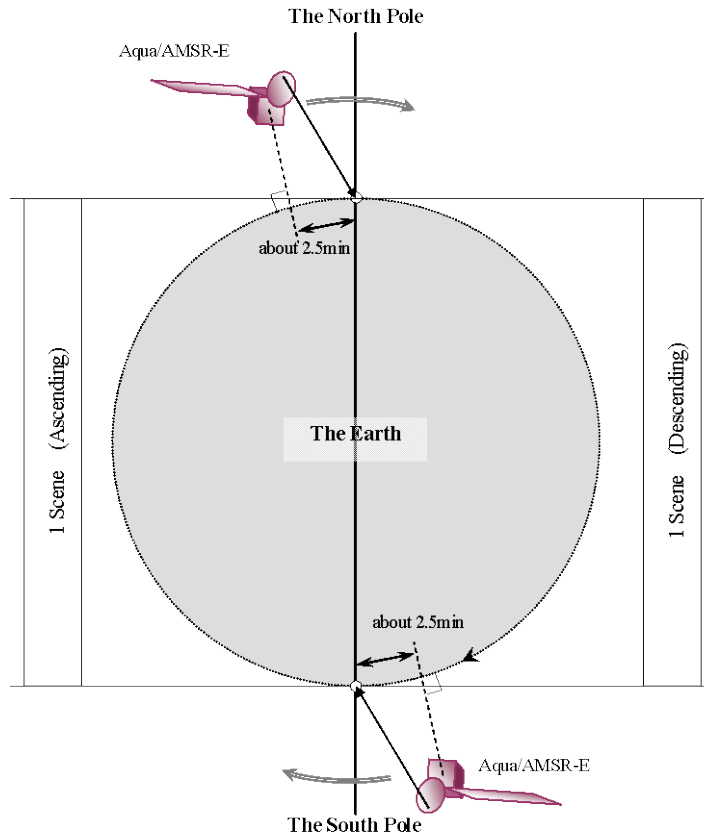


Figure 3.1-1 Geometry of a scene and the flight direction of Aqua

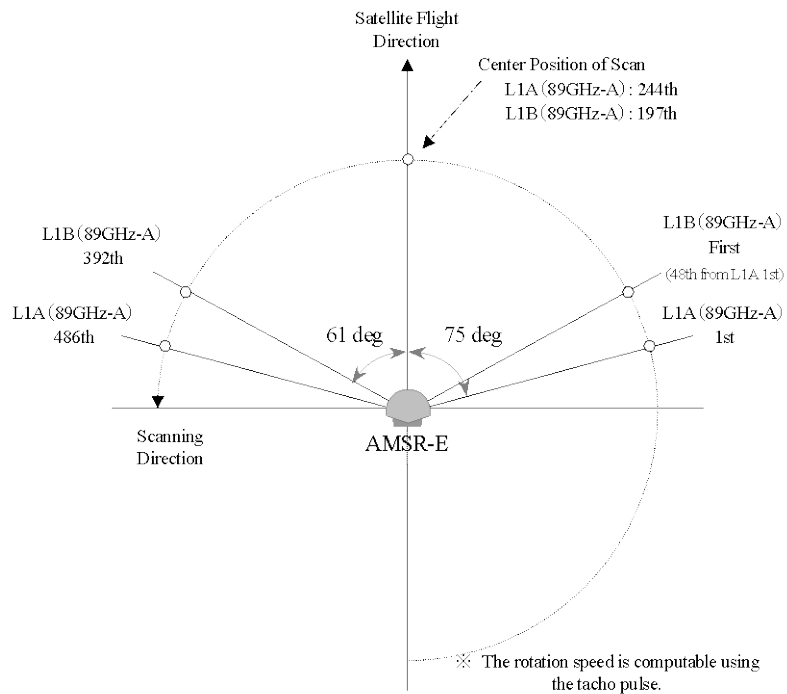


Figure 3.1-2 Geometry of the observation points of a scan

3.2. AMSR-E Level 1 Product Specification

Level 1 product of AMSR-E is one file per one scene. And a scene is extended about 10 scans at both ends for reprocessing. As a result, the number of scans of one product is about 1999 scans. At the other hand, the file of L1B Map is produced on demand. Its projection image is the fixed size and extracted by ordered latitude. The specification of the AMSR-E processing is shown below.

Table 3.2-1 Specification of AMSR-E level 1 products

Level	Production	Processing	The number of scans	Scanning width
1A	Planned	Automatic / Manual Retry	Half Orbit + Overlaps (each 10 scans at both ends)	243: except 89GHz 486: 89GHz
1B	Planned	Automatic / Manual Retry	Half Orbit + Overlaps (each 10 scans at both ends)	196: except 89GHz 392: 89GHz
		Near Real Time	EOC ^{*1} receiving range only	
1BMap	On demand	Automatic	300 pixel * 300 pixel	

*1. EOC (JAXA Earth Observation Center)

Table 3.2-2 Level of processing in AMSR-E

Level	Processing Explanation	The state of observation data
1A	<ul style="list-style-type: none"> ▪ After sorting packets of observation data, deletes the duplicated packets. ▪ The missing packets in the raw data (Rate Buffered Data) are filled with dummy data. ▪ 12 bit and 10 bit observation datasets are converted into 16 bit 2 byte data. ▪ Calculates the conversion coefficient from the raw data to the antenna temperature used for next step processing, L1B processing. ▪ Calculates longitude/latitude of observation positions, incident angle, the direction of sun and so on. ▪ Adds the information of the missing packets and another quality information. ▪ Adds the land/ocean flag. ▪ Adds the overlapped 10 scans to the start and end of a scene. 	Raw data
1B	<ul style="list-style-type: none"> ▪ The raw data count values are converted into the brightness temperature through calculating antenna temperature. ▪ The observation data range is changed to the antenna angle from -61 degrees to +61 degrees. 	Brightness temperature image
1B Map	<ul style="list-style-type: none"> ▪ Observed brightness temperature products clipped from L1B. ▪ Mapping types are Mercator for under 60 degrees latitude data, Latitude/Longitude Equatorial for under 60 degrees latitude data and Polar Stereo for polar region over 60 degrees latitude. 	Mapped brightness temperature image

4. HDF

4.1. Outline of HDF

HDF (Hierarchical Data Format) is developed by NCSA (The National Center for Supercomputing Applications; the University of Illinois) and its objects are machine- and medium- independent and physical representations of data and metadata. HDF can store many varieties of data structure. HDF files are equally accessible by routines written either in FORTRAN or in C provided freely by NCSA.

4.2. HDF File

HDF is a file that consists of the item name and value, and stores them hierarchically. The item name of a data set is using a common name between products, and becomes a key for searching the target data. The HDF library prepares six kinds of data models for storing data sets, and provides the interface. The suitable data model is selected based on the classification and composition of data, and the purpose. Regarding AMSR-E level 1 product, the HDF library is version 4.2r4, and the following three data models are adopted.

- Global Attribute

Global Attribute is used for storing attribute information of a character and a numerical value. In AMSR-E level 1 product, this model is used for the core meta-information and product meta-information. This information is stored as text.

- Vdata

The Vdata is used for storing customized data records. A Vdata object is a one-dimensional array of records. Each record in a Vdata object contains a set of elements, which adhere to a specifically defined template. In AMSR-E level 1 product, this model is used for the scanning start time.

- Scientific Data Sets (SDS)

SDS is used for storing the data of n-dimensional array. Data values in a data set are stored with standard data type (8, 16 or 32 bits signed/unsigned integer, or 32, 64 bits floating point number). Moreover, it can have attribute information corresponding to the data value in a SDS. In AMSR-E level 1 product, this model is used for all data except for the scanning start time.

§L1A

AMSR-E Level 1A Product Format Description

Contents

1	EXPLANATION OF THE PRODUCT	1
1.1	PRODUCT STRUCTURE.....	2
1.2	FILE STRUCTURE	2
1.3	DATA SIZE OF ONE LEVEL 1A PRODUCT.....	28
1.4	THE OTHERS	29
1.4.1	<i>File Name Convention</i>	29
1.4.2	<i>Definition of the Product Data Range</i>	29
1.4.3	<i>Coordinate System</i>	29
1.4.4	<i>Scaling Factor</i>	29
2	DATA EXPLANATION	30
2.1	CORE METADATA.....	30
2.2	PRODUCT METADATA	36
2.3	DATA ITEMS.....	42

1 Explanation of the Product

The Level 1A product stores the value of observed microwave radiation from the earth surface and its geometric information as HDF. The features of the product are shown below.

- Range of data

The level 1A product is extracted data in range of a half orbit between the South Pole and North Pole from level 0 data (Science and GBAD data).

- Observation width

The range of the observation is ± 75 degrees centered at the flight direction. (See Figure 1-1.) 243 data points are observed for each frequency below 89GHz and 486 for 89GHz.

- Main items of stored data

- Scan time
- Count value of the antenna temperature for the earth surface observation data
(Without radiometric conversion)
- Radiometric conversion coefficients
- Count value of the temperature for HTS and CSM
- Geometric information (position, observation incidence angle, sun azimuth angle, etc.)
- Quality information
- Others (The information of the satellite, sensor, and product etc.)

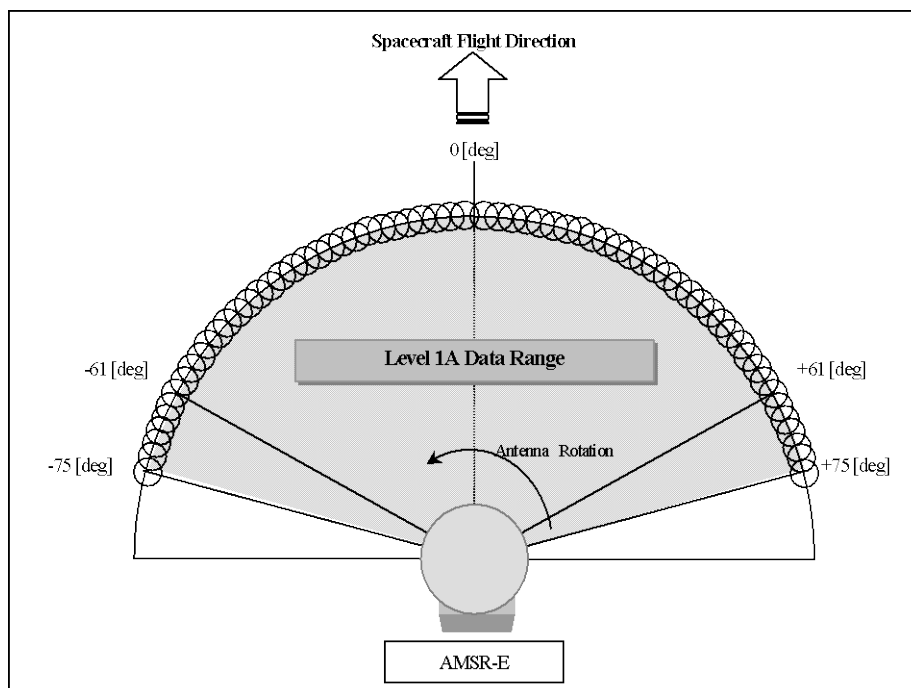


Figure 1-1 The Data Range of One Scan for AMSR-E (Level 1A)

1.1 Product Structure

The logical structure of level 1A product is shown in Table 1-1.

Table 1-1 Logical Structure of AMSR-E Level 1A product

Structure		HDF Data Model	Contents
Header Part	Core Meta	Global Attribute	The general information of the product is stored. It is based on the indispensable item of the attribute of NASA ECS (B. 0).
	Product Meta	Global Attribute	Main characteristics of AMSR-E and the conversion table of the engineering values, etc. are stored.
Data Part		Vdata SDS	<p>The data shown below is stored.</p> <ul style="list-style-type: none"> • Scan Time • Raw values of Observation Data • Calibration Data • Supplementary information (Positions, Orbits, Attitudes, Coefficients, Observation incidence angle, the sun azimuth, etc.) • Quality information


1.2 File Structure

The file structure of AMSR-E level 1A product is shown in Figure 1.2-1. The explanation for the core metadata of the header part is shown in Table 1.2-1, and the product metadata is shown in Table 1.2-2. Moreover, the explanation for each item of the data part shows the data size and the scale factor in Table 1.2-3, and the data structure in Figure 1.2-2 - 1.2-16.

Level 1A Product

Core Metadata Product Metadata

(Header)

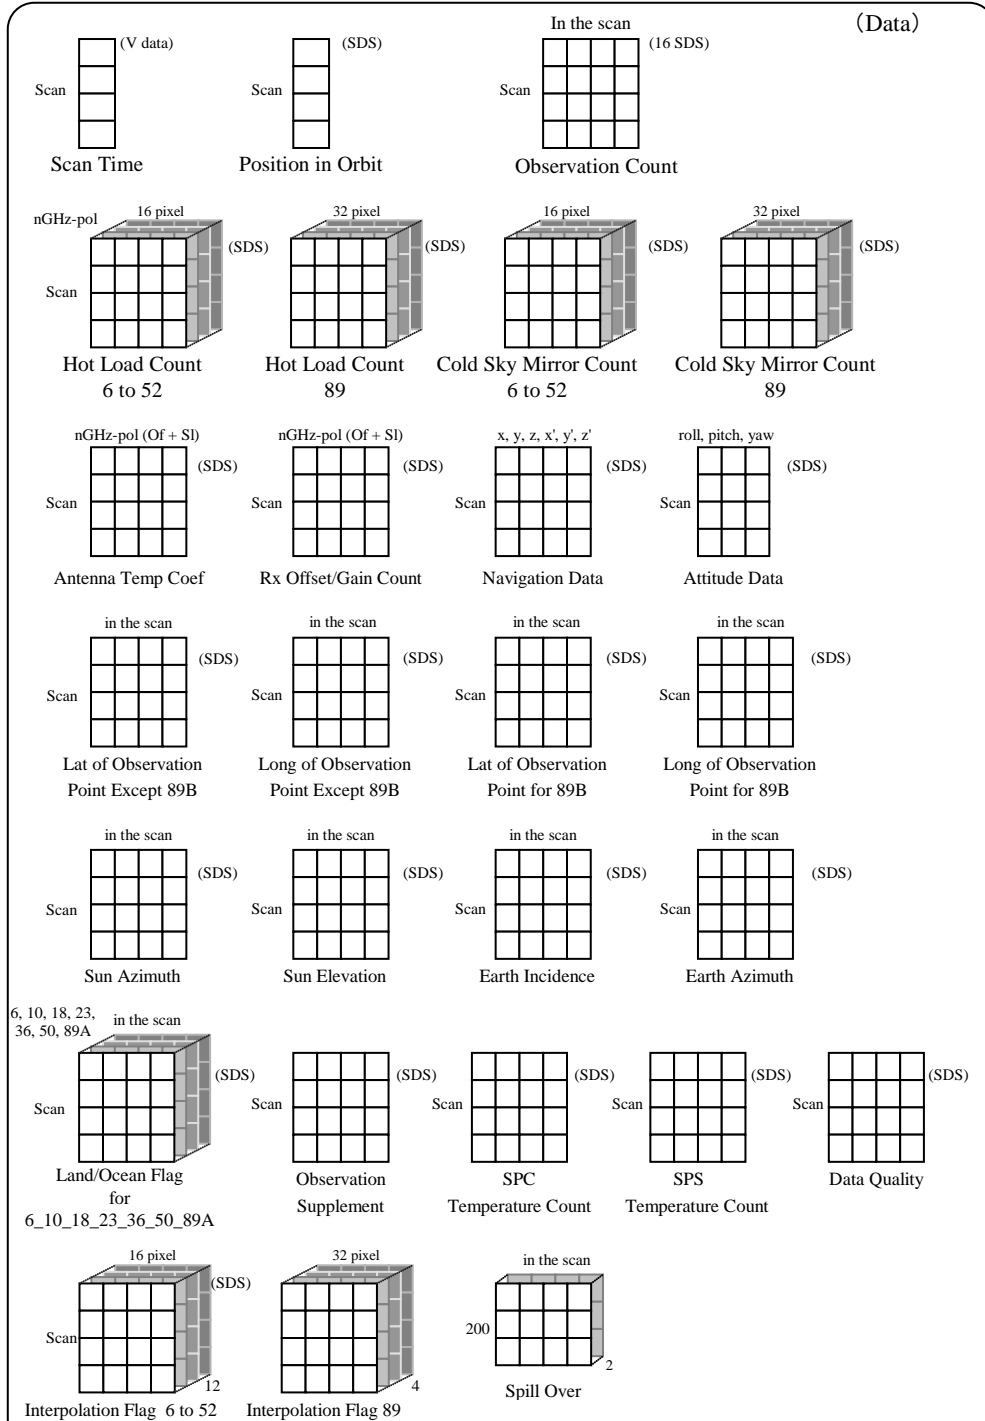

Data Structure

Figure 1.2-1 The Data Structure

Table 1.2-1 Core Meta Items (1/3)

Items (Attribute Name)	Explanation	Concrete Values or Examples	Attention	Fix/ Example
ShortName	The abbreviated name of the product	AMSREL1A		Fix
VersionID	The version ID of the product	RELEASE3		Example
SizeMBECSDataGranule	Data size of the product (Mbytes)	36.6		Example
LocalGranuleID	Product management number	P1AME020729210MD_P01A0000000		Example
ProcessingLevelID	ID of processing level	L1A		Fix
ReprocessingActual	Re-processing date (UTC)	Blank or 2002-08-10	Date only set for Re-processing (0-Fill for blank)	Example
ProductionDateTime	Product creation date (UTC)	2002-07-29T07:14:29.000Z	0-Fill for blank	Example
RangeBeginningTime	Start time of observation data (UTC)	02:57:17.53Z	0-Fill for blank	Example
RangeBeginningDate	Start date of observation data	2002-07-29	0-Fill for blank	Example
RangeEndingTime	End time of observation data (UTC)	03:47:06.81Z	0-Fill for blank	Example
RangeEndingDate	End date of observation data	2002-07-29	0-Fill for blank	Example
GringPointLatitude	Latitude of data effective range	83.71,73.23,34.10,-25.31,-84.97,-73.60,-23.13,36.52		Example
GringPointLongitude	Longitude of data effective range	152.28,91.82,-10.34,-24.72,-39.30,-105.73,-40.70,-27.99		Example
PGENAME	Data processing software name	L1A_Process_Software		Fix
PGEVersion	Data processing software version	333*33****33330333		Example
InputPointer	Input file name	R1540402SGS0221003170100.RBD, R1540402SGS0221005320100.RBD		Example
ProcessingCenter	Data processing center	JAXA EOC		Fix
ContactOrganizationName	Contact organization name	JAXA,1401,Ohashi,Hatoyama-machi,Hiki-gun,Saitama,350-0393,JAPAN,+81-49-298-1307,orderdesk@eoc.jaxa.jp		Fix
StartOrbitNumber	Start orbit number	1251		Example
StopOrbitNumber	End orbit number	1251		Example
EquatorCrossingLongitude	Longitude at the time of equatorial passage	-28.80		Example
EquatorCrossingDate	Date of equatorial passage	2002-07-29	0-Fill for blank	Example
EquatorCrossingTime	Time of equatorial passage	03:24:14.41Z	0-Fill for blank	Example

Table 1.2-1 Core Meta Items (2/3)

Items (Attribute Name)	Explanation	Concrete Values or Examples	Attention	Fix/ Example
OrbitDirection	Orbit direction	DESCENDING		Example
EphemerisGranulePointer	Orbit data file name	R1540957SGS0221003170100.RBD		Example
EphemerisType	Type of orbit data	ELMP		Example
PlatformShortName	Abbreviated name of Platform	EOS-PM1		Fix
SensorShortName	Sensor name	AMSR-E		Fix
NumberOfScans	Number of scans	1994		Example
NumberOfMissingScans	Number of missing packets	1		Example
ECSDataModel	Meta data model name	B.0		Fix
DiscontinuityVirtualChannelCounter	Judgement of virtual channel unit counter discontinuity	DEAD Encounter		Example
QALocationPacketDiscontinuity	Judgment of packet sequence counter discontinuity	discontinuation		Example
NumberOfPackets	Number of packets	31904		Example
NumberOfInputFiles	Number of input files	2		Example
NumberOfMissingPackets	Number of missing packets	1		Example
NumberOfGoodPackets	Number of good packets	31903		Example
ReceivingCondition	Receiving condition	Blank		Fix
EphemerisQA	Ephemeris limit check	OK		Example
AutomaticQAFlag	Limit check by software	PASS		Example
AutomaticQAFlagExplanation	Explanation of limit check by software	1.MissingDataQA:Less than 20 is available->OK, 2.AntennaRotationQA:Less than 20 is available->OK, 3.HotCalibrationSourceQA:Less than 20 is available->OK, 4.AttitudeDataQA:Less than 20 is available->OK, 5.EphemerisDataQA:Less than 20 is available->OK, 6.QualityofGeometricInformationQA:Less than 0 is available->OK, 7.BrightnessTemperatureQA:Less than 20 is available->OK, All items are OK, 'PASS' is employed		Fix

Table 1.2-1 Core Meta Items (3/3)

Items (Attribute Name)	Explanation	Concrete Values or Examples	Attention	Fix/ Example
ScienceQualityFlag	The quality flag when computing the amount of physics	Blank		Fix
ScienceQualityFlagExplanation	Explanation of the quality flag when computing the amount of physics	Blank		Fix
QAPercentMissingData	Percentage of missing data	0		Example
QAPercentOutOfBoundsData	Percentage of out of bound data	0		Example
QAPercentParityErrorData	Percentage of parity error data	0		Example
ProcessingQADescription	Description of the processing error	PROC_COMP		Example
ProcessingQAAttribute	The attribute name which is abnormal by QA metadata	Blank or NumberofMissingPackets	An attribute name is set up only at the time of unusual generating.	Example

Table 1.2-2 Product Meta Items (1/4)

Items (Attribute Name)	Explanation	Concrete Values or Examples	Fix/ Example
SatelliteOrbit	The kind of Satellite's orbit	Sun-synchronous_sub-recurrent	Fix
Altitude	The altitude of Satellite	707.9km	Fix
OrbitSemiMajorAxis	The orbit semi-major axis	7085.858km	Fix
OrbitEccentricity	The orbit eccentricity	0.00095	Fix
OrbitArgumentPerigee	The orbit argument perigee	106.480deg	Fix
OrbitInclination	The orbit inclination	98.15deg	Fix
OrbitPeriod	The orbit period	98minutes	Fix
RevisitTime	Orbit recurrent days	16days	Fix
AMSRChannel	The kind of AMSR channels	6.925GHz,10.65GHz,18.7GHz,23.8GHz,36.5GHz,89.0GHz-A,89.0GHz-B	Fix
AMSRBandWidth	Band width of AMSR	6G-350MHz,10G-100MHz,18G-200MHz,23G-400MHz,36G-1000MHz,50.3G-0,52G-0,89GA-3000MHz,89GB-3000MHz	Fix
AMSRbeamWidth	Beam width of AMSR	6G-1.8deg,10G-1.2deg,18G-0.64deg,23G-0.75deg,36G-0.35deg,50.3G-0,52G-0,89GA-0.15deg,89GB-0.15deg	Fix
OffNadir	Off-nadir angle	47.0deg: 89GB, 47.5deg: others	Fix
SpatialResolution(AzXEI)	Spatial resolution	6G-43.2kmX75.4km,10G-29.4kmX51.4km,18G-15.7kmX27.4km,23G-18.1kmX31.5km,36G-8.2kmX14.4km,50.3G- ,52G- ,89GA-3.7kmX6.5km,89GB-3.5kmX5.9km	Fix
ScanningPeriod	Scanning period	1.5sec	Fix
SwathWidth	Swath width	1450km	Fix
DynamicRange	Dynamic range	2.7K-340K	Fix
DataFormatType	Data format type	NCSA-HDF	Fix
HDFFormatVersion	HDF format version	Ver4.2r4	Fix
EllipsoidName	Earth ellipse model	WGS84	Fix
SemiMajorAxisofEarth	Earth equatorial radius	6378.1km	Fix
FlatteningRatioofEarth	Flattening ratio of earth	0.00335	Fix
SensorAlignment	Sensor alignment	Rx=0.00000,Ry=0.00000,Rz=0.00000	Fix
ThermistorCountRangeWx	The effective range of a thermistor engineering value conversion factor	60,585,770,872,924,952,961,1023	Fix

Table 1.2-2 Product Meta Items (2/4)

Items (Attribute Name)	Explanation	Concrete Values or Examples	Fix/ Example
ThermistorConversionTable Wa	Thermistor conversion table: Wa	0.000000,0.000015,0.000161,0.000618,0.002331,0.011459,0.010101,0.000000	Fix
ThermistorConversionTable Wb	Thermistor conversion table: Wb	0.000000,0.056460,-0.109878,-0.819170,-3.801865,-20.783040,-18.212120,0.000000	Fix
ThermistorConversionTable Wc	Thermistor conversion table: Wc	-35.000000,-38.250000,9.220000,284.170000,1582.770000,9480.000000,8263.350000,90.000000	Fix
ThermistorConversionTable Wd	Thermistor conversion table: Wd	0.0,0.0,0.0,0.0,0.0,0.0,0.0,0.0	Fix
Platinum#1CountRangeWx	Platinum#1 count range: Wx	1168,1296,1536,1752,4095	Fix
Platinum#1ConversionTable Wa	Platinum#1 conversion table: Wa	0.0,0.0,0.0,0.0,0.0	Fix
Platinum#1ConversionTable Wb	Platinum#1 conversion table: Wb	0.000000,0.039000,0.042000,0.039000,0.042000	Fix
Platinum#1ConversionTable Wc	Platinum#1 conversion table: Wc	-35.000000,-80.625000,-84.000000,-80.000000,-84.667000	Fix
Platinum#1ConversionTable Wd	Platinum#1 conversion table: Wd	0.0,0.0,0.0,0.0,0.0	Fix
Platinum#2CountRangeWx	Platinum#2 count range: Wx	272,1536,1792,2032,2288,3248,3712,4095	Fix
Platinum#2ConversionTable Wa	Platinum#2 conversion table: Wa	0.0,0.0,0.0,0.0,0.0,0.0,0.0,0.0	Fix
Platinum#2ConversionTable Wb	Platinum#2 conversion table: Wb	0.000000,0.078300,0.078000,0.083000,0.078000,0.083000,0.085300,0.000000	Fix
Platinum#2ConversionTable Wc	Platinum#2 conversion table: Wc	-140.000000,-161.440000,-160.000000,-169.333000,-158.750000,-170.667000,-177.640000,140.000000	Fix
Platinum#2ConversionTable Wd	Platinum#2 conversion table: Wd	0.0,0.0,0.0,0.0,0.0,0.0,0.0,0.0	Fix

Table 1.2-2 Product Meta Items (3/4)

Items (Attribute Name)	Explanation	Concrete Values or Examples	Fix/ Example
Platinum#3CountRangeWx	Platinum#3 count range: Wx	349,1454,2000,2555,3059,3566,4020,4095	Fix
Platinum#3ConversionTableWa	Platinum#3 conversion table: Wa	0.0,0.0,0.0,0.0,0.0,0.0,0.0,0.0	Fix
Platinum#3ConversionTableWb	Platinum#3 conversion table: Wb	0.000000,0.009100,0.009100,0.009100,0.009900,0.009900,0.008500,0.000000	Fix
Platinum#3ConversionTableWc	Platinum#3 conversion table: Wc	0.000000,6.845000,6.803800,6.803800,4.719500,4.719500,9.835000,44.000000	Fix
Platinum#3ConversionTableWd	Platinum#3 conversion table: Wd	0.0,0.0,0.0,0.0,0.0,0.0,0.0,0.0	Fix
CoefficientAvv	Coefficient: Avv	6G-1.037,10G-1.032,18G-1.025,23G-1.032,36G-1.029,50G-0.000,52G-0.000,89GA-1.025,89GB-1.029	Fix
CoefficientAhv	Coefficient: Ahv	6G--0.003,10G--0.003,18G--0.003,23G--0.004,36G--0.004,50G-0.000,52G-0.000,89GA--0.003,89GB--0.004	Fix
CoefficientAov	Coefficient: Aov	6G--0.034,10G--0.029,18G--0.022,23G--0.028,36G--0.024,50G-0.000,52G-0.000,89GA--0.022,89GB--0.024	Fix
CoefficientAhh	Coefficient: Ahh	6G-1.037,10G-1.031,18G-1.025,23G-1.034,36G-1.029,50G-0.000,52G-0.000,89GA-1.028,89GB-1.031	Fix
CoefficientAvh	Coefficient: Avh	6G--0.003,10G--0.002,18G--0.003,23G--0.006,36G--0.004,50G-0.000,52G-0.000,89GA--0.006,89GB--0.006	Fix
CoefficientAoh	Coefficient: Aoh	6G--0.034,10G--0.029,18G--0.022,23G--0.028,36G--0.024,50G-0.000,52G-0.000,89GA--0.022,89GB--0.024	Fix
CSMtemperature	Brightness temperature of deep space	6GV-2.800, 6GH-2.800, 10GV-2.800, 10GH-2.800, 18GV-2.800, 18GH-2.800, 23GV-2.800, 23GH-2.800, 36GV-2.800, 36GH-2.800, 50GV-0.000, 52GV-0.000, 89GAV-2.800, 89GAH-2.800, 89GBV-2.800, 89GBH-2.800	Fix
CoRegistrationParametererA1	Co-registration parameter: A1	6G-1.10450, 10G-0.65040, 18G-0.67990, 23G-0.74050, 36G-0.68490, 50G-0.00000	Example
CoRegistrationParametererA2	Co-registration parameter: A2	6G--1.04960, 10G--0.64760, 18G--0.20170, 23G--0.26610, 36G--0.21810, 50G-0.00000	Example

Table 1.2-2 Product Meta Items (4/4)

Items (Attribute Name)	Explanation	Concrete Values or Examples	Fix/ Example
CalibrationCurve Coefficient#1	The radiometric correction coefficient for the 0th order	6GV--0.2099101, 6GH--0.2054645, 10GV--0.0580782, 10GH--0.0103279, 18GV--0.0853578, 18GH--0.0435186, 23GV--0.1288643, 23GH--0.1288643, 36GV--0.0475611, 36GH--0.0536047, 50GV-0.0000000, 52GV-0.0000000, 89GAV--0.0278573, 89GAH--0.0447590, 89GBV--0.0273764, 89GBH--0.0316265	Example
CalibrationCurve Coefficient#2	The radiometric correction coefficient for the 1st order	6GV-1.0756783, 6GH-1.0740756, 10GV-1.0209393, 10GH-1.0037236, 18GV-1.0307711, 18GH-1.0156885, 23GV-1.0464586, 23GH-1.0464586, 36GV-1.0171470, 36GH-1.0193259, 50GV-0.0000000, 52GV-0.0000000, 89GAV-1.0100426, 89GAH-1.0161356, 89GBV-1.0098693, 89GBH-1.0114014	Example
CalibrationCurve Coefficient#3	The radiometric correction coefficient for the 2nd order	6GV--0.0002537, 6GH--0.0002483, 10GV--0.0000704, 10GH--0.0000125, 18GV--0.0001022, 18GH--0.0000522, 23GV--0.0001556, 23GH--0.0001556, 36GV--0.0000575, 36GH--0.0000648, 50GV-0.0000000, 52GV-0.0000000, 89GAV--0.0000334, 89GAH--0.0000537, 89GBV--0.0000329, 89GBH--0.0000379	Example
CalibrationCurve Coefficient#4	The radiometric correction coefficient for the 3rd order	6GV-0.0000000, 6GH-0.0000000, 10GV-0.0000000, 10GH-0.0000000, 18GV-0.0000000, 18GH-0.0000000, 23GV-0.0000000, 23GH-0.0000000, 36GV-0.0000000, 36GH-0.0000000, 50GV-0.0000000, 52GV-0.0000000, 89GV-0.0000000, 89GH-0.0000000	Example
CalibrationCurve Coefficient#5	The radiometric correction coefficient for the 4th order	6GV-0.0000000, 6GH-0.0000000, 10GV-0.0000000, 10GH-0.0000000, 18GV-0.0000000, 18GH-0.0000000, 23GV-0.0000000, 23GH-0.0000000, 36GV-0.0000000, 36GH-0.0000000, 50GV-0.0000000, 52GV-0.0000000, 89GV-0.0000000, 89GH-0.0000000	Example
CalibrationMethod	Calibration method name	RxTemperatureReferenced,SpillOver,CSMInterpolation, Absolute89GPositioning,NonlinearityCorrection * RxTemperatureReferenced may be changed into HTUCoefficients or ElectromagneticAnalysis	Example
HTSCorrectionParameter Version	Parameter version of the HTS correction.	ver0002	Example
SpillOverParameterVersion	Parameter version of the CSM spill over correction	ver0001	Example
CSMInterpolationParameter Version	Parameter version of the CSM interpolation correction	ver0001	Example
Absolute89Gpositioning ParameterVersion	Parameter version of the correction for absolute positions of 89 GHz	ver0002	Example

Table 1.2-3 Data Items, Sizes and Scaling Factors (1/2)

No.	Items	Byte	Type	Scaling factor	No. of samples per scan	Units	Dimension
1	Scan_Time	8	double	1.0	1	sec	nscan
2	Position_in_Orbit	8	double	1.0	1	-	nscan
3	Navigation_Data	6*4	float	1.0	6	m,m/s	nscan
4	Attitude_Data	3*4	float	1.0	3	deg	nscan
5	6GHz-V_Observation_Count	2	signed int	1.0	243	Count	243*nscan
6	6GHz-H_Observation_Count	2	signed int	1.0	243	Count	243*nscan
7	10.65GHz-V_Observation_Count	2	signed int	1.0	243	Count	243*nscan
8	10.65GHz-H_Observation_Count	2	signed int	1.0	243	Count	243*nscan
9	18.7GHz-V_Observation_Count	2	signed int	1.0	243	Count	243*nscan
10	18.7GHz-H_Observation_Count	2	signed int	1.0	243	Count	243*nscan
11	23.8GHz-V_Observation_Count	2	signed int	1.0	243	Count	243*nscan
12	23.8GHz-H_Observation_Count	2	signed int	1.0	243	Count	243*nscan
13	36.5GHz-V_Observation_Count	2	signed int	1.0	243	Count	243*nscan
14	36.5GHz-H_Observation_Count	2	signed int	1.0	243	Count	243*nscan
15	50.3GHz-V_Observation_Count	#1	signed int	1.0	243	Count	243*nscan
16	52.8GHz-V_Observation_Count	#1	signed int	1.0	243	Count	243*nscan
17	89.0GHz-V-A_Observation_Count	2	signed int	1.0	486	Count	486*nscan
18	89.0GHz-V-B_Observation_Count	2	signed int	1.0	486	Count	486*nscan
19	89.0GHz-H-A_Observation_Count	2	signed int	1.0	486	Count	486*nscan
20	89.0GHz-H-B_Observation_Count	2	signed int	1.0	486	Count	486*nscan

#1: 50GHz and 52GHz are filled with 0 for AMSR-E.

Table 1.2-3 Data Items, Sizes and Scaling Factors (2/2)

No.	Items	Byte	Type	Scale factor	No. of samples per scan	Units	Dimension
21	Hot_Load_Count_6_to_52	2	signed int	1.0	16	Count	16*nscan*12
22	Hot_Load_Count_89	2	signed int	1	32	Count	32*nscan*4
23	Cold_Sky_Mirror_Count_6_to_52	2	signed int	1	16	Count	16*nscan*12
24	Cold_Sky_Mirror_Count_89	2	signed int	1	32	Count	32*nscan*4
25	Antenna_Temp_Coef(Of+S1)	4	float	1	32	K+K/Cnt	32*nscan
26	Rx_Offset/Gain_Count	2	unsigned int	1	32	Count	32*nscan
27	Lat_of_Observation_Point_Except_89B	2	signed int	0.01	486	deg	486*nscan
28	Long_of_Observation_Point_Except_89B	2	signed int	0.01	486	deg	486*nscan
29	Lat_of_Observation_Point_for_89B	2	signed int	0.01	486	deg	486*nscan
30	Long_of_Observation_Point_for_89B	2	signed int	0.01	486	deg	486*nscan
31	Sun_Azimuth	2	signed int	0.1	243	deg	243*nscan
32	Sun_Elevation	2	signed int	0.1	243	deg	243*nscan
33	Earth_Incidence #2	1	signed char	0.02	243	deg	243*nscan
34	Earth_Azimuth	2	signed int	0.01	243	deg	243*nscan
35	Land/Ocean_Flag_for_6_10_18_23_36_50_89A	1	unsigned char	1	243	%	243*nscan*7
36	Observation_Supplement	2	-	1	27	-	27*nscan
37	SPC_Temperature_Count	2	unsigned int	1	20	Count	20*nscan
38	SPS_Temperature_Count	2	unsigned int	1	32	Count	32*nscan
39	Data_Quality	4	float	1	128	-	128*nscan
40	Interpolation_Flag6_to_52	1	-	1	16	-	16*nscan*12
41	Interpolation_Flag_89	1	-	1	32	-	32*nscan*4
42	Spill_Over	4	float	1	243	mV	243*200scan*2

#2: The Earth Incidence has also sub-attribute "OFFSET". This offset is set to 55.0.




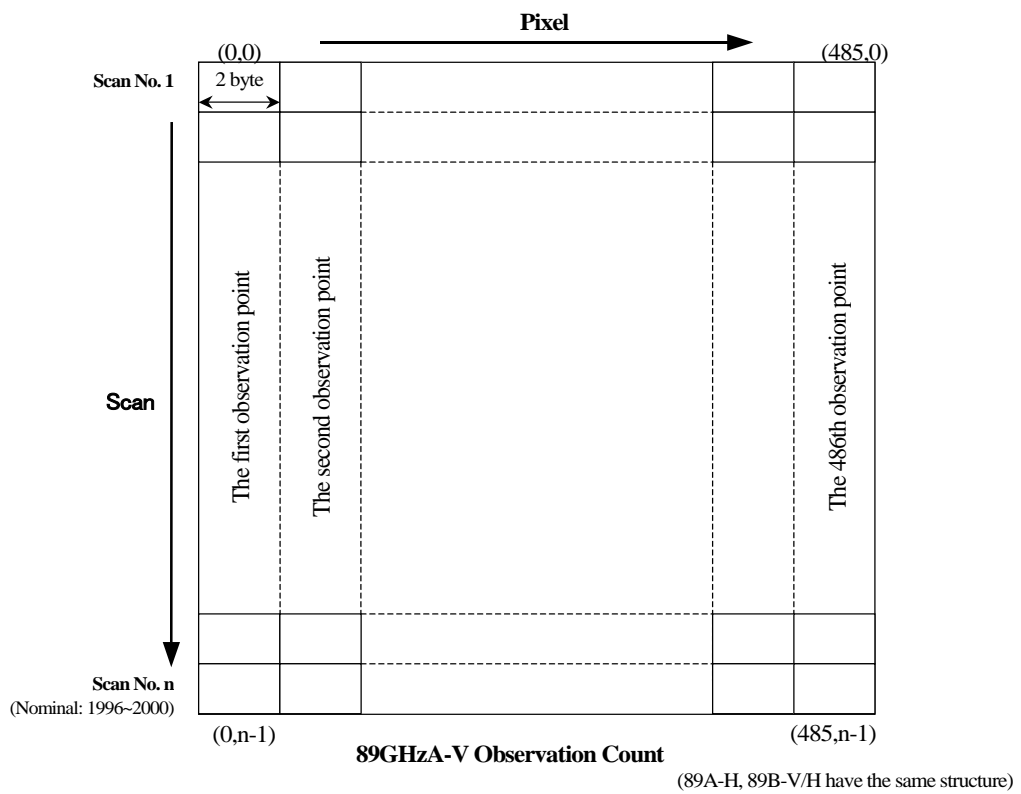


Figure 1.2-2 The Structure of Observation Count

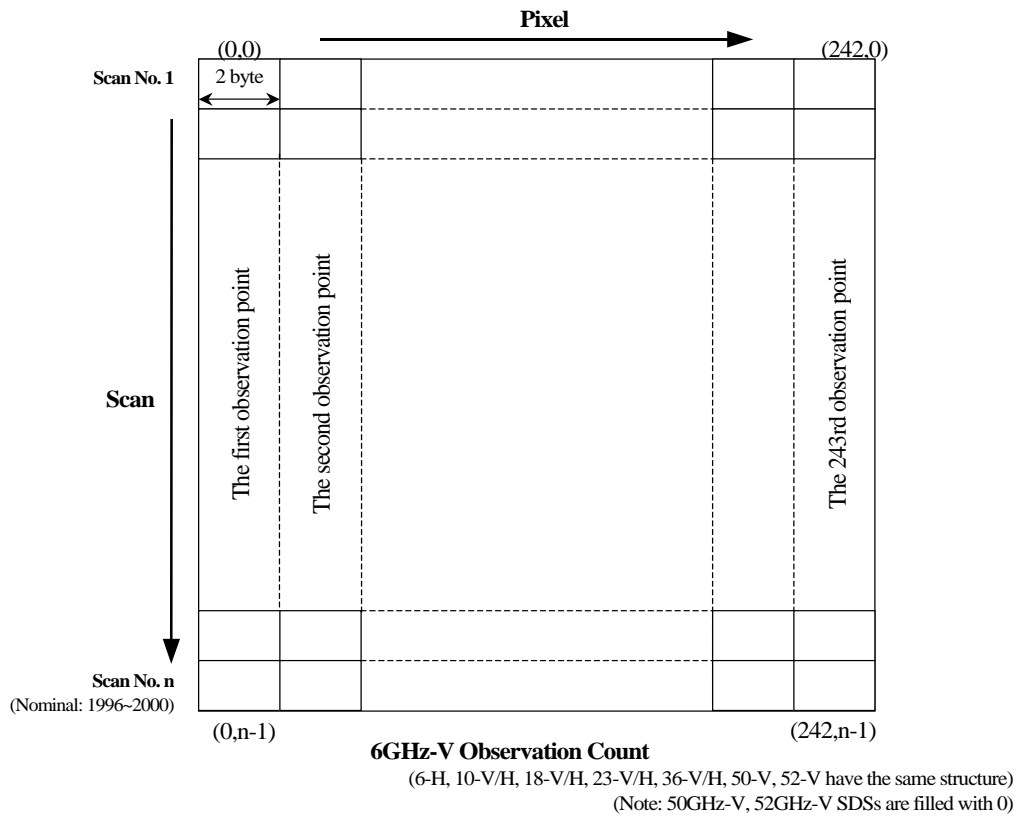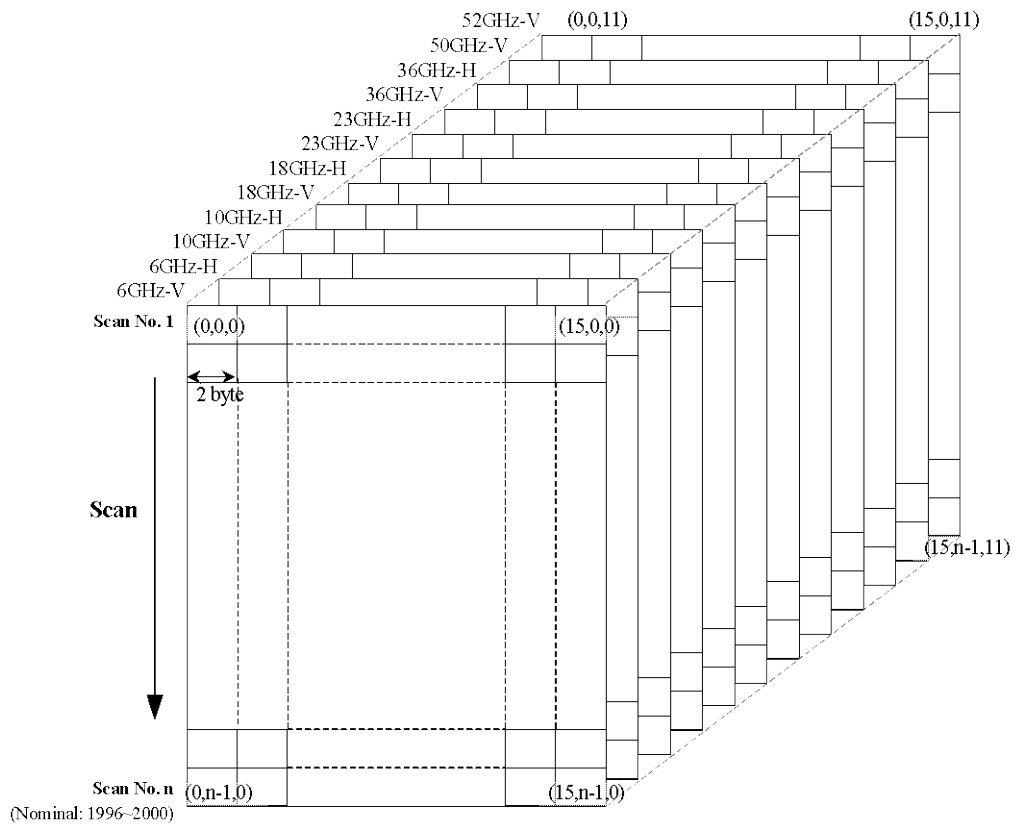

Hot Load Count 6 to 52
Cold Sky Mirror Count 6 to 52

(Hot Load and Cold Sky Mirror Count have the same structure.)
 (Note: 50GHz-V, 52GHz-V SDS are filled with 0)

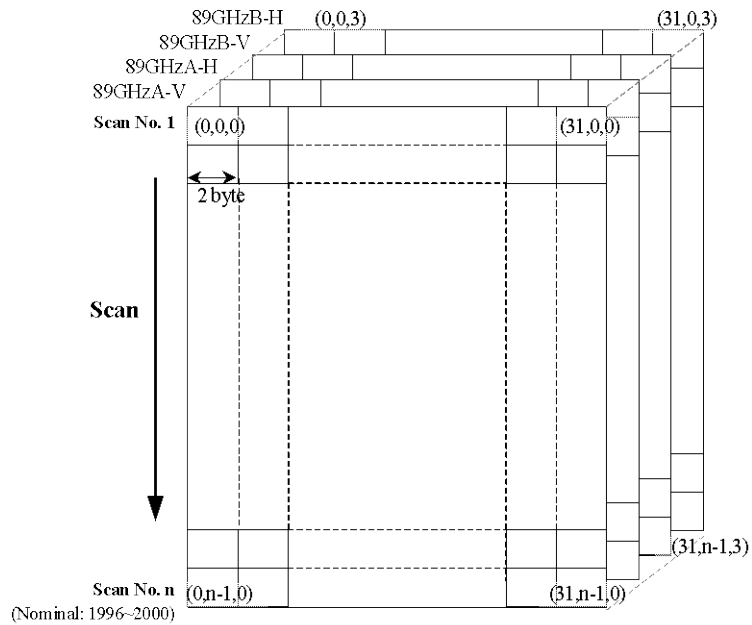

Hot Load Count 89

Figure 1.2-3 The Structure of Hot Load Count, Cold Sky Mirror Count

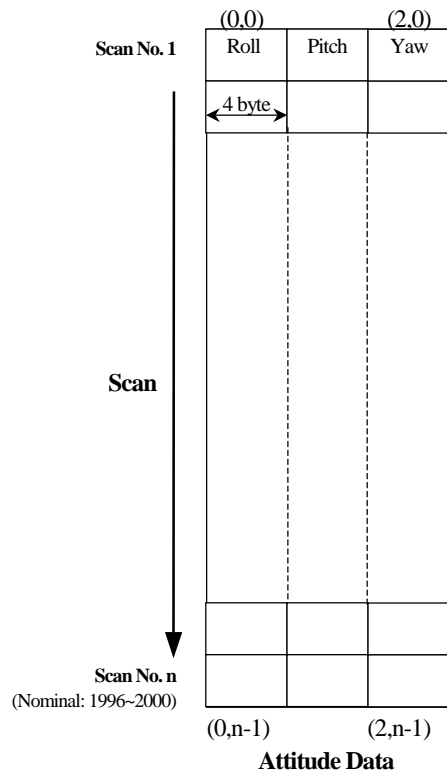
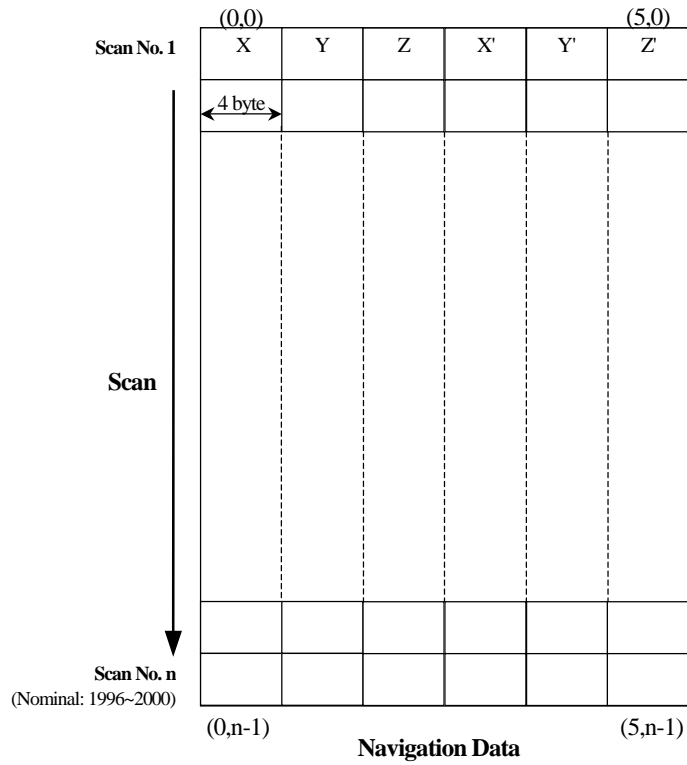


Figure 1.2-4 The Structure of Navigation Data, Attitude Data

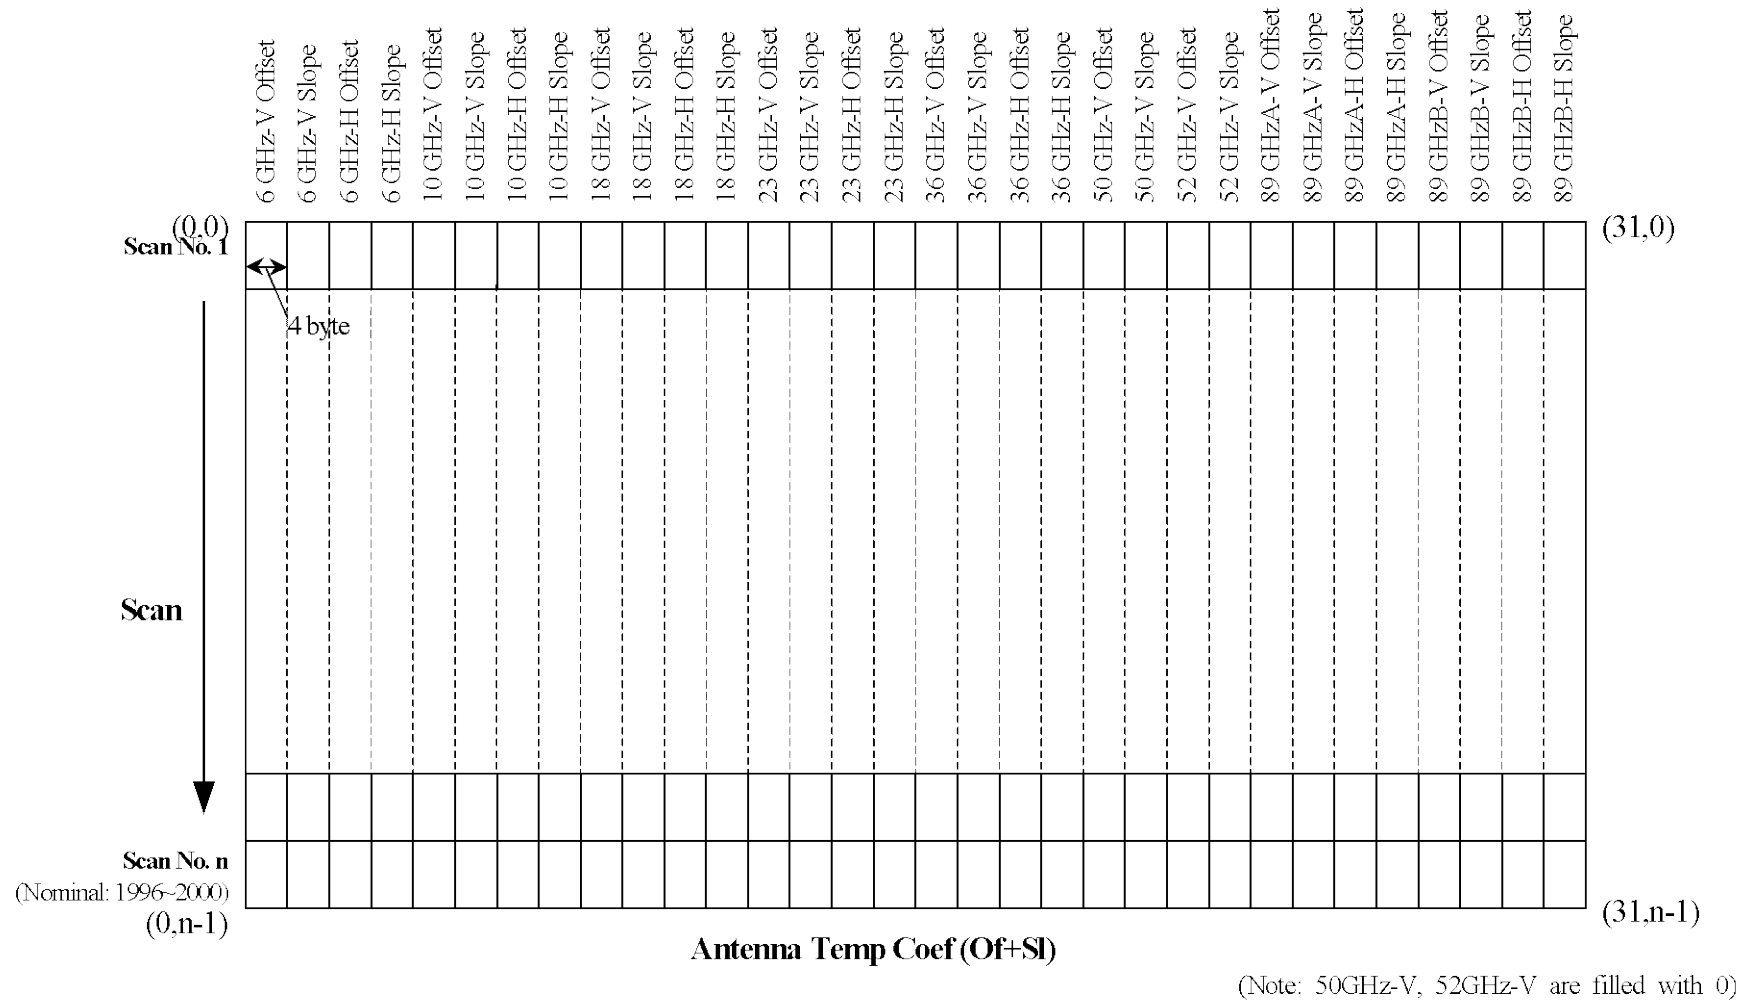


Figure 1.2-5 The Structure of Antenna Temp Coef.

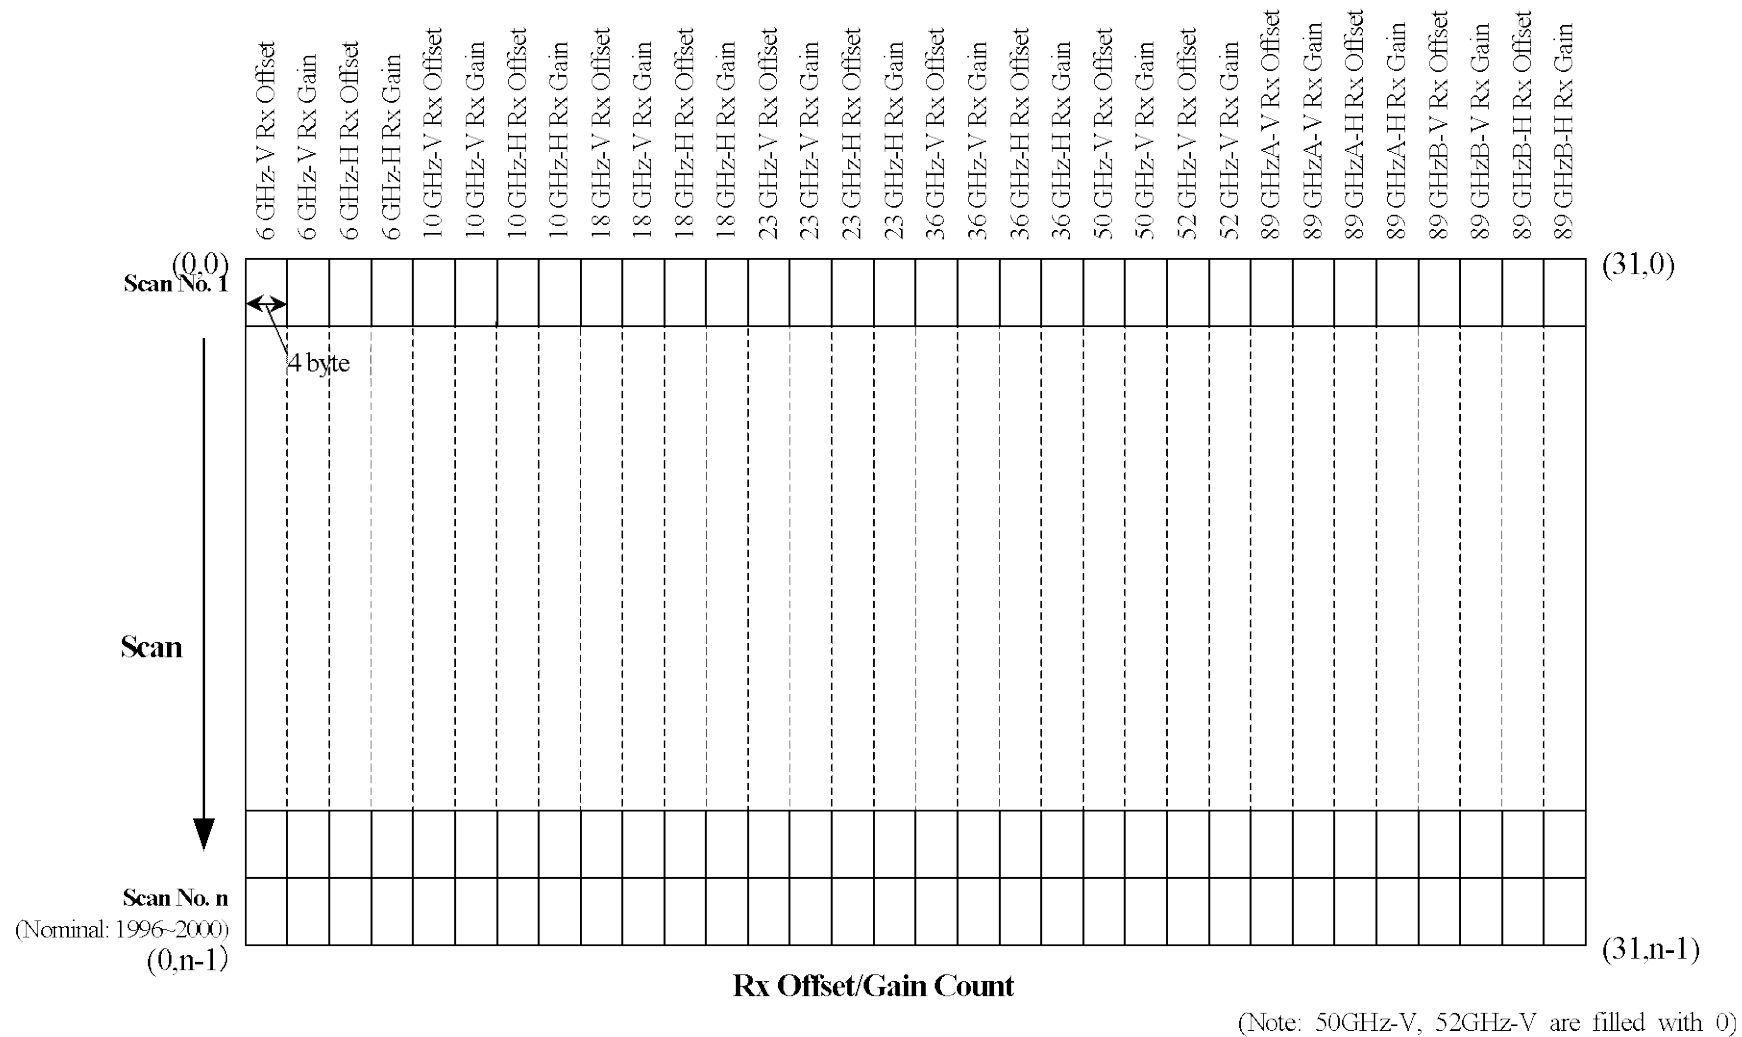


Figure 1.2-6 The Structure of Rx Offset/Gain Count

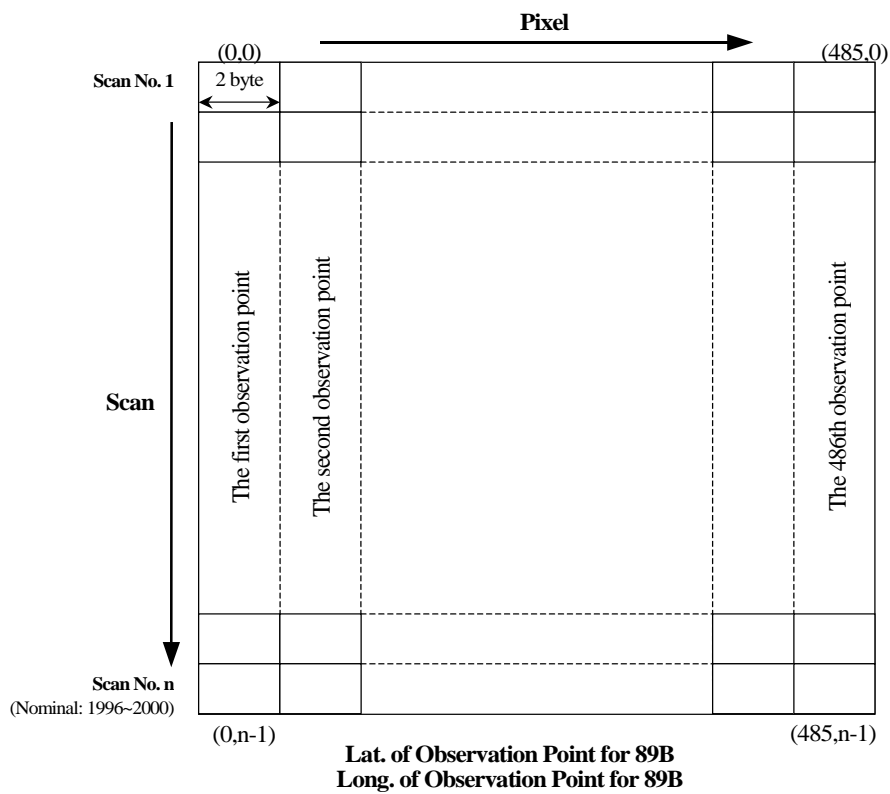
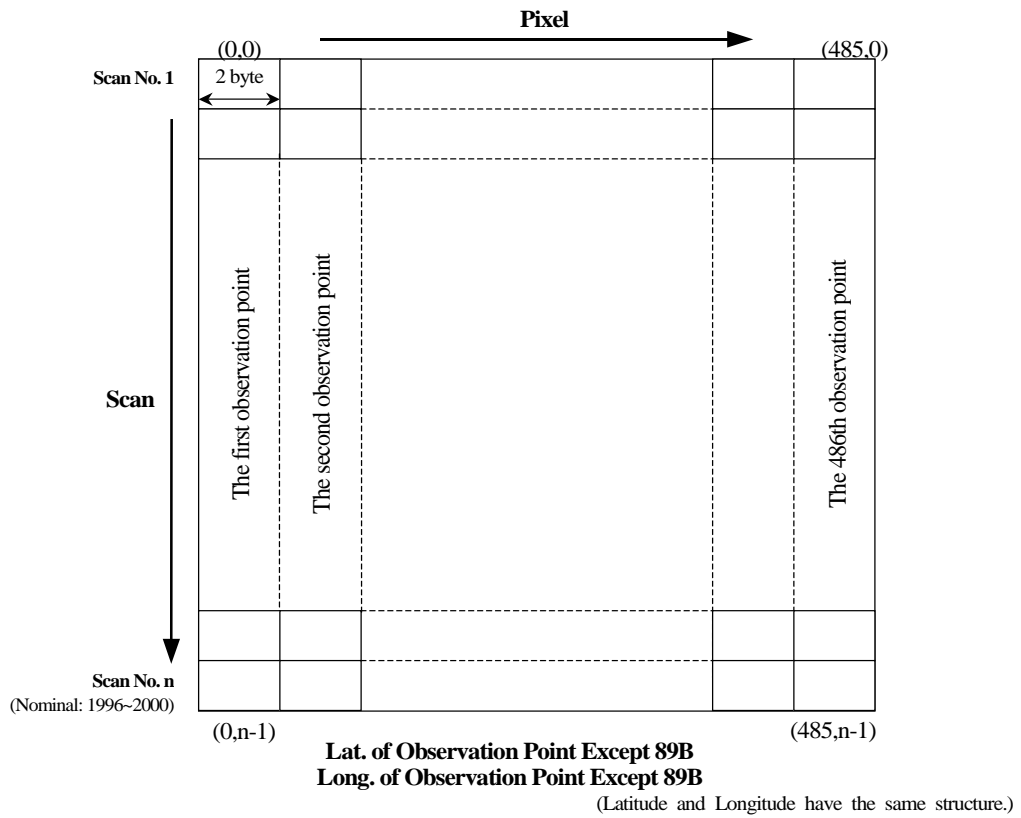


Figure 1.2-7 The Structure of Lat. of Observation Point, Long. of Observation Point

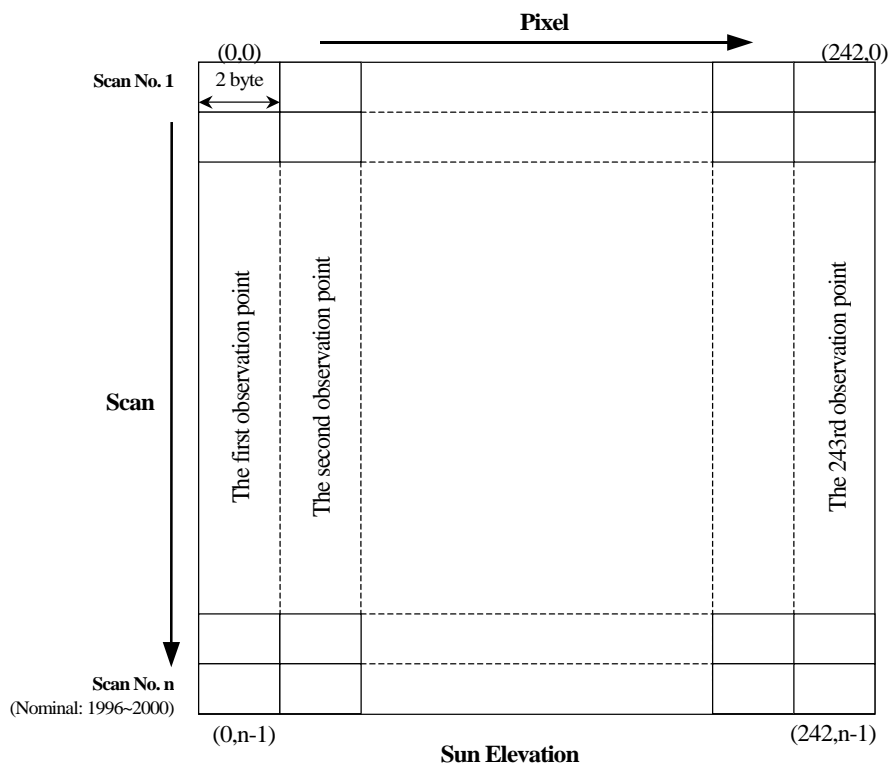
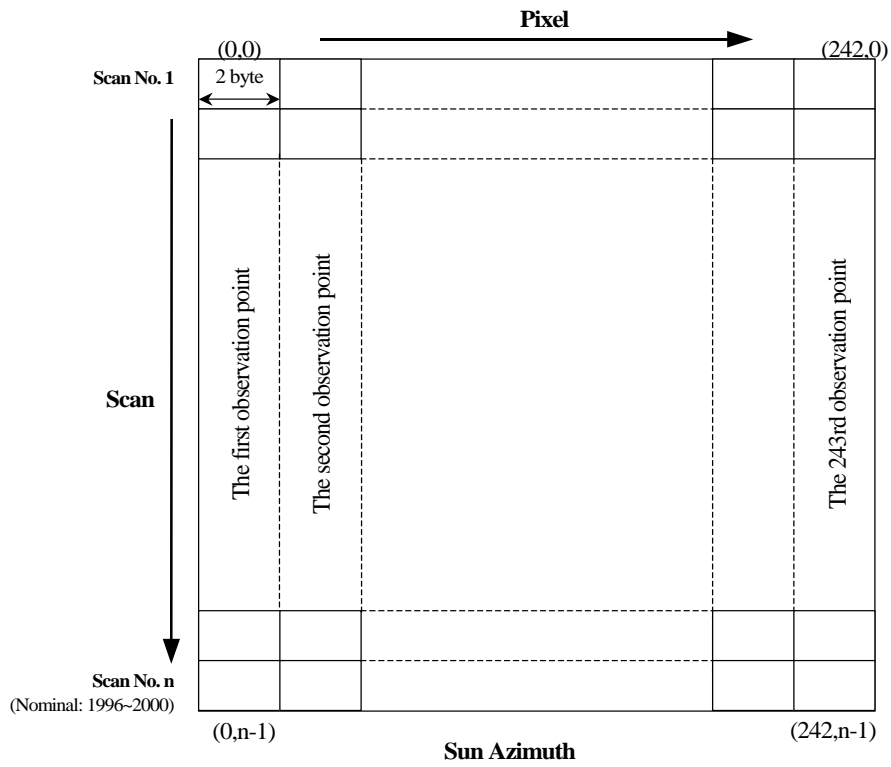


Figure 1.2-8 The Structure of Sun Azimuth, Sun Elevation

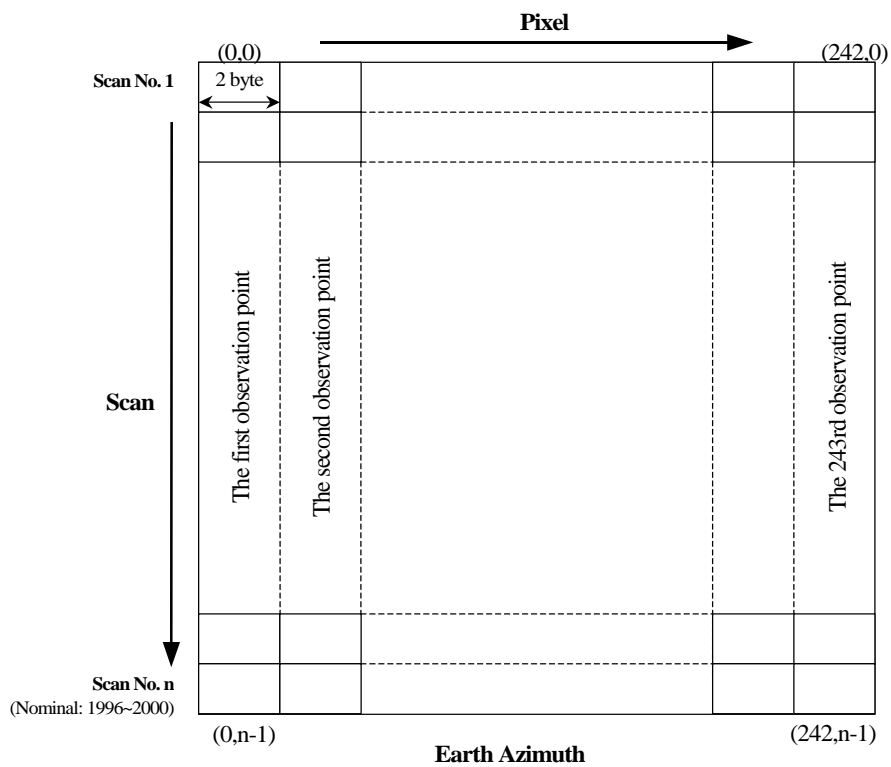
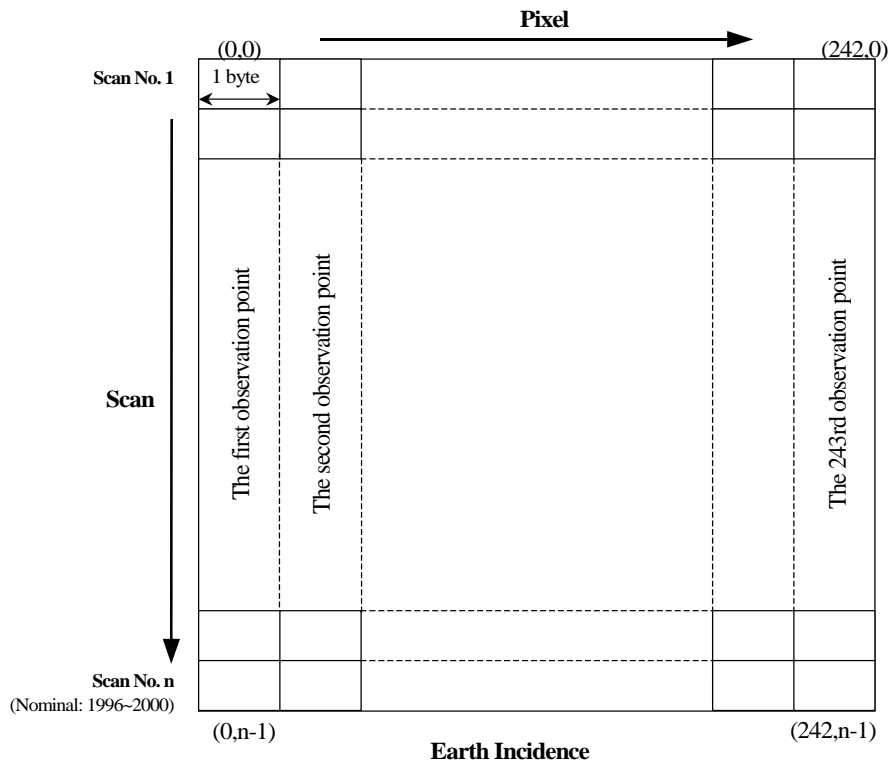


Figure 1.2-9 The Structure of Earth Incidence, Earth Azimuth

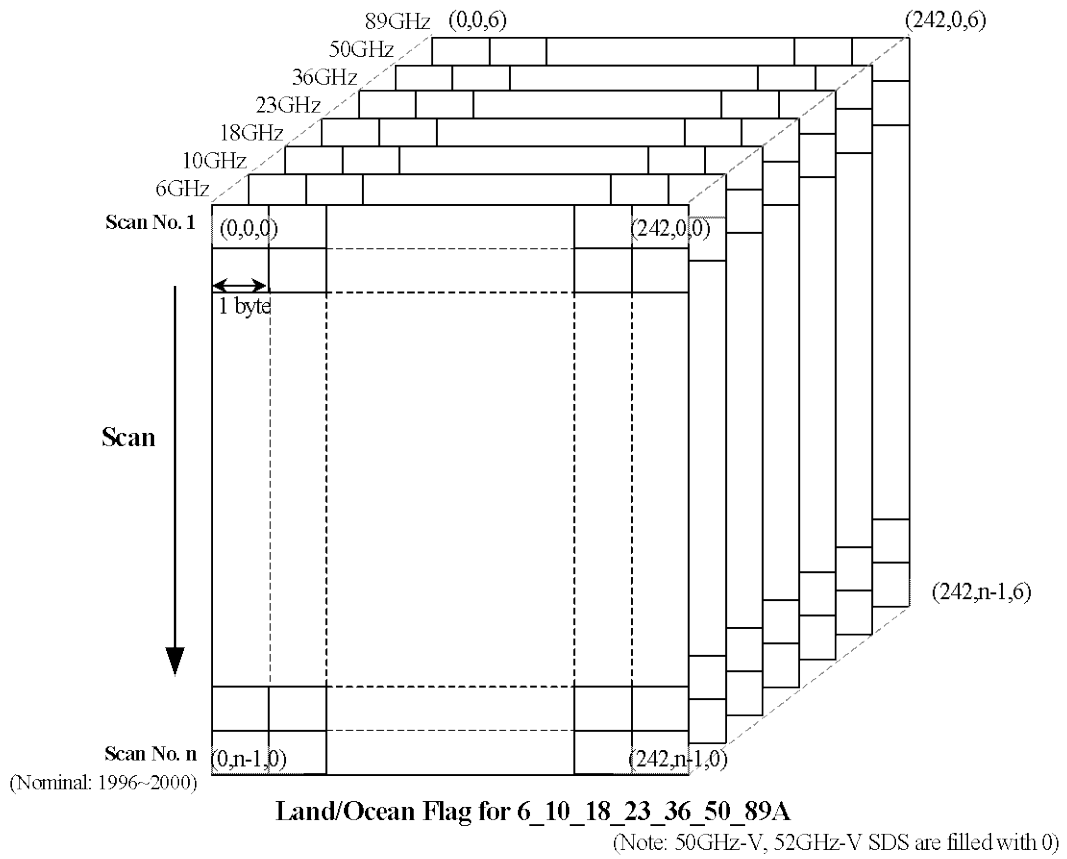


Figure 1.2-10 The Structure of Land/Ocean Flag

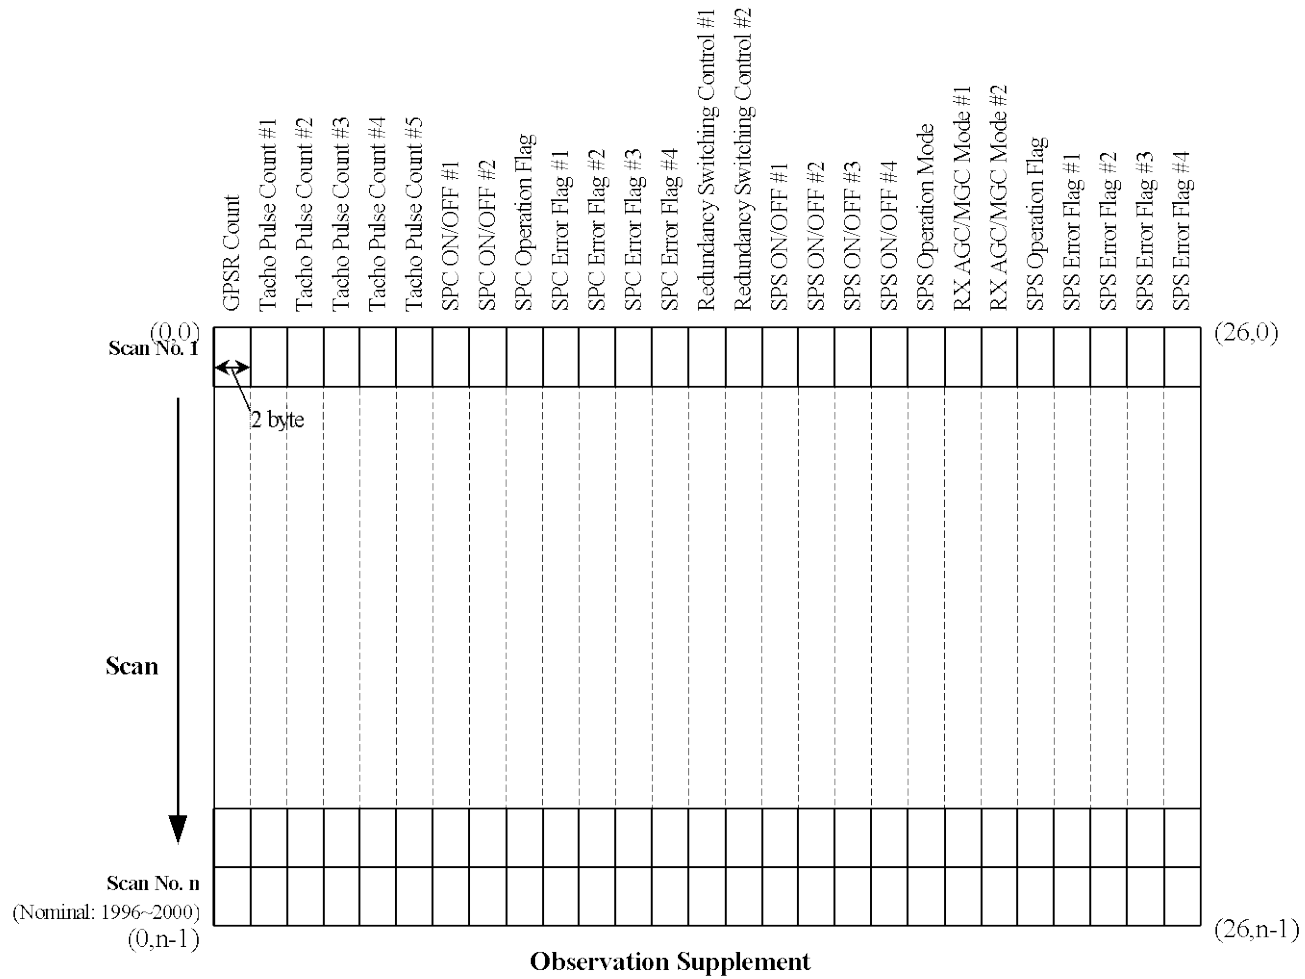


Figure 1.2-11 The Structure of Observation Supplement

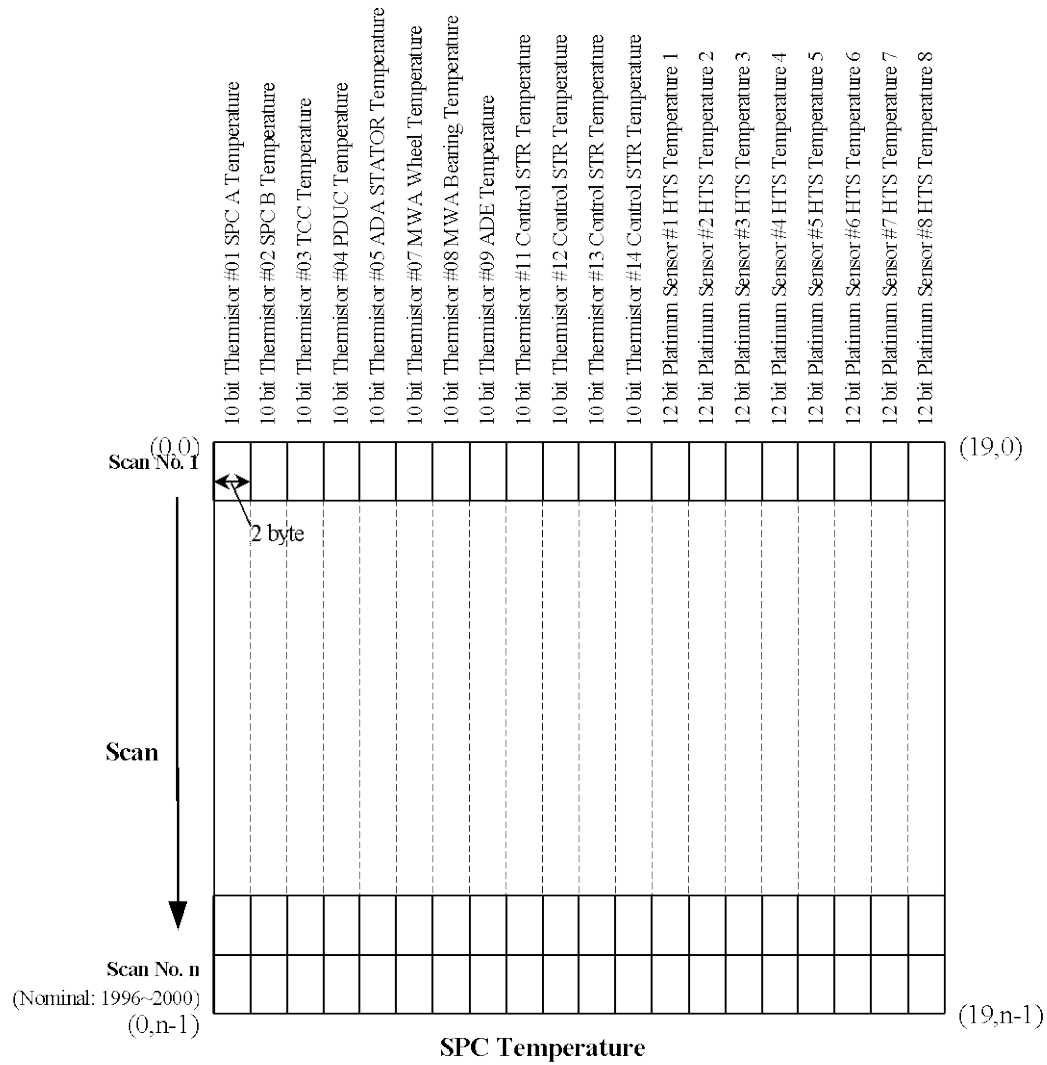


Figure 1.2-12 The Structure of SPC Temperature Count (0-19)



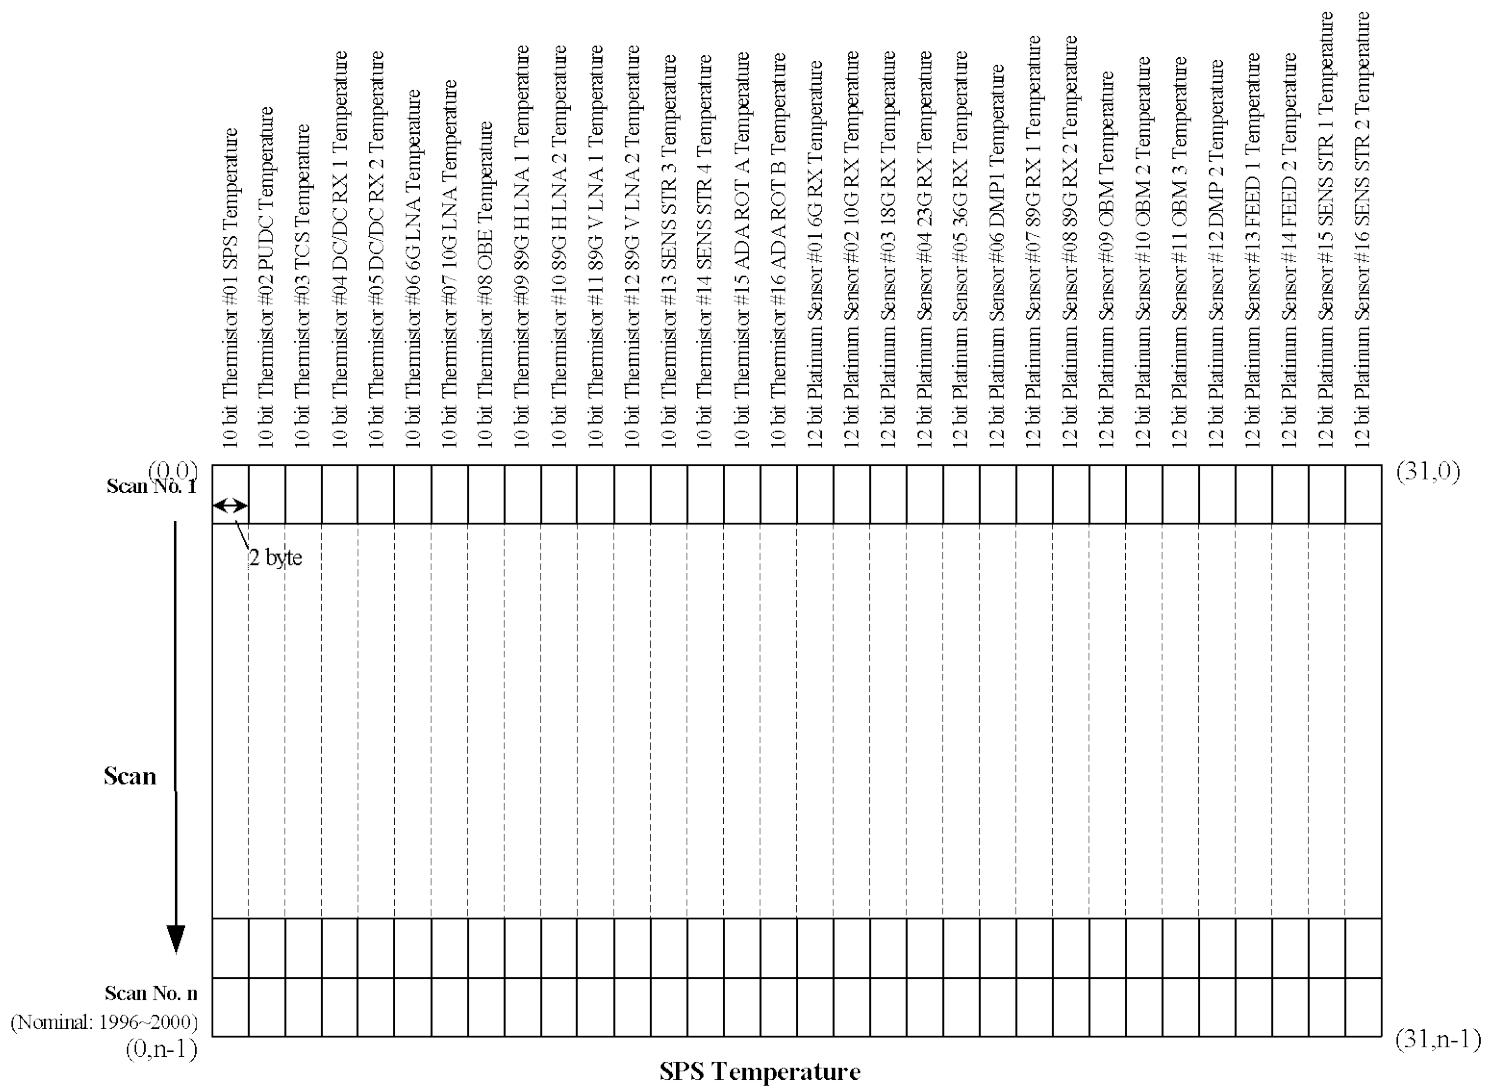



Figure 1.2-13 The Structure of SPS Temperature Count (0-31)

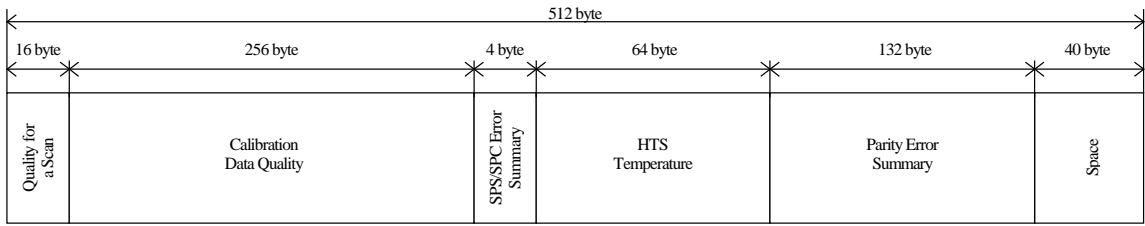


Quality for a Scan

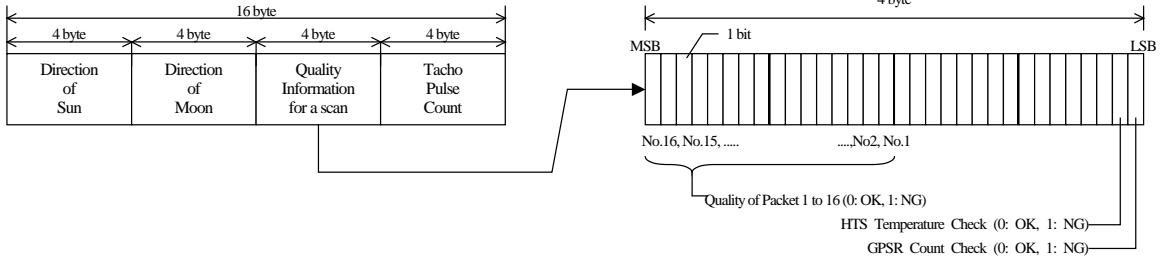


Calibration Data Quality

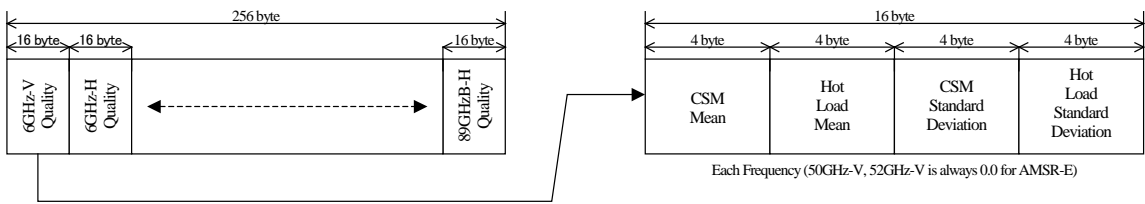


SPC/SPS Error Flag



HTS Temperature

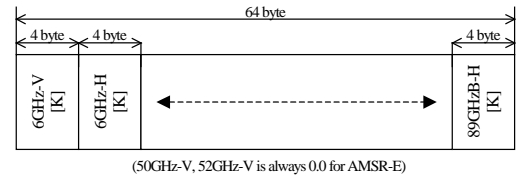

Parity Error Summary

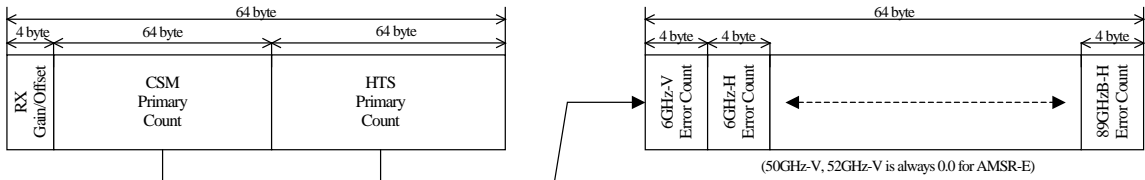

Spare




Figure 1.2-14 The Structure of Data Quality

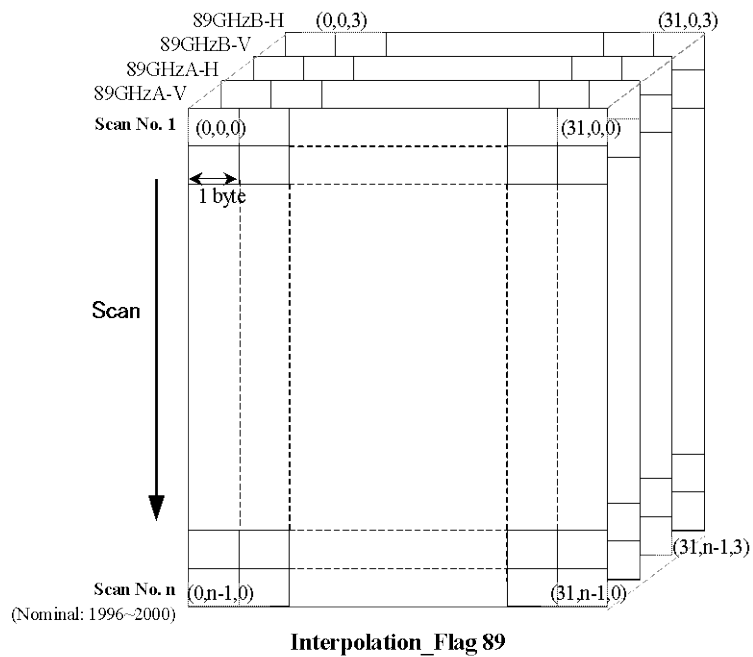
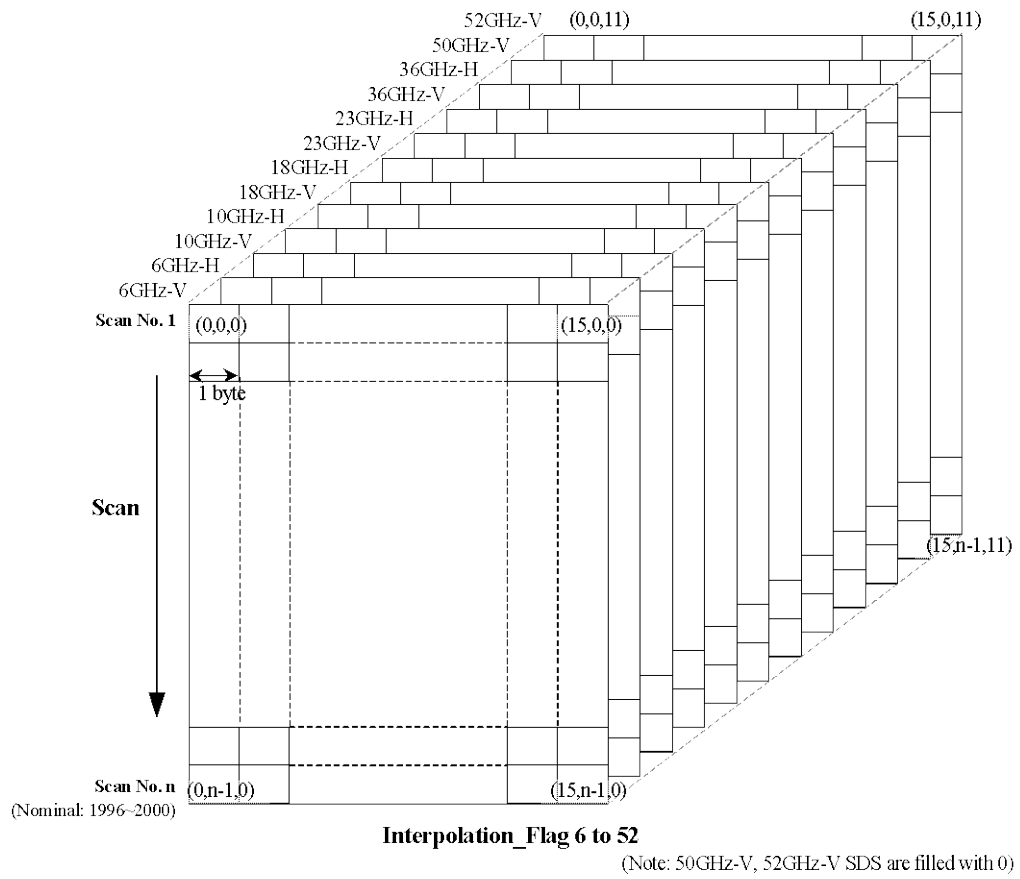


Figure 1.2-15 The Structure of Interpolation Flag

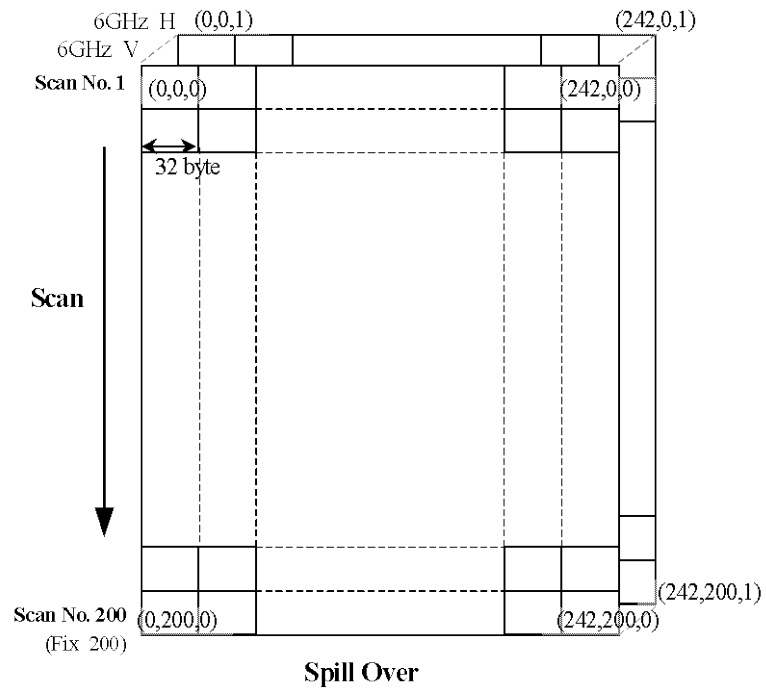


Figure 1.2-16 The Structure of Spill Over

1.3 Data Size of one Level 1A Product

The data size of one AMSR-E level 1A product file is shown in Table 1.3-1 in case of 2000 scans. However, the actual file size is 8% smaller because HDF is a compressed format.

Table 1.3-1 Estimation of the Data Volume

AMSR-E Product Data Size				
Item	No. of Samples	No. of Bytes	Semi Total	Remark
Scan Time	1	8	8	
Position in Orbit	1	8	8	
6GHz-V Observation Count	243	2	486	
6GHz-H Observation Count	243	2	486	
10.65GHz-V Observation Count	243	2	486	
10.65GHz-H Observation Count	243	2	486	
18.7GHz-V Observation Count	243	2	486	
18.7GHz-H Observation Count	243	2	486	
23.8GHz-V Observation Count	243	2	486	
23.8GHz-H Observation Count	243	2	486	
36.5GHz-V Observation Count	243	2	486	
36.5GHz-H Observation Count	243	2	486	
50.3GHz-V Observation Count	243	2	486	
52.8GHz-H Observation Count	243	2	486	
89.9GHz-V-A Observation Count	486	2	972	
89.9GHz-H-A Observation Count	486	2	972	
89.9GHz-V-B Observation Count	486	2	972	
89.9GHz-H-B Observation Count	486	2	972	
Hot Load Count 6 to 52	16	2	384	(16*2) * 12 freq
Hot Load Count 89	32	2	256	(32*2) * 4 freq
Cold Sky Mirror Count 6 to 52	16	2	384	(16*2) * 12 freq
Cold Sky Mirror Count 89	32	2	256	(32*2) * 4 freq
Antenna Temp Coef (Of + Sl)	32	4	128	
Rx Offset/Gain Count	32	2	64	
Navigation Data	6	4	24	
Attitude Data	3	4	12	
Lat of Observation Point Except 89B	486	2	972	
Long of Observation Point Except 89B	486	2	972	
Lat of Observation Point for 89B	486	2	972	
Long of Observation Point for 89B	486	2	972	
Sun Azimuth	243	2	486	A scan only
Sun Elevation	243	2	486	A scan only
Earth Incidence	243	1	243	A scan only
Earth Azimuth	243	2	486	A scan only
Land/Ocean Flag	243	1	1701	1*7 for 6,10,23,37,50,89A
Observation Support	27	2	54	
SPC Temperature Count	20	2	40	
SPS Temperature Count	32	2	64	
Data Quality	512	4	2048	
Interpolation_Flag 6 to 52	16	1	192	(16*1) * 12 freq
Interpolation_Flag 89	32	1	128	(32*1) * 4 freq
Spill Over	243	4	1944	* 2 freq * 200 Scans
Total			23004	
Volume/Granule (MB)			40.5	2000 Scan/Scene
Volume/Day (GB)			1.1	29 Files/Day
Volume/Month (GB)			34.4	30 Days/Month

1.4 The Others

1.4.1 File Name Convention

The file name convention of AMSR-E level 1 product (1A, 1B, 1BMap) is shown below. The Granule ID obeys the Granule ID convention in Earth Observation Center of JAXA.

GranuleID + Extensions(.00)

1.4.2 Definition of the Product Data Range

The data range of AMSR-E level 1 product (only in case of 1A and 1B) is the half orbit defined as a scene (Figure 1.4.2-1) and extended about 10 scans at both ends. The both ends of a half orbit correspond to the maximum and minimum latitude of the observation point at the center of the scan.

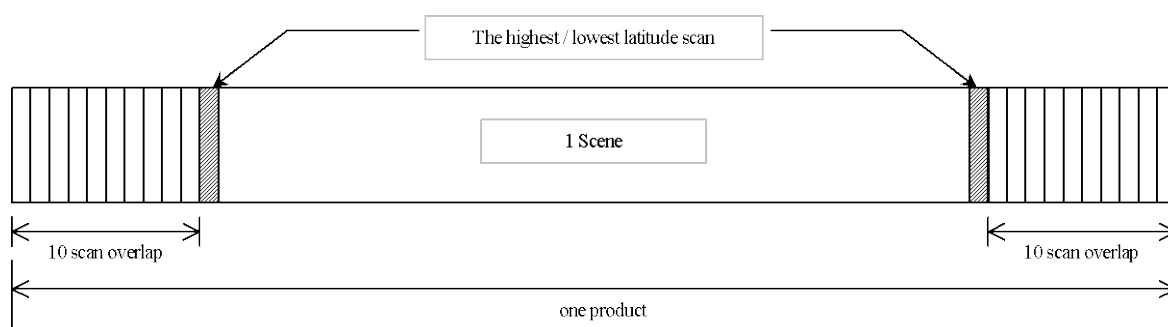


Figure 1.4.2-1 Definition of One Product Range

1.4.3 Coordinate System

AMSR-E level 1 product (1A, 1B) stores observation position (latitude, longitude) and orbit information of satellite. An observation position is expressed in Greenwich coordinate system (Earth Fixed Coordinate). The range of the east longitude is from 0 to 180 degrees and the range of the west longitude is from 0 to -180 degrees. Similarly, the range of the north latitude is from 0 to 90 degrees, the range of the south latitude is from 0 to -90 degrees. Earth model of WGS84 is adopted for geometric calculation. On the other hand, the orbit information is stored as the inertia coordinate system of J2000.0.

1.4.4 Scaling Factor

In order to make data volume small, scaling factors are applied for some floating number in AMSR-E level 1 product (1A, 1B). The scale factor is stored with the data unit in the attribute information on Vdata or SDS.

2 Data Explanation

This chapter shows explanation of each data item of AMSR-E level 1A product including common items for level 1B and level 1BMap.

2.1 Core Metadata

(1) ShortName

The abbreviated name of a product is stored. The fixed abbreviated names of each processing level are shown below.

AMSREL1A	Level 1A
AMSREL1B	Level 1B
AMSREL1M	Level 1B Map

(2) VersionID

“RELEASEx” (x is version ID) is stored as the product version.

(3) SizeMBESDataGranule

The size (Mbytes) of the product is stored.

(4) LocalGranuleID

The Granule ID based on JAXA EOC ID convention is stored. The Granule ID for level 1A is as follows.

P1AMEYYMMDDPPPMX	–	KNLL000000
[Scene ID]		
P1		P1 (Fixed: EOS-PM1 Aqua)
AME		AME (Fixed: AMSR-E)
YYMMDD		Date of data acquisition start (UT)
PPP		Path number at the observation start point (001 – 233)
M		M or R (M: regular process / re-process, R: near real time process)
X		A or D (Orbit direction, A: Ascending, D: Descending)
[Product ID]		
K		P or L (P: regular process / re-process, L: near real time process)
N		0 (Fixed: Spare)
LL		1A (Fixed: for level 1A)
000000		0 (Fixed: Spare)

(5) ProcessingLevelID

The processing level is stored. ID of each processing level is shown below.

L1A	Level 1A
L1B	Level 1B
L1M	Level 1B Map

(6) ReprocessingActual

The re-processing date (UT) is stored in case of using a level 1A product itself. A blank is stored in other cases.

(7) ProductionDateTime

The production time (UT) is stored.

(8) RangeBeginningTime, RangeBeginningDate, RangeEndingTime, RangeEndingDate

The observation start and end time of 89 GHz A-horn's observation are stored. The start and end time of the product are the scan beginning time of the southernmost and northernmost point, which does not contain extended scans. However, in the case of a short size product that does not include a pole region, the scanning time of each end is stored.

(9) GringPointLatitude, GringPointLongitude

Eight representative latitude and longitude of the outline for the observation are stored. They are set as a clockwise from the scanning start position, and these positions are observation points of 89 GHz A-horn. Since the spatial information in a product cannot be expressed as a rectangle on the equidistant cylindrical projection map, it is expressed in polygon like "G" (Figure 2.1-1).

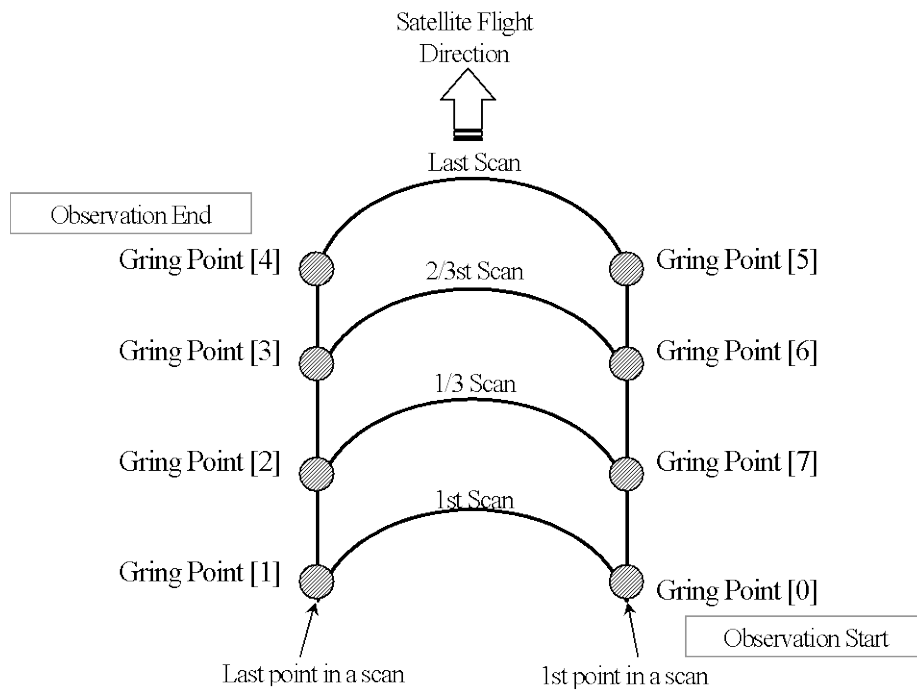


Figure 2.1-1 The combination of the Gring

(10) PGEName

The product generation software name is stored. The name of each processing level is shown below.

L1A_Process_Software	Level 1A
L1B_Process_Software	Level 1B
L1BMap_Process_Software	Level 1B Map

(11) PGEVersion

The version number of the AMSR-E level 1 processing system is stored. The version number consists of four versions shown below, and total is 18 characters.

System version (10 characters) + Level 1 software version (3 characters)
+ Algorithm version (3 characters) + System parameters version (2 characters)

(12) InputPointer

The science data file names used for processing are stored.

(13) ProcessingCenter, ContactOrganizationName

The contact of JAXA/EOC is stored as the offer organization of the level 1 product.

(14) StartOrbitNumber, StopOrbitNumber

The orbit number of the satellite in a start/end position for a product is stored. The orbit number of AMSR-E is sequential from the Aqua launch.

(15) EquatorCrossingLongitude, EquatorCrossingDate, EquatorCrossingTime

The equator crossing longitude, date and time (UT) are stored. However, if the satellite does not pass through an equator (like near real time product or short product by the lack of observation data), it is filled with "*".

(16) OrbitDirection

The direction (ASCENDING/DESCENDING) of the product is stored.

(17) EphemerisGranulePointer

The orbit data file names used for processing are stored.

(18) EphemerisType

The type of orbit information used for processing is stored. The abbreviation is shown below.

ELMP	The predictive ephemeris (when using GBAD)
ELMD	The definitive ephemeris (when using DEFEPHEM)

(19) PlatformShortName, SensorShortName

The abbreviated name of the satellite (platform) and the observation sensor is stored.

(20) NumberofScans

The number of scans of the observation data in the product is stored. It contains the additional scans of each 10 scans at start/end part as shown in Figure 1.4.2-1.

(21) NumberofMissingScans

The number of missing scans in the product is stored. Though one scan of AMSR-E consists of 16 packets, it counts one missing scan even if one packet is lost. (The missing packet position is stored in DataQuality shown in 2.3)

(22) ECSDataModel

The fixed value "B.0" is stored as the version of metadata model defined in ECS.

(23) DiscontinuityVirtualChannelCounter

It represents the status of continuous receiving of inputted Science data's packets, and stored value is shown below. In case of Science RBD, AMSR-E processing software copies the status flag of ESH (EDOS Service Header in the science RBD file). And in case of PDS, AMSR-E processing software sets the result of checking data.

Continuation	Continuation	(RBD / PDS)
Discontinuation	Discontinuation (Anomaly)	(RBD only)
DEAD Encounter	Encountered DEAD	(RBD/PDS)

RBD: It indicates Rate Buffered Data, and 20 bytes data (it is called ESH: EDOS Service Header) are inserted to every packets. RBD is acquired from NASA to EOC online.

PDS: It indicates Production Data Sets, and ESH are removed. PDS stores about 2 hour data and they are delivered from NASA to EOC via media on demand.

(24) QALocationPacketDiscontinuity

The packet continuity state of the product is stored. The continuity state of the packet is the value shown in the following.

(25) NumberofPackets

The total packet number of the product is stored. Since one scans are 16 packets, the relation between NumberofPackets and NumberofScan are shown in below.

$$\text{NumberofPackets} = \text{NumberofScan} * 16 \text{ packets}$$

(26) NumberofInputFiles

The number of science data files used for processing is stored. It is corresponding to the number of files stored in InputPointer.

(27) NumberofMissingPackets, NumberofGoodPackets

The number of missing packets and the number of normal packets in the product are stored. The relation between the total packets number and these attributes are as follows.

$$\text{NumberofPackets} = \text{NumberofMissingPackets} + \text{NumberofGoodPackets}$$

(28) ReceivingCondition

The blank is stored.

(29) EphemerisQA

The quality judged by the checking orbit data and attitude data is stored. The quality inspection result becomes NG, when either number of following limit check errors exceeds 20 % of the data. And it becomes OK in other cases.

Check the orbit data:

$$\text{LowerLimit} \leq R \leq \text{UpperLimit}$$

$$R = \sqrt{X^2 + Y^2 + Z^2}$$

Check the attitude data:

$$\text{LowerLimit} \leq \text{Roll, Pitch, Yaw} \leq \text{UpperLimit}$$

(30) AutomaticQAFlag

The automatic inspection result of data processing is stored. The items of the automatic inspections are shown in the attribute "AutomaticQAFlagExplanation". And the following value is stored.

PASS	Good	(When all check items are in the state of 'OK'.)
FAIL	Poor	(When some check items are in the state of 'NG'.)
FAIL	NG	(When all check items are in the state of 'NG'.)

(31) AutomaticQAFlagExplanation

The contents of automatic inspection and its thresholds are stored.

1.MissingDataQA:Less than 20 is available->OK, 2.AntennaRotationQA:Less than 20 is available->OK, 3.HotCalibrationSourceQA:Less than 20 is available->OK, 4.AttitudeDataQA:Less than 20 is available->OK, 5.EphemerisDataQA:Less than 20 is available->OK, 6.QualityofGeometricInformationQA:Less than 0 is available->OK, 7.BrightnessTemperatureQA:Less than 20 is available->OK, All items are OK, 'PASS' is employed

(32) ScienceQualityFlag, ScienceQualityFlagExplanation

The blank is stored for level 1.

(33) QAPercentMissingData

The percentage of the missing data in a product is stored.

* Missing observation data is set to '-9999' in SDS.

(34) QAPercentOutofBoundsData

The percentage of the limit error to all data is stored. It is judged as error when the antenna temperature and brightness temperature exceed the limit value.

* In the level 1A product, since brightness temperature conversion is not executed, it is filled with 0.

* In the level 1B product, abnormal brightness temperature is stored as negative value.

(35) QAPercentParityErrorData

The percentage of a parity error data to all data is stored. It is judged as error whether the parity error flag exists in the raw observation data (Figure 2.1-2.).

* When the observation data has a parity error, -32768 is stored in the level 1B product.

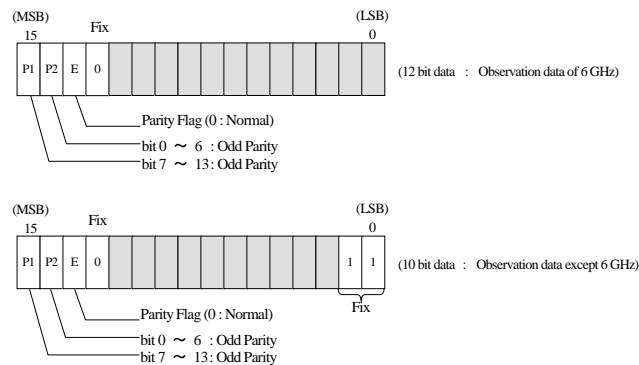


Figure 2.1-2 Bit formats of observation data (raw data)

(36) ProcessingQADescription

The error message generated by data-processing software is stored. "PROC_COMP" is stored when processing software is completed normally.

(37) ProcessingQAAttribute

As the quality information of the processed data, the item name corresponding to the following standard of the anomaly judgment is stored.

<u>Items</u>	<u>Anomaly standard</u>
NumberOfMissingPackets	In case of the lack of more than one packet
EphemerisQA	In case of NG
QAPercentMissingData	In case of more than 1 %
QAPercentOutofBoundsData	In case of more than 1 %
QAPercentParityErrorData	In case of more than 1 %

2.2 Product Metadata

(1) SatelliteOrbit, Attitude, OrbitSemiMajorAxis, OrbitEccentricity, OrbitArgumentPerigee, OrbitInclination, OrbitPeriod, RevisitTime

The characteristics of Aqua are stored.

SatelliteOrbit	Sun-synchronous_sub-recurrent
Altitude	707.9 km
OrbitSemiMajorAxis	7085.858 km
OrbitEccentricity	0.00095
OrbitArgumentPerigee	106.480 degrees
OrbitInclination	98.15 degrees
OrbitPeriod	98 minutes
RevisitTime	16 days

(2) AMSRChannel, AMSRBandWidth, AMSRBeamWidth, OffNadir, SpatialResolution(AzXEI)

The characteristics of AMSR-E are stored.

AMSRChannel	Observing channels of AMSR-E are set.
AMSRBandWidth	Bandwidth for each frequency is set.
AMSRBeamWidth	Beam width for each frequency is set.
OffNadir	The off nadir angle of 89 GHz A-horn and 89 GHz B-horn are set.
SpatialResolution(AzXEI)	6G-43.2kmX75.4km ,10G-29.4kmX51.4km ,18G-15.7kmX27.4km , 23G-18.1kmX31.5km ,36G-8.2kmX14.4km ,50.3G- ,52G- , 89GA-3.7kmX6.5km ,89GB-3.5kmX5.9km
ScanningPeriod	Scanning period is set. 1.5 sec
SwathWidth	Swath width is set. 1450 km
DynamicRange	Dynamic range is set. 2.7 – 340 K

(3) DataFromatType, HDFFormatVersion

The file format information of a product is stored.

DataFromatType	NCSA-HDF	AMSR-E Product Format Type
HDFFormatVersion	Ver4.2r4	Version number of HDF Format

(4) EllipsoidName, SemiMajorAxisofEarth, FlatteningRatioofEarth

The earth model used in AMSR-E data processing software is stored.

EllipsoidName	The earth ellipsoid name:	WGS84:
SemiMajorAxisofEarth	The semi major axis of the earth	6378.1km
FlatteningRatioofEarth	The flattening ratio of the earth	0.00335

(5) SensorAlignment

Alignment values between Aqua body coordinate system and the AMSR-E coordinate system are stored.

(6) Thermistor

The engineering conversion coefficients for the thermistor and those applicable ranges are stored.

Thermistor Count	Range Wx	Thermistor conversion table applied range.
Thermistor Conversion	Table Wa	Thermistor conversion coefficients Wa.
Thermistor Conversion	Table Wb	Thermistor conversion coefficients Wb.
Thermistor Conversion	Table Wc	Thermistor conversion coefficients Wc.
Thermistor Conversion	Table Wd	Thermistor conversion coefficients Wd.

The formula of conversion from count to engineering value is:

$$EngineeringValue[K] = Wa_i \cdot C^2 + Wb_i \cdot C + Wc_i + Wd_i + 273.15$$

C : Count

i : $Wx_{i-1} \leq C \leq Wx_i$

(7) Platinum#1

The engineering conversion coefficients for the platinum sensor #1 and those applicable ranges are stored.

Platinum#1 Count	Range Wx	Platinum #1 Table applied range.
Platinum#1 Conversion	Table Wa	Platinum #1 conversion coefficients Wa.
Platinum#1 Conversion	Table Wb	Platinum #1 conversion coefficients Wb.
Platinum#1 Conversion	Table Wc	Platinum #1 conversion coefficients Wc.
Platinum#1 Conversion	Table Wd	Platinum #1 conversion coefficients Wd.

The conversion formula is the same as that for Thermistor.

(8) Platinum#2

The engineering conversion coefficients for the platinum sensor #2 and those applicable ranges are stored.

Platinum#2 Count	Range Wx	Platinum #2 Table applied range.
Platinum#2 Conversion	Table Wa	Platinum #2 conversion coefficients Wa.
Platinum#2 Conversion	Table Wb	Platinum #2 conversion coefficients Wb.
Platinum#2 Conversion	Table Wc	Platinum #2 conversion coefficients Wc.
Platinum#2 Conversion	Table Wd	Platinum #2 conversion coefficients Wd.

The conversion formula is the same as that for Thermistor.

(9) Platinum#3

The engineering conversion coefficients for the platinum sensor #3 and those applicable ranges are stored.

Platinum#3 Count	Range Wx	Platinum #3 Table applied range.
Platinum#3 Conversion	Table Wa	Platinum #3 conversion coefficients Wa
Platinum#3 Conversion	Table Wb	Platinum #3 conversion coefficients Wb
Platinum#3 Conversion	Table Wc	Platinum #3 conversion coefficients Wc
Platinum#3 Conversion	Table Wd	Platinum #3 conversion coefficients Wd

The conversion formula is the same as that for Thermistor.

(10) CoefficientA (CoefficientAvv, CoefficientAhv, CoefficientAov, CoefficientAhh, CoefficientAvh, CoefficientAoh)

The conversion coefficients in each frequency are stored for the brightness temperature. The coefficients are used for changing the antenna temperature (Ta) of observation data into the brightness temperature (Tb). Brightness temperature is computed by the following formula, which is different to polarizations.

$$Tbv = Avv Tav + Ahv Tah + 2.7 Aov$$

Tbv: The observation brightness temperature of the vertical polarization.

Tav: The antenna temperature of the vertical polarization.

Tah: The antenna temperature of the horizontal polarization.

Avv: The conversion coefficient of the vertical co-polarization.

Ahv: The conversion coefficient of the vertical cross-polarization.

Aov: The coefficient of the deep space's brightness temperature of the vertical polarization.

$$Tbh = Ahh Tah + Avh Tav + 2.7 Aoh$$

Tbh: The observation brightness temperature of the horizontal polarization.

Tav: The antenna temperature of the vertical polarization.

Tah: The antenna temperature of the horizontal polarization.

Avh: The conversion coefficient of the horizontal cross-polarization.

Ahh: The conversion coefficient of the horizontal co-polarization.

Aoh: The coefficient of the deep space's brightness temperature of the horizontal polarization.

(11) CSMTemperature

The antenna temperature of the deep space is stored for each frequency. The stored value is used as a conversion factor in data-processing software.

(12) CoRegistrationParameterA1, CoRegistrationParameterA2

The co-registration parameters A1 and A2 are stored for each frequency. The co-registration parameters are used for calculating the position (latitude and longitude) of the observing point for each frequency except 89 GHz. The latitude and longitude of each frequency (except 89 GHz) are calculated by the method shown below. The observation position P_t [m] of the m -th point in each scan is calculated by observation position of odd-numbered points (origin 1) P [2m-1] of 89 GHz A-horn and observation position of even-numbered points P [2m]. The elements of vectors of P_t [m], ex , ey , and ez , are shown in the following formula.

$$ex = \vec{p}_1$$

$$ez = \frac{\vec{P}_1 \times \vec{P}_2}{|\vec{P}_1 \times \vec{P}_2|}$$

$$ey = ez \times ex$$

$$\cos \theta = \vec{P}_1 \bullet \vec{P}_2$$

\vec{P}_1 : The vector of observation point $P[2m-1]$

\vec{P}_2 : The vector of observation point $P[2m]$

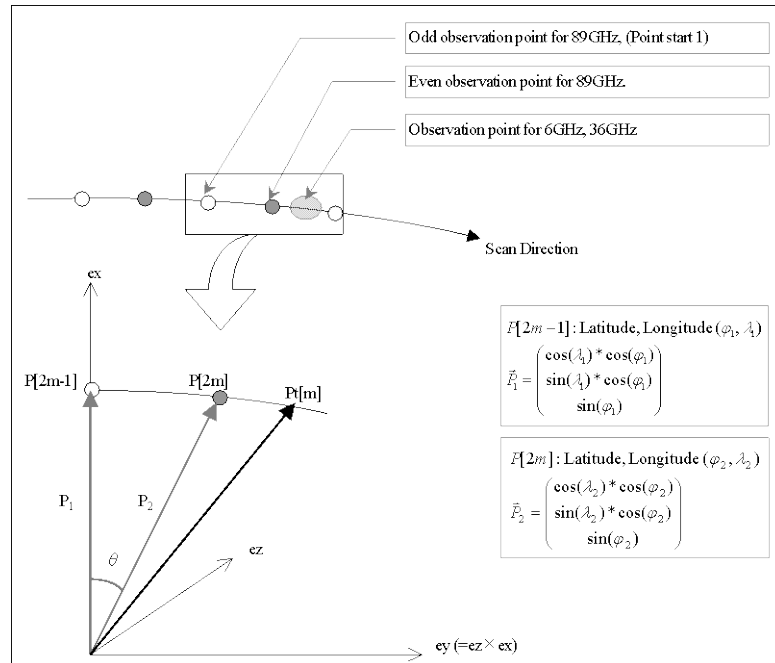


Figure 2.2-1 the definition of the vector ex , ey , ez .

The ex is the vector of the odd-numbered observation point of 89 GHz A-horn from the earth center, and the ey is the rectangular vector to the ex in a plane including the next observation point of 89GHz A-horn. And, the ez is a rectangular vector to ex and ey . Here, A1 is defined as the co-registration parameter of the ex - ey plane, and A2 is defined as the co-registration parameter of the ex - ez plane, then the observation position of frequency except 89 GHz is calculated by the following formula.

$$P_t[m] = \cos(A2 \cdot \theta) \cdot (\cos(A1 \cdot \theta) \cdot ex + \sin(A1 \cdot \theta) \cdot ey) + \sin(A2 \cdot \theta) \cdot ez$$

(13) CalibrationCurveCoefficient#1, CalibrationCurveCoefficient#2, CalibrationCurveCoefficient#3, CalibrationCurveCoefficient#4, CalibrationCurveCoefficient#5

The coefficients of radiometric correction are stored for nonlinear calibration of the antenna temperature in each frequency. Nonlinear calibration is performed by the following formula.

CalibrationCurveCoefficient#1	C0	The coefficient for 0-th order
CalibrationCurveCoefficient#2	C1	The coefficient for 1st order
CalibrationCurveCoefficient#3	C2	The coefficient for 2nd order
CalibrationCurveCoefficient#4	C3	The coefficient for 3rd order
CalibrationCurveCoefficient#5	C4	The coefficient for 4-th order

$$Ta = C0 + C1 Ta' + C2 (Ta')^2 + C3 (Ta')^3 + C4 (Ta')^4$$

Ta : Nonlinear calibrated antenna temperature [K]

Ta' : The antenna temperature calculated with antenna temperature coefficients [K]

*The calculation of antenna temperature with antenna temperature coefficients is shown at Antenna_Temperature_Coef (Of+Sl).

(14) CalibrationMethod

The following every adopted calibration methods are stored. When no methods are adopted, the blank is stored.

Target Data	Calibration Method Name	Explanation
Observation data of high temperature calibrator (HTS)	HTUCoefficients	HTS calibration method is chosen one of three.
	ElectromagneticAnalysis	
	RxTemperatureReferenced	
Observation data of low temperature calibrator (CSM)	Spillover	This is used for removing the ground radiation effect on CSM at 6 GHz.
	CSMInterpolation	This is used for removing the moon light effect, the interference of radio frequency, and the stray light from the sun on CSM.
Geometric information	Absolute89GPositioning	This is used for geometric correction of 89 GHz.
Antenna temperature	NonlinearityCorrection	This is used for the nonlinear calibration of the antenna temperature.

(15) HTSCorrectionParameterVersion

The version of the parameter file used in order to calibrate the temperature of HTS is stored as 4 characters (XXXX).

The kinds of calibration are shown in CalibrationMethod. When this calibration is not performed, it is filled with "*".

(16) SpillOverParameterVersion

The version of the parameter file used in order to calibrate the ground radiation mixed into the 6 GHz CSM data is stored as 4 characters (XXXX). When this calibration is not performed, it is filled with "*".

(17) CSMInterpolationParameterVersion

The version of the parameter file used in order to calibrate the following items for CSM data is stored as 4 characters (XXXX). When this calibration is not performed, it is filled with "*".

(18) Absolute89GpositioningParameterVersion

The version of the parameter file used in order to correct the 89 GHz position information is stored as 4 characters (XXXX). When the position information is not corrected, it is filled with "*".

2.3 Data Items

(1) Scan Time

The observation start time of 89GHz A-horn in every scan is stored. This time is a total second (TAI) from 0:00 (UT) on January 1st, 1993.

* Since the observation width differs from level 1A to level 1B, the start scan time is also different.

(2) Position in Orbit

The position in a satellite orbit is stored. The position of a satellite consists of an orbit number and a position from the ascending node. This is expressed in the following formula.

$$\text{Position_in_Orbit} = \text{Orbit Number} + \text{Satellite Position}$$

$$\text{Satellite Position} = (\text{Scan_Time} - \text{Ascending Node Passage Time}) / (98.9 * 60)$$

(3) Navigation Data

The Cartesian orbit information on a satellite is stored in the inertial coordinate system. Orbit information is the position and velocity of a satellite corresponding to the observation start time (Scan_Time) of each scan.

(4) Attitude Data

The attitude errors (Roll, Pitch, Yaw) are stored as attitude information corresponding to the observation start time (Scan_Time) of each scan. The coordinate system is a right-hand system that is Roll for the satellite flight direction and Yaw for the earth center direction.

(5) 6GHz-V Observation Count

The observed count value of 6 GHz vertical polarization is stored.

* The following value is stored for the abnormal observation data. This is applied for all frequency and polarization.

-9999 Value for Lack of data

-32768 Value for Parity error.

(6) 6GHz-H Observation Count

The observed count value of 6 GHz horizontal polarization is stored.

(7) 10.65GHz-V Observation Count

The observed count value of 10.65 GHz vertical polarization is stored.

(8) 10.65GHz-H Observation Count

The observed count value of 10.65 GHz horizontal polarization is stored.

(9) 18.7GHz-V Observation Count

The observed count value of 18.7 GHz vertical polarization is stored.

(10) 18.7GHz-H Observation Count

The observed count value of 18.7 GHz horizontal polarization is stored.

(11) 23.8GHz-V Observation Count

The observed count value of 23.8 GHz vertical polarization is stored.

(12) 23.8GHz-H Observation Count

The observed count value of 23.8 GHz horizontal polarization is stored.

(13) 36.5GHz-V Observation Count

The observed count value of 36.5 GHz vertical polarization is stored.

(14) 36.5GHz-H Observation Count

The observed count value of 36.5 GHz horizontal polarization is stored.

(15) 50.3GHz-V Observation Count

Since 50.3 GHz is not observed by AMSR-E, 0 fills it.

(16) 52.8GHz-V Observation Count

Since 52.8 GHz is not observed by AMSR-E, 0 fills it.

(17) 89.0GHz-V-A Observation Count

The observed count value of 89 GHz A-horn's vertical polarization is stored.

(18) 89.0GHz-H-A Observation Count

The observed count value of 89 GHz A-horn's horizontal polarization is stored.

(19) 89.0GHz-V-B Observation Count

The observed count value of 89 GHz B-horn's vertical polarization is stored.

(20) 89.0GHz-H-B Observation Count

The observed count value of 89 GHz B-horn's horizontal polarization is stored.

(21) Hot-Load Count 6 to 52

The observed count value of HTS and polarization is stored for each frequency except 89 GHz. The number of observation data for 1 scan is 16 points.

* Since 50 GHz and 52 GHz are not observed by AMSR-E, they are filled with 0.

* The following value is stored for the abnormal observation data. This is applied for all frequency and polarization.

0 Value for Lack of data.

-32768 Value for Parity error.

(22) Hot-Load Count 89

The observed count value of HTS and polarization is stored for 89 GHz. The number of observation data for 1 scan is 32 points.

(23) Cold Sky Mirror Count 6 to 52

The observed count value of CSM and polarization is stored for each frequency except 89 GHz. The number of observation data for 1 scan is 16 points.

* Since 50 GHz and 52 GHz are not observed by AMSR-E, they are filled with 0.

* The following value is stored as the abnormal value in the low temperature calibration data of all frequency and polarization.

0 Value of Lack of data.

32767 Value of Parity error.

(24) Cold Sky Mirror Count 89

The observed count value of CSM and polarization is stored for 89 GHz. The number of observation data for 1 scan is 32 points.

(25) Antenna Temperature Coef(Of + Sl)

The antenna temperature conversion coefficients and polarization are stored for each frequency. The antenna temperature coefficients contain offset-value and slope-value, and these coefficients are used for converting the observed count value into antenna temperature.

$$Ta_{p,l} = Csl_{p,l} * Obs_{p,l} + Cof_{p,l}$$

Ta : the antenna temperature [K]

Obs : the count value of observation data

Aof : the antenna temperature conversion coefficient (offset-value)

Asl : the antenna temperature conversion coefficient (slope-value)

(26) Rx Offset/Gain Count

The gain and offset value for a receiver (RX) of each frequency are stored in every scan.

(27) Lat_of Observation Point Except 89B

The latitude of the observation point on the earth surface at 89GHz A-horn is stored.

Data Range North: 0 to 90 degrees / South: 0 to -90 degrees
Scaling Factor 0.01
Abnormal value 99.99 degrees

* The observation point (latitude, longitude) on the earth surface at 89 GHz A-horn is the standard to calculate the position of frequency except 89 GHz. The calculation method of the position of each frequency is shown in CoRegistrationParameter.

(28) Long_of Observation Point Except 89B

The longitude of the observation point on the earth surface at 89GHz A-horn is stored.

Data Range -180 to 180 degrees
Scaling Factor 0.01
Abnormal value 222.22 degrees

(29) Lat_of Observation Point for 89B

The latitude of the observation point on the earth surface at 89GHz B-horn is stored. The data range, scaling factor, and abnormal value are the same as 89 GHz A-horn.

(30) Long_of Observation Point for 89B

The longitude to the observation point on the earth surface at 89GHz B-horn is stored. The data range, scaling factor, and abnormal value are the same as 89 GHz A-horn.

(31) Sun_Azimuth

The sun azimuth angle on odd observation points (origin 1) of 89 GHz A-horn is stored. (See Figure 2.3-1.)

Data Range -180 degree to 180 degrees
Scaling Factor 0.1
Abnormal Value -32768 The case of observation point error.
The case of setting value is less than -180 degrees.
32767 The case of setting value is more than 180 degrees.

(32) Sun Elevation

The sun elevation angle on odd observation points (origin 1) of 89 GHz A-horn is stored. (See Figure 2.3-1.)

Data Range	-180 degree to 180 degrees
Scaling Factor	0.1
Abnormal Value	-32768 The case of observation point error.
	32767 The case of setting value is below -180 degrees.
	32767 The case of setting value is over 180 degrees.

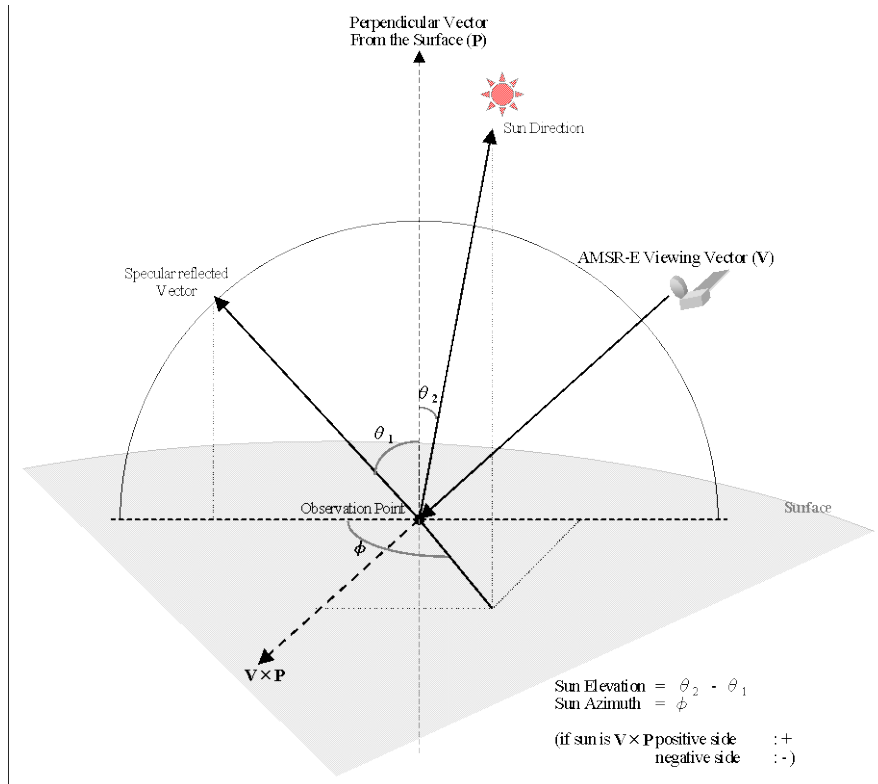


Figure 2.3-1 The Definition of Sun Elevation, Azimuth

(33) Earth Incidence

The earth incident angle on odd observation points (origin 1) of 89 GHz A-horn is stored. (See Figure 2.3-2.) It is the angle between the perpendicular vector of the earth surface and the viewing vector of AMSR-E defined by Figure 2.3-2.

Data Range	52.4 degrees to 57.54 degrees	
Scaling factor	0.02	
Offset Value	55.0 degrees	
Abnormal Value	-128	In case of observation point error.
		In case of setting value is less than -127.
	127	In case of the sun elevation exceeds 180 degrees.

(34) Earth Azimuth

The earth azimuth angle on odd observation points (origin 1) of 89 GHz A-horn is stored. (See Figure 2.3-2.) It is the angle between the north oriented vector on the observation point and the inversed projected viewing vector defined by Figure 2.3-2.

Data Range	-180.0 degrees to 180.0 degrees	
Scaling Factor	0.01	
Abnormal Value	99999	In case of observation point error.

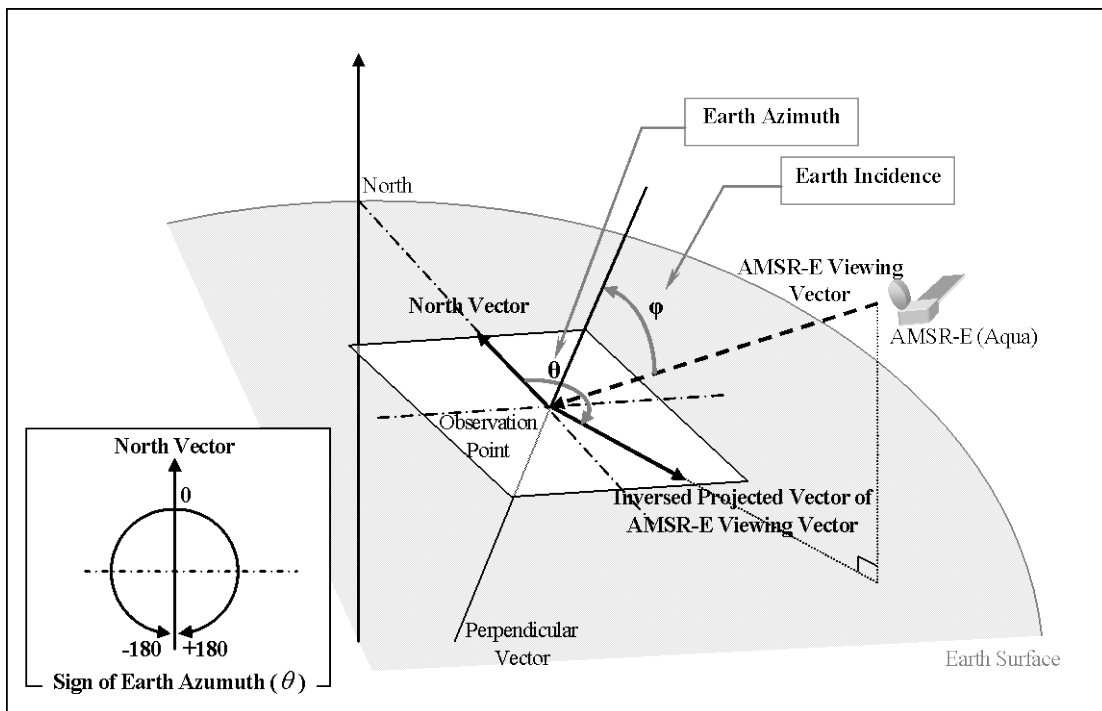


Figure 2.3-2 The definition of Earth Azimuth and Incidence

(35) Land/Ocean Flag 6 10 18 23 36 50 89A

The land coverage percentage of the observation footprint of AMSR-E is stored for each frequency.

- * The 89 GHz land/ocean flag is stored for only odd points of A-horn (origin 1).
- * Since 50 GHz and 52-GHz are not observed by AMSR-E, they are filled with 0.
- * The observation point of each frequency except 89 GHz is equivalent to the position that corrected by co-registration parameters. The calculation method is shown in the item "CoRegistrationParameter".

(36) Observation Supplement

Observation supplement raw data such as a H/W state is stored for each scan. (See Figure 1.2-11.)

(37) SPC Temperature Count

The temperature of SPC (Signal Processor Control unit) in each scan is stored with the value of 10 bits and 12 bits of raw data acquired from the satellite. (See Figure 2.3-3 and Figure 1.2-12.)

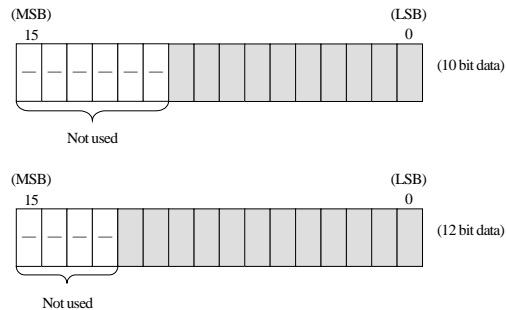


Figure 2.3-3 The Data Structure of SPC Temperature Count

(38) SPS Temperature Count

The temperature of SPS (Signal Processor Sensor unit) in each scan is stored with the value of 10 bits and 12 bits of raw data acquired from the satellite. (See Figure 2.3-4 and Figure 1.2-13.)

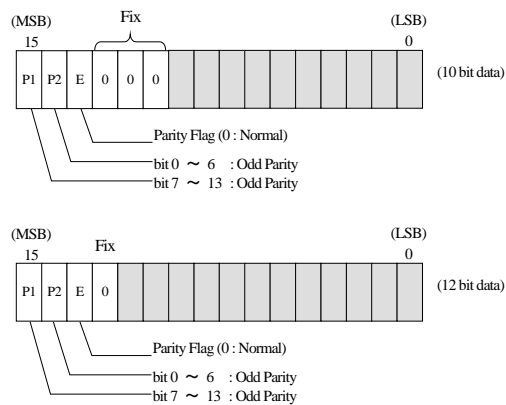


Figure 2.3-4 The Data Structure of SPS Temperature Count

(39) Data Quality

The quality information and supplementary information are stored. These correspond to observation data and calculation result in each scan. The stored information is shown below.

- 1) The Sun Direction Angle from CSM. (Direction of Sun) [type: float]

The angle [degree] between the viewing vector of CSM and the direction of the sun is stored. (See Figure 2.3-5)

- 2) The Moon Direction Angle from CSM. (Direction of Moon) [type: float]

The angle [degree] between the viewing vector of CSM and the direction of the moon is stored. (See Figure 2.3-5)

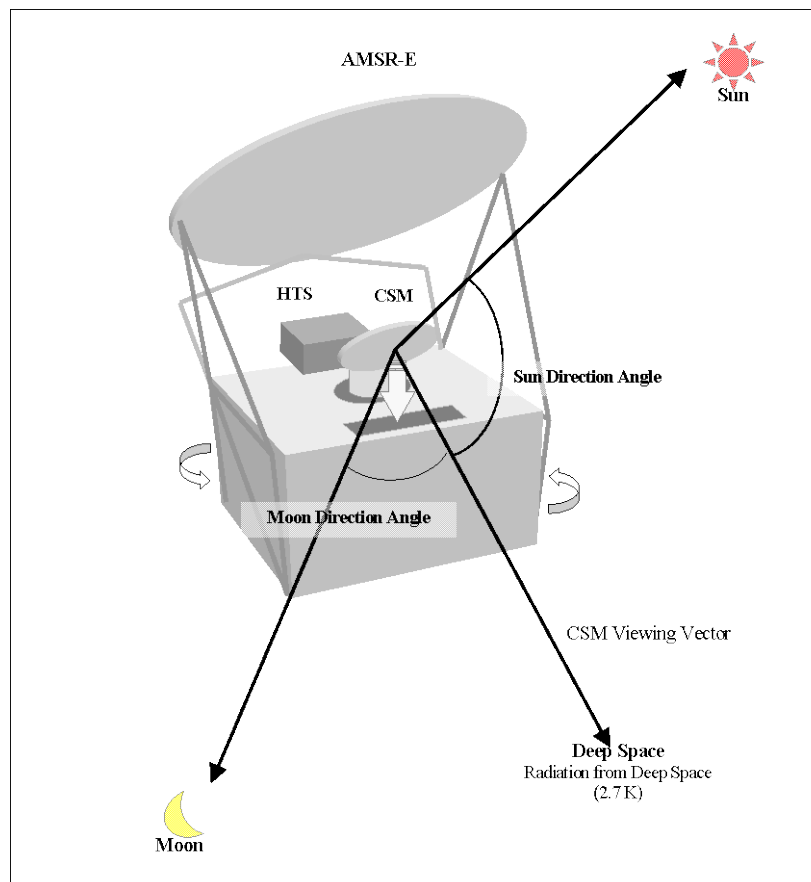


Figure 2.3-5 The Definition of the Moon Direction Angle and the Sun Direction Angle

3) The quality of a scan. (Quality Information of a Scan)

Flag information for each bit of 32-bits is stored. This flag is set to 0 for normal case, and 1 for error case. The setting of each bit is shown sequentially from LSB (Least Significant Bit).

a) The result of GPSR counts check. (1 bit)

When the difference of the GPSR counts in about 1 scan is outside of the range 1.5 ± 1.0 (sec) or -6.5 ± 1.0 (sec) in engineering value, an error value (1) is set.

b) The result of HTS temperature check. (1 bit)

When the difference of the HTS temperature is more than 0.5 K in engineering value, an error value (1) is set.

c) The condition for each packet. (16 bits)

When there are lacks of packets or the code of "DEAD", which shows the hexadecimal code for the lack packet filled by NASA EDOS, an error value (1) is set. The quality for each 16 packets is set from the 3rd bit LSB to MSB (Most Significant Bit).

4) Tacho Pulse Count (Tacho Pulse Count) [type: float]

The angle [degree] of averaged tacho pulse counts is stored.

5) Quality of the calibration data (Calibration Data Quality)

As quality of the calibration source, the statistics of the CSM and HTS are stored in order of, 6G-V, 6G-H, 10G-V, 10G-H, 18G-V, 18G-H, 23G-V, 23G-H, 36G-V, 36G-H, 50G-V, 52G-V, 89GA-V, 89GA-H, 89GB-V, and 89GB-H. Detailed statistical information is shown below.

* Since 50 G-V and 52-G-V are not observed by AMSR-E, they are filled with 0.

a) The average value of CSM count. (4 byte s) [type: float]

b) The average value of HTS count. (4 byte s) [type: float]

c) The standard deviation of CSM count. (4 byte s) [type: float]

d) The standard deviation of HTS count. (4 byte s) [type: float]

6) SPC, SPS Error Flag(SPC/SPS Error Flag) [type: bit]

The check result of the error flag for SPC and SPS that affects observation data is stored. The stored value is shown below.

0: Normal case

1: SPC anomaly case

2: SPS anomaly case

3: Both SPC and SPS anomaly case

7) HTS temperature (HTS Temperature) [type: float]

The HTS temperature ([K]) is stored for each frequency. The stored temperature is the value used for calculation of the coefficients for the antenna temperature conversion. The storing order of each frequency is the same as above 5).

8) Parity Error Summary (Parity Error Summary)

The sum of the following parity error is stored for each scan.

a) The sum of parity error for RX Offset/Gain of all frequency. [type: float]

b) The sum of parity error for CSM count for each frequency. [type: float]

(Storing order is the same as above 5).)

c) The sum of parity error for HTS count for each frequency. [type: float]

(Storing order is the same as above 5).)

9) Spare

It is filled with 0.

(40) Interpolation Flag 6 to 52

The interpolation flag for CSM data is stored for each frequency except 89GHz. (Shown in Figure 2.3-6.) Each flag is corresponded to the correction items shown below.

- Correction for the contamination of the moon reflection
- Correction for the stray light from the sun
- Correction for the radio frequency interference on CSM data

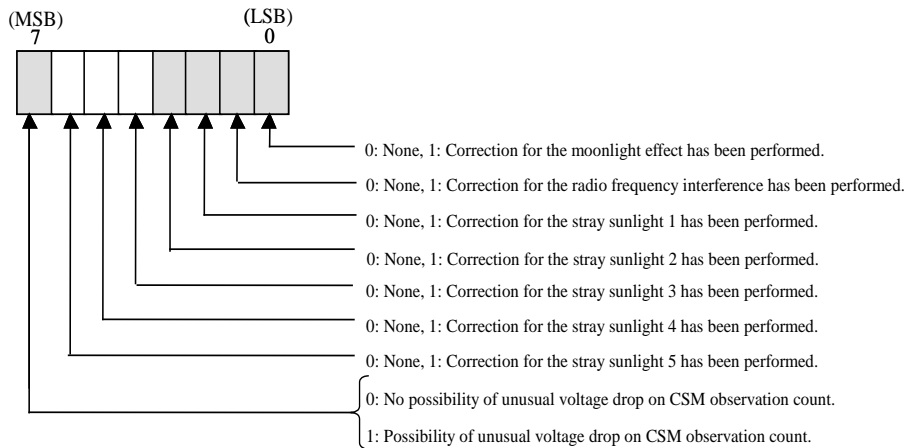


Figure 2.3-6 The Format of The Interpolation Flag

(41) Interpolation Flag 89

The interpolation flag for CSM data is stored for 89GHz. (Shown in Figure 2.3-6.)

(42) Spill Over

The observation voltage of 6 GHz before 200 scans is stored from the head scan of the product. (And the unit is mV.)

This information is used for calibrating the ground radiation on CSM.

- * For Near Real Time processing, they are filled with 0.
- * The abnormal values are shown in below.

-999.0	In case of error on a voltage conversion etc.
0.0	In case of the lack of observation data, parity error, RxOffset/Gain error .

AMSR-E Level 1B Product Format Description

Contents

1.	Explanation of the Product	1
1.1.	Product Structure	2
1.2.	File Structure.....	3
1.3.	Data Size of one Level 1B Product.....	15
2.	Data Explanation	16
2.1.	Core Metadata.....	16
2.2.	Product Metadata.....	17
2.3.	Data Items	18

1. Explanation of the Product

The Level 1B product stores the value of observed microwave radiation from the earth surface and its geometric information as HDF. The features of level 1B product are shown below.

- Range of data

The level 1B product is extracted to the range of a half orbit between the South Pole and North Pole from level 0 data (Science and GBAD data).

- Observation width

The range of the observation width is ± 61 degrees centered at the flight direction. (See Figure 1-1.)

196 data points are observed for each frequency below 89GHz and 392 for 89GHz.

- Main storing data

- Scan time
- Brightness temperature of the earth surface observation data
(With radiometric conversion and correction)
- Radiometric conversion coefficients
- Temperature of the high temperature calibrator and the low temperature calibrator
- Geometric information (position, observation incidence angle, sun azimuth angle, etc.)
- Quality information
- Others (The information of the satellite, sensor, and product etc.)

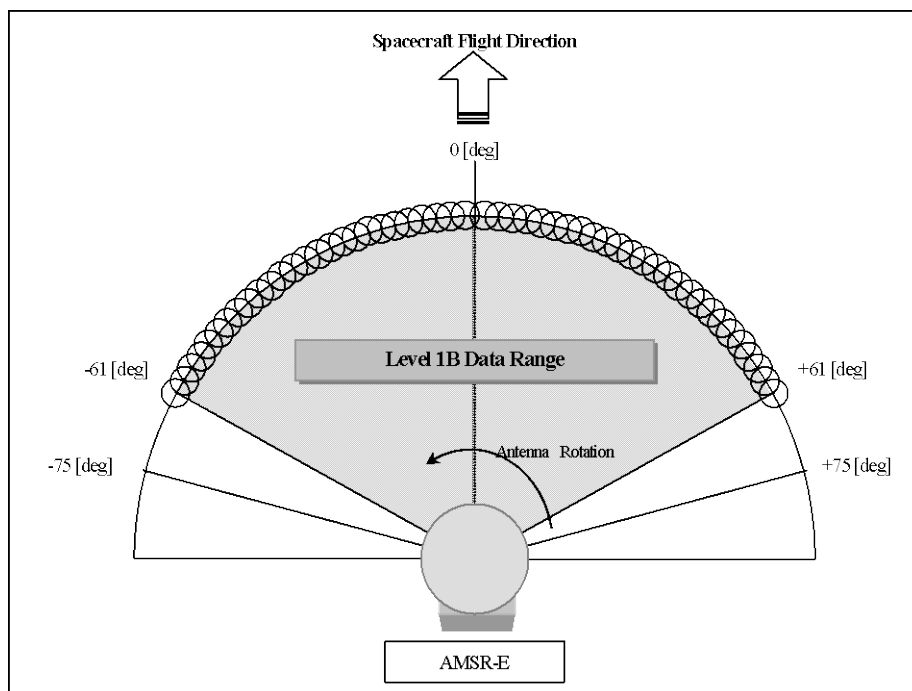


Figure 1-1 The Data Range of One Scan for AMSR-E (Level 1B)

1.1. Product Structure

The logical structure of level 1B product is shown in Table 1.1-1.

Table 1.1-1 Logical Structure of AMSR-E Level 1B product

Structure		HDF Data Model	Contents
Header Part	Core Meta	Global Attribute	The general information of the product is stored. It is based on the indispensable item of the attribute of NASA ECS (B. 0).
	Product Meta	Global Attribute	Main characteristics of AMSR-E and the conversion table of the engineering values, etc. are stored.
Data Part		Vdata SDS	<p>The data shown below is stored.</p> <ul style="list-style-type: none"> • Scan Time • Brightness Temperature of observation data • Calibration Data • Supplementary information (Positions, Orbits, Attitudes, Coefficients, Observation incidence angle, the sun azimuth, etc.) • Quality information

Please refer to the level 1A format description about level 1B product items except the followings, since they are the same as the format of the level 1A product.

- The observation data of earth surface is stored as brightness temperature.
- The range of the observation is ± 61 degrees to the satellite flight direction.

1.2. File Structure

The file structure of AMSR-E level 1B product is shown in Figure 1.2-1. The explanation for the core metadata of the header part is shown in Table 1.2-1, and the product metadata is shown in Table 1.2-2. Moreover, the explanation for each item of the data part shows the data size and the scale factor in Table 1.2-3, and the data structure of brightness temperature different from level 1A in Figure 1.2-2.


[Cautions]

In Table 1.2-1, Table 1.2-2, and Table 1.2-3, un-hatched part shows the peculiar information of the level 1B product. The explanation subsequent to Chapter 2 shows only peculiar information of the level 1B product, and the common items (the hatched) with level 1A product are explained in the level 1A product format description.

Level 1B Product

Core Metadata Product Metadata

(Header)

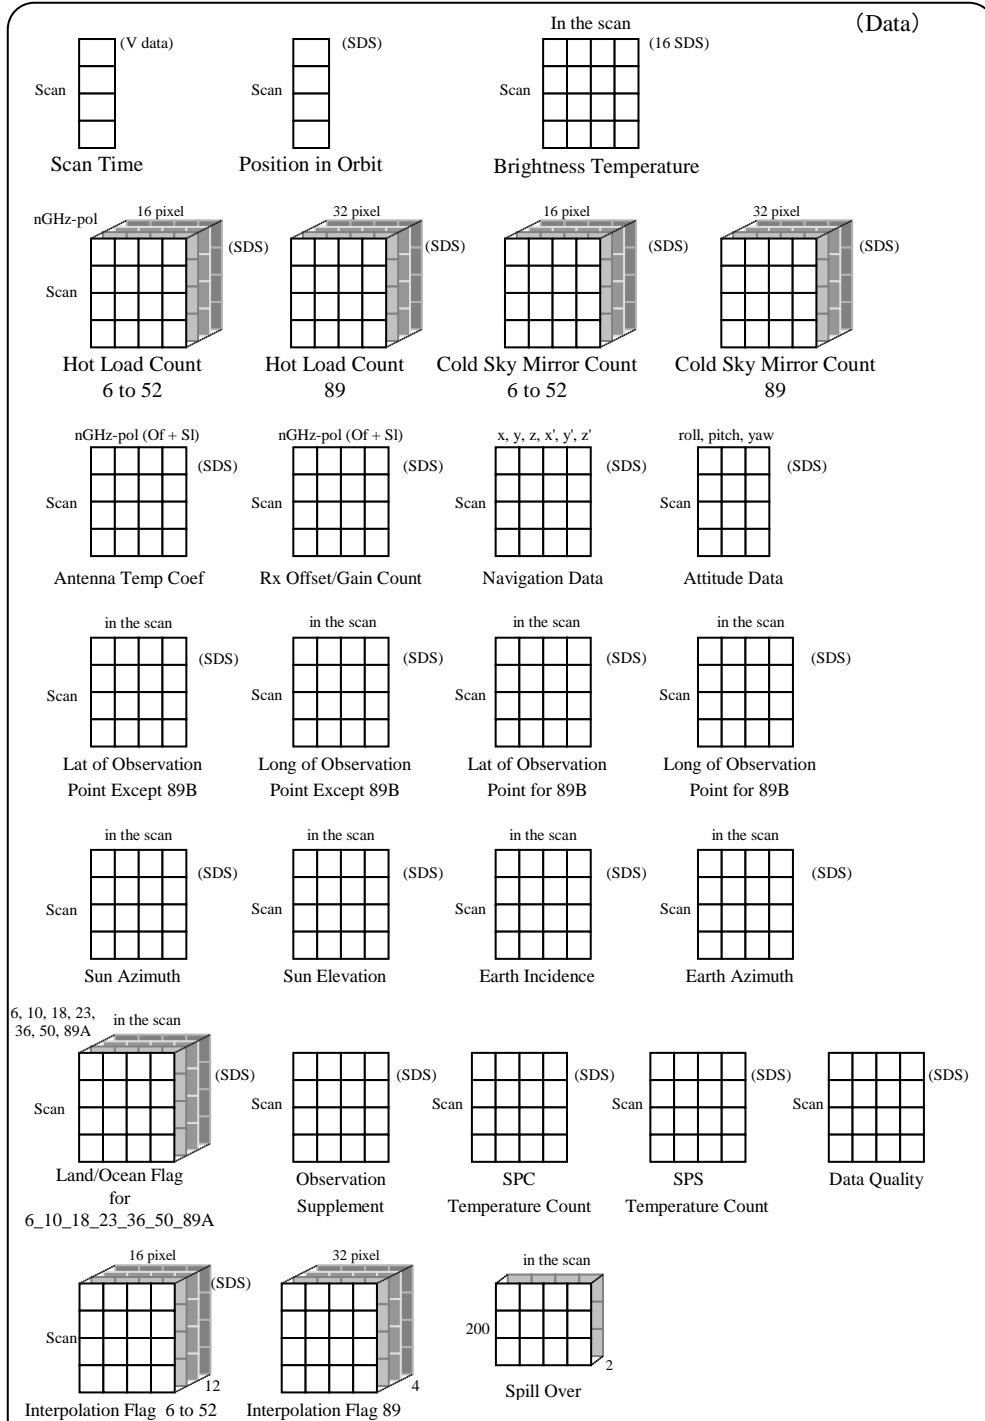

Data Structure

Figure 1.2-1 The Data Structure

Table 1.2-1 Core Meta Items (1/3)

Items (Attribute Name)	Explanation	Concrete Values or Examples	Attention	Fix/ Example
ShortName	The abbreviated name of the product	AMSREL1B		Fix
VersionID	The version ID of the product	RELEASE3		Example
SizeMBECSDataGranule	Data size of the product (Mbytes)	36.6		Example
LocalGranuleID	Product management number	P1AME020729210MD_P01B0000000		Example
ProcessingLevelID	ID of processing level	L1B		Fix
ReprocessingActual	Re-processing date (UTC)	Blank or 2002-08-10	Date only set for Re-processing (0-Fill for blank)	Example
ProductionDateTime	Product creation date (UTC)	2002-07-29T07:14:29.000Z	0-Fill for blank	Example
RangeBeginningTime	Start time of observation data (UTC)	02:57:17.53Z	0-Fill for blank	Example
RangeBeginningDate	Start date of observation data	2002-07-29	0-Fill for blank	Example
RangeEndingTime	End time of observation data (UTC)	03:47:06.81Z	0-Fill for blank	Example
RangeEndingDate	End date of observation data	2002-07-29	0-Fill for blank	Example
GringPointLatitude	Latitude of data effective range	83.71,73.23,34.10,-25.31,-84.97,-73.60,-23.13,36.52		Example
GringPointLongitude	Longitude of data effective range	152.28,91.82,-10.34,-24.72,-39.30,-105.73,-40.70,-27.99		Example
PGEName	Data processing software name	L1B_Process_Software		Fix
PGEVersion	Data processing software version	333*33****33330333		Example
InputPointer	Input file name	R1540402SGS0221003170100.RBD, R1540402SGS0221005320100.RBD		Example
ProcessingCenter	Data processing center	JAXA EOC		Fix
ContactOrganizationName	Contact organization name	JAXA,1401,Ohashi,Hatoyama-machi,Hiki-gun,Saitama ,350-0393,JAPAN,+81-49-298-1307,orderdesk@eoc.ja xa.jp		Fix
StartOrbitNumber	Start orbit number	1251		Example
StopOrbitNumber	End orbit number	1251		Example
EquatorCrossingLongitude	Longitude at the time of equatorial passage	-28.80		Example
EquatorCrossingDate	Date of equatorial passage	2002-07-29	0-Fill for blank	Example
EquatorCrossingTime	Time of equatorial passage	03:24:14.41Z	0-Fill for blank	Example

* The un-hatched indicates the peculiar information of the level 1B product. (Refer to the level 1A product description for the hatched.)

Table 1.2-1 Core Meta Items (2/3)

Items (Attribute Name)	Explanation	Concrete Values or Examples	Attention	Fix/ Example
OrbitDirection	Orbit direction	DESCENDING		Example
EphemerisGranulePointer	Orbital data file name	R1540957SGS0221003170100.RBD		Example
EphemerisType	Type of orbital data	ELMP		Example
PlatformShortName	Abbreviated name of Platform	EOS-PM1		Fix
SensorShortName	Sensor name	AMSR-E		Fix
NumberOfScans	Number of scans	1994		Example
NumberOfMissingScans	Number of missing packets	1		Example
ECSDataModel	Meta data model name	B.0		Fix
DiscontinuityVirtualChannelCounter	Judgement of virtual channel unit counter discontinuity	DEAD Encounter		Example
QALocationPacketDiscontinuity	Judgment of packet sequence counter discontinuity	discontinuation		Example
NumberOfPackets	Number of packets	31904		Example
NumberOfInputFiles	Number of input files	2		Example
NumberOfMissingPackets	Number of missing packets	1		Example
NumberOfGoodPackets	Number of good packets	31903		Example
ReceivingCondition	Receiving condition	Blank		Fix
EphemerisQA	Ephemeris limit check	OK		Example
AutomaticQAFlag	Limit check by software	PASS		Example
AutomaticQAFlagExplanation	Explanation of limit check by software	1.MissingDataQA:Less than 20 is available->OK, 2.AntennaRotationQA:Less than 20 is available->OK, 3.HotCalibrationSourceQA:Less than 20 is available->OK, 4.AttitudeDataQA:Less than 20 is available->OK, 5.EphemerisDataQA:Less than 20 is available->OK, 6.QualityofGeometricInformationQA:Less than 0 is available->OK, 7.BrightnessTemperatureQA:Less than 20 is available->OK, All items are OK, 'PASS' is employed		Fix

* The un-hatched indicates the peculiar information of the level 1B product. (Refer to the level 1A product description for the hatched.)

Table 1.2-1 Core Meta Items (3/3)

Items (Attribute Name)	Explanation	Concrete Values or Examples	Attention	Fix/ Example
ScienceQualityFlag	The quality flag when computing the amount of physics	Blank		Fix
ScienceQualityFlagExplanation	Explanation of the quality flag when computing the amount of physics	Blank		Fix
QAPercentMissingData	Percentage of missing data	0		Example
QAPercentOutOfBoundsData	Percentage of out of bound data	0		Example
QAPercentParityErrorData	Percentage of parity error data	0		Example
ProcessingQADescription	Description of the processing error	PROC_COMP		Example
ProcessingQAAttribute	The attribute name which is abnormal by QA metadata	Blank or NumberofMissingPackets	An attribute name is set up only at the time of unusual generating.	Example

* The un-hatched indicates the peculiar information of the level 1B product. (Refer to the level 1A product description for the hatched.)

Table 1.2-2 Product Meta Items (1/4)

Items (Attribute Name)	Explanation	Concrete Values or Examples	Fix/ Example
SatelliteOrbit	The kind of Satellite's orbit	Sun-synchronous_sub-recurrent	Fix
Altitude	The altitude of Satellite	707.9km	Fix
OrbitSemiMajorAxis	The orbit semi-major axis	7085.858km	Fix
OrbitEccentricity	The orbital eccentricity	0.00095	Fix
OrbitArgumentPerigee	The orbital argument perigee	106.480deg	Fix
OrbitInclination	The orbital inclination	98.15deg	Fix
OrbitPeriod	The orbital period	98minutes	Fix
RevisitTime	Orbit recurrent days	16days	Fix
AMSRChannel	The kind of AMSR channels	6.925GHz,10.65GHz,18.7GHz,23.8GHz,36.5GHz,89.0GHz-A,89.0GHz-B	Fix
AMSRBandWidth	Band width of AMSR	6G-350MHz,10G-100MHz,18G-200MHz,23G-400MHz,36G-1000MHz,50.3G-0.52G-0.89GA-3000MHz,89GB-3000MHz	Fix
AMSRbeamWidth	Beam width of AMSR	6G-1.8deg,10G-1.2deg,18G-0.64deg,23G-0.75deg,36G-0.35deg,50.3G-0.52G-0.89GA-0.15deg,89GB-0.15deg	Fix
OffNadir	Off-nadir angle	47.0deg: 89GB, 47.5deg: others	Fix
SpatialResolution(AzXEI)	Spatial resolution	6G-43.2kmX75.4km,10G-29.4kmX51.4km,18G-15.7kmX27.4km,23G-18.1kmX31.5km,36G-8.2kmX14.4km,50.3G- ,52G- ,89GA-3.7kmX6.5km,89GB-3.5kmX5.9km	Fix
ScanningPeriod	Scanning period	1.5sec	Fix
SwathWidth	Swath width	1450km	Fix
DynamicRange	Dynamic range	2.7K-340K	Fix
DataFormatType	Data format type	NCSA-HDF	Fix
HDFFormatVersion	HDF format version	Ver4.2r4	Fix
EllipsoidName	Earth ellipse model	WGS84	Fix
SemiMajorAxisofEarth	Earth equatorial radius	6378.1km	Fix
FlatteningRatioofEarth	Flattening ratio of earth	0.00335	Fix
SensorAlignment	Sensor alignment	Rx=0.00000,Ry=0.00000,Rz=0.00000	Fix
ThermistorCountRangeWx	The effective range of a thermistor engineering value conversion factor	60,585,770,872,924,952,961,1023	Fix

* The un-hatched indicates the peculiar information of the level 1B product. (Refer to the level 1A product description for the hatched.)

Table 1.2-2 Product Meta Items (2/4)

Items (Attribute Name)	Explanation	Concrete Values or Examples	Fix/ Example
ThermistorConversionTable Wa	Thermistor conversion table: Wa	0.000000,0.000015,0.000161,0.000618,0.002331,0.011459,0.010101,0.000000	Fix
ThermistorConversionTable Wb	Thermistor conversion table: Wb	0.000000,0.056460,-0.109878,-0.819170,-3.801865,-20.783040,-18.212120,0.000000	Fix
ThermistorConversionTable Wc	Thermistor conversion table: Wc	-35.000000,-38.250000,9.220000,284.170000,1582.770000,9480.000000,8263.350000,90.000000	Fix
ThermistorConversionTable Wd	Thermistor conversion table: Wd	0.0,0.0,0.0,0.0,0.0,0.0,0.0,0.0	Fix
Platinum#1CountRangeWx	Platinum#1 count range: Wx	1168,1296,1536,1752,4095	Fix
Platinum#1ConversionTable Wa	Platinum#1 conversion table: Wa	0.0,0.0,0.0,0.0,0.0	Fix
Platinum#1ConversionTable Wb	Platinum#1 conversion table: Wb	0.000000,0.039000,0.042000,0.039000,0.042000	Fix
Platinum#1ConversionTable Wc	Platinum#1 conversion table: Wc	-35.000000,-80.625000,-84.000000,-80.000000,-84.667000	Fix
Platinum#1ConversionTable Wd	Platinum#1 conversion table: Wd	0.0,0.0,0.0,0.0,0.0	Fix
Platinum#2CountRangeWx	Platinum#2 count range: Wx	272,1536,1792,2032,2288,3248,3712,4095	Fix
Platinum#2ConversionTable Wa	Platinum#2 conversion table: Wa	0.0,0.0,0.0,0.0,0.0,0.0,0.0,0.0	Fix
Platinum#2ConversionTable Wb	Platinum#2 conversion table: Wb	0.000000,0.078300,0.078000,0.083000,0.078000,0.083000,0.085300,0.000000	Fix
Platinum#2ConversionTable Wc	Platinum#2 conversion table: Wc	-140.000000,-161.440000,-160.000000,-169.333000,-158.750000,-170.667000,-177.640000,140.000000	Fix
Platinum#2ConversionTable Wd	Platinum#2 conversion table: Wd	0.0,0.0,0.0,0.0,0.0,0.0,0.0,0.0	Fix

* The un-hatched indicates the peculiar information of the level 1B product. (Refer to the level 1A product description for the hatched.)

Table 1.2-2 Product Meta Items (3/4)

Items (Attribute Name)	Explanation	Concrete Values or Examples	Fix/ Example
Platinum#3CountRangeWx	Platinum#3 count range: Wx	349,1454,2000,2555,3059,3566,4020,4095	Fix
Platinum#3ConversionTableWa	Platinum#3 conversion table: Wa	0.0,0.0,0.0,0.0,0.0,0.0,0.0,0.0	Fix
Platinum#3ConversionTableWb	Platinum#3 conversion table: Wb	0.000000,0.009100,0.009100,0.009100,0.009900,0.009900,0.008500,0.000000	Fix
Platinum#3ConversionTableWc	Platinum#3 conversion table: Wc	0.000000,6.845000,6.803800,6.803800,4.719500,4.719500,9.835000,44.000000	Fix
Platinum#3ConversionTableWd	Platinum#3 conversion table: Wd	0.0,0.0,0.0,0.0,0.0,0.0,0.0,0.0	Fix
CoefficientAvv	Coefficient: Avv	6G-1.037,10G-1.032,18G-1.025,23G-1.032,36G-1.029,50G-0.000,52G-0.000,89GA-1.025,89GB-1.029	Fix
CoefficientAhv	Coefficient: Ahv	6G--0.003,10G--0.003,18G--0.003,23G--0.004,36G--0.004,50G-0.000,52G-0.000,89GA--0.003,89GB--0.004	Fix
CoefficientAov	Coefficient: Aov	6G--0.034,10G--0.029,18G--0.022,23G--0.028,36G--0.024,50G-0.000,52G-0.000,89GA--0.022,89GB--0.024	Fix
CoefficientAhh	Coefficient: Ahh	6G-1.037,10G-1.031,18G-1.025,23G-1.034,36G-1.029,50G-0.000,52G-0.000,89GA-1.028,89GB-1.031	Fix
CoefficientAvh	Coefficient: Avh	6G--0.003,10G--0.002,18G--0.003,23G--0.006,36G--0.004,50G-0.000,52G-0.000,89GA--0.006,89GB--0.006	Fix
CoefficientAoh	Coefficient: Aoh	6G--0.034,10G--0.029,18G--0.022,23G--0.028,36G--0.024,50G-0.000,52G-0.000,89GA--0.022,89GB--0.024	Fix
CSMTemperature	Brightness temperature of deep space	6GV-2.800, 6GH-2.800, 10GV-2.800, 10GH-2.800, 18GV-2.800, 18GH-2.800, 23GV-2.800, 23GH-2.800, 36GV-2.800, 36GH-2.800, 50GV-0.000, 52GV-0.000, 89GAV-2.800, 89GAH-2.800, 89GBV-2.800, 89GBH-2.800	Fix
CoRegistrationParametererA1	Co-registration parameter: A1	6G-0.10450, 10G--0.34960, 18G--0.32010, 23G--0.25950, 36G--0.31510, 50G-0.00000	Example
CoRegistrationParametererA2	Co-registration parameter: A2	6G--1.04960, 10G--0.64760, 18G--0.20170, 23G--0.26610, 36G--0.21810, 50G-0.00000	Example

* The un-hatched indicates the peculiar information of the level 1B product. (Refer to the level 1A product description for the hatched.)

Table 1.2-2 Product Meta Items (4/4)

Items (Attribute Name)	Explanation	Concrete Values or Examples	Fix/ Example
CalibrationCurve Coefficient#1	The radiometric correction coefficient for the 0th order	6GV--0.2099101, 6GH--0.2054645, 10GV--0.0580782, 10GH--0.0103279, 18GV--0.0853578, 18GH--0.0435186, 23GV--0.1288643, 23GH--0.1288643, 36GV--0.0475611, 36GH--0.0536047, 50GV-0.0000000, 52GV-0.0000000, 89GAV--0.0278573, 89GAH--0.0447590, 89GBV--0.0273764, 89GBH--0.0316265	Example
CalibrationCurve Coefficient#2	The radiometric correction coefficient for the 1st order	6GV-1.0756783, 6GH-1.0740756, 10GV-1.0209393, 10GH-1.0037236, 18GV-1.0307711, 18GH-1.0156885, 23GV-1.0464586, 23GH-1.0464586, 36GV-1.0171470, 36GH-1.0193259, 50GV-0.0000000, 52GV-0.0000000, 89GAV-1.0100426, 89GAH-1.0161356, 89GBV-1.0098693, 89GBH-1.0114014	Example
CalibrationCurve Coefficient#3	The radiometric correction coefficient for the 2nd order	6GV--0.0002537, 6GH--0.0002483, 10GV--0.0000704, 10GH--0.0000125, 18GV--0.0001022, 18GH--0.0000522, 23GV--0.0001556, 23GH--0.0001556, 36GV--0.0000575, 36GH--0.0000648, 50GV-0.0000000, 52GV-0.0000000, 89GAV--0.0000334, 89GAH--0.0000537, 89GBV--0.0000329, 89GBH--0.0000379	Example
CalibrationCurve Coefficient#4	The radiometric correction coefficient for the 3rd order	6GV-0.0000000, 6GH-0.0000000, 10GV-0.0000000, 10GH-0.0000000, 18GV-0.0000000, 18GH-0.0000000, 23GV-0.0000000, 23GH-0.0000000, 36GV-0.0000000, 36GH-0.0000000, 50GV-0.0000000, 52GV-0.0000000, 89GV-0.0000000, 89GH-0.0000000	Example
CalibrationCurve Coefficient#5	The radiometric correction coefficient for the 4th order	6GV-0.0000000, 6GH-0.0000000, 10GV-0.0000000, 10GH-0.0000000, 18GV-0.0000000, 18GH-0.0000000, 23GV-0.0000000, 23GH-0.0000000, 36GV-0.0000000, 36GH-0.0000000, 50GV-0.0000000, 52GV-0.0000000, 89GV-0.0000000, 89GH-0.0000000	Example
CalibrationMethod	Calibration method name	RxTemperatureReferenced,SpillOver,CSMInterpolation, Absolute89GPositioning,NonlinearityCorrection * RxTemperatureReferenced may be changed into HTUCoefficients or ElectromagneticAnalysis	Example
HTSCorrectionParameter Version	Parameter version of the HTS correction.	ver0002	Example
SpillOverParameterVersion	Parameter version of the CSM spill over correction	ver0001	Example
CSMInterpolationParameter Version	Parameter version of the CSM interpolation correction	ver0001	Example
Absolute89Gpositioning ParameterVersion	Parameter version of the correction for absolute positions of 89 GHz	ver0002	Example

* The un-hatched indicates the peculiar information of the level 1B product. (Refer to the level 1A product description for the hatched.)

Table 1.2-3 Data Items, Sizes and Scaling Factors (1/2)

No.	Items	Byte	Type	Scaling factor	No. of samples per scan	Units	Dimension
1	Scan_Time	8	double	1.0	1	sec	nscan
2	Position_in_Orbit	8	double	1.0	1	-	nscan
3	Navigation_Data	6*4	float	1.0	6	m,m/s	nscan
4	Attitude_Data	3*4	float	1.0	3	deg	nscan
5	6GHz-V_Birghtness_Temperature	2	signed int	0.1	196	K	196*nscan
6	6GHz-H_Birghtness_Temperature	2	signed int	0.1	196	K	196*nscan
7	10.65GHz-V_Birghtness_Temperature	2	signed int	0.1	196	K	196*nscan
8	10.65GHz-H_Birghtness_Temperature	2	signed int	0.1	196	K	196*nscan
9	18.7GHz-V_Birghtness_Temperature	2	signed int	0.1	196	K	196*nscan
10	18.7GHz-H_Birghtness_Temperature	2	signed int	0.1	196	K	196*nscan
11	23.8GHz-V_Birghtness_Temperature	2	signed int	0.1	196	K	196*nscan
12	23.8GHz-H_Birghtness_Temperature	2	signed int	0.1	196	K	196*nscan
13	36.5GHz-V_Birghtness_Temperature	2	signed int	0.1	196	K	196*nscan
14	36.5GHz-H_Birghtness_Temperature	2	signed int	0.1	196	K	196*nscan
15	50.3GHz-V_Birghtness_Temperature	#1	signed int	0.1	196	K	196*nscan
16	52.8GHz-V_Birghtness_Temperature	#1	signed int	0.1	196	K	196*nscan
17	89.0GHz-A-V_Birghtness_Temperature	2	signed int	0.1	392	K	392*nscan
18	89.0GHz-A-H_Birghtness_Temperature	2	signed int	0.1	392	K	392*nscan
19	89.0GHz-B-V_Birghtness_Temperature	2	signed int	0.1	392	K	392*nscan
20	89.0GHz-B-H_Birghtness_Temperature	2	signed int	0.1	392	K	392*nscan

#1: 50GHz and 52GHz are filled with 0 for AMSR-E

* The un-hatched indicates the peculiar information of the level 1B product. (Refer to the level 1A product description for the hatched.)

Table 1.2-3 Data Items, Sizes and Scaling Factors (2/2)

No.	Items	Byte	Type	Scale factor	No. of samples per scan	Units	Dimension
21	Hot_Load_Count_6_to_52	2	signed int	1.0	16	Count	16*nscan*12
22	Hot_Load_Count_89	2	signed int	1.0	32	Count	32*nscan*4
23	Cold_Sky_Mirror_Count_6_to_52	2	signed int	1.0	16	Count	16*nscan*12
24	Cold_Sky_Mirror_Count_89	2	signed int	1.0	32	Count	32*nscan*4
25	Antenna_Temp_Coef(Of+S1)	4	float	1.0	32	K+K/Cnt	32*nscan
26	Rx_Offset/Gain_Count	2	unsigned int	1.0	32	Count	32*nscan
27	Lat_of_Observation_Point_Except_89B	2	signed int	0.01	486	deg	486*nscan
28	Long_of_Observation_Point_Except_89B	2	signed int	0.01	486	deg	486*nscan
29	Lat_of_Observation_Point_for_89B	2	signed int	0.01	486	deg	486*nscan
30	Long_of_Observation_Point_for_89B	2	signed int	0.01	486	deg	486*nscan
31	Sun_Azimuth	2	signed int	0.1	243	deg	243*nscan
32	Sun_Elevation	2	signed int	0.1	243	deg	243*nscan
33	Earth_Incidence #2	1	signed char	0.02	243	deg	243*nscan
34	Earth_Azimuth	2	signed int	0.01	243	deg	243*nscan
35	Land/Ocean_Flag_for_6_10_18_23_36_50_89A	1	unsigned int	1.0	243	%	243*nscan*7
36	Observation_Supplement	2	-	1.0	27	-	27*nscan
37	SPC_Temperature_Count	2	unsigned int	1.0	20	Count	20*nscan
38	SPS_Temperature_Count	2	unsigned int	1.0	32	Count	32*nscan
39	Data_Quality	4	float	1.0	128	-	128*nscan
40	Interpolation_Flag6_to_52	1	char	1.0	16	-	16*nscan*12
41	Interpolation_Flag_89	1	char	1.0	32	-	32*nscan*4
42	Spill_Over	4	float	1.0	243	mV	243*200scan*2

#2: The Earth Incidence has also sub-attribute "OFFSET". This offset is set to 55.0.

* The un-hatched indicates the peculiar information of the level 1B product. (Refer to the level 1A product description for the hatched.)

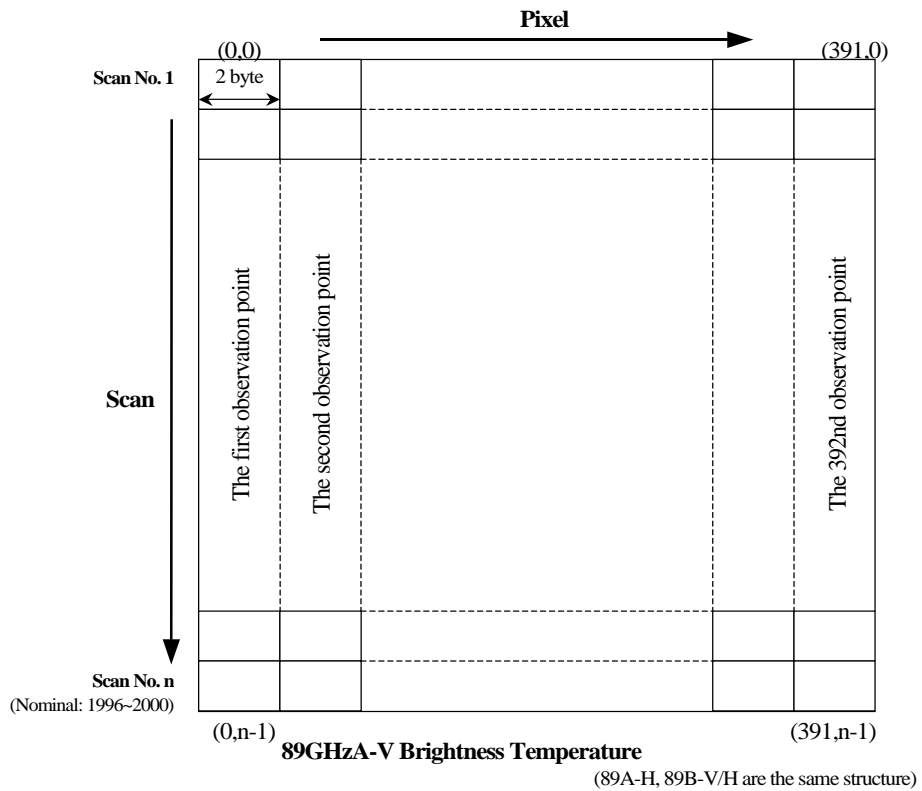
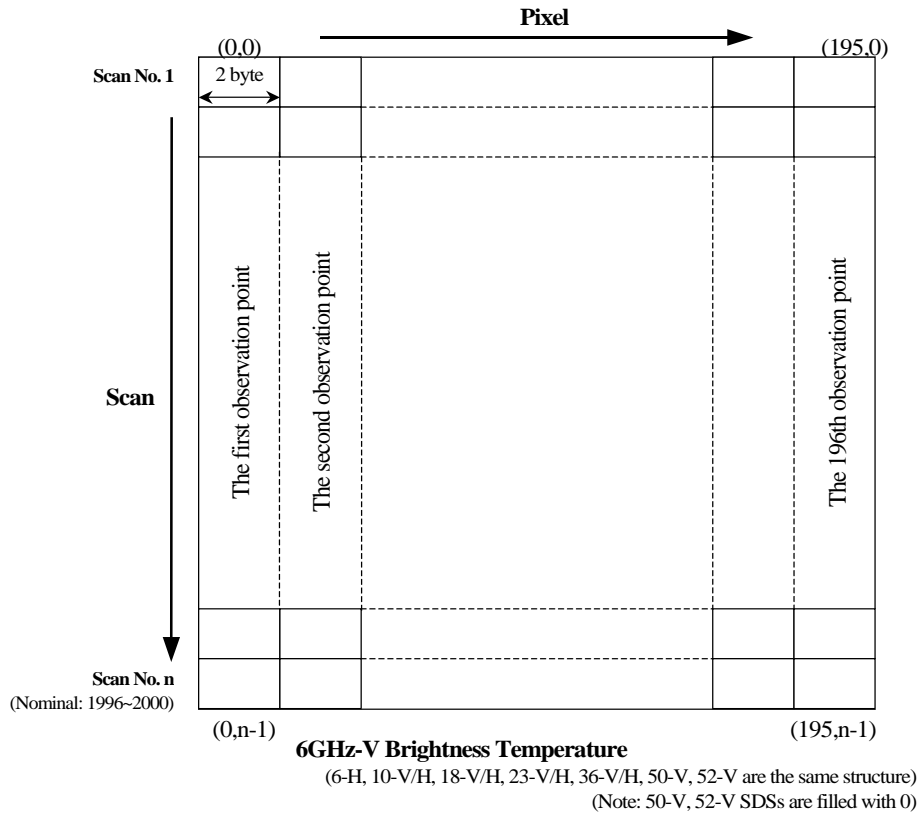


Figure 1.2-2 Structure of Brightness Temperature

1.3. Data Size of one Level 1B Product

The data size of one AMSR-E level 1B product file is shown in Table 1.3-1 in case of 2000 scans. However, the actual file size is 8% smaller because HDF is a compressed format.

Table 1.3-1 Estimation of the Data Volume

AMSR-E Product Data Size				
Item	No. of Samples	No. of Bytes	Semi Total	Remark
Scan Time	1	8	8	
Position in Orbit	1	8	8	
6GHz-V Brightness Temperature	196	2	392	
6GHz-H Brightness Temperature	196	2	392	
10.65GHz-V Brightness Temperature	196	2	392	
10.65GHz-H Brightness Temperature	196	2	392	
18.7GHz-V Brightness Temperature	196	2	392	
18.7GHz-H Brightness Temperature	196	2	392	
23.8GHz-V Brightness Temperature	196	2	392	
23.8GHz-H Brightness Temperature	196	2	392	
36.5GHz-V Brightness Temperature	196	2	392	
36.5GHz-H Brightness Temperature	196	2	392	
50.3GHz-V Brightness Temperature	196	2	392	
52.8GHz-H Brightness Temperature	196	2	392	
89.9GHz-V-A Brightness Temperature	392	2	784	
89.9GHz-H-A Brightness Temperature	392	2	784	
89.9GHz-V-B Brightness Temperature	392	2	784	
89.9GHz-H-B Brightness Temperature	392	2	784	
Hot Load Count 6 to 52	16	2	384	(2*16) * 12 freq
Hot Load Count 89	32	2	256	(2*32) * 4 freq
Cold Sky Mirror Count 6 to 52	16	2	384	(2*16) * 12 freq
Cold Sky Mirror Count 89	32	2	256	(2*32) * 4 freq
Antenna Temp Coef (Of + Sl)	32	4	128	
Rx Offset/Gain Count	32	2	64	
Navigation Data	6	4	24	
Attitude Data	3	4	12	
Lat of Observation Point Except 89B	392	2	784	
Long of Observation Point Except 89B	392	2	784	
Lat of Observation Point for 89B	392	2	784	
Long of Observation Point for 89B	392	2	784	
Sun Azimuth	196	2	392	A scan only
Sun Elevation	196	2	392	A scan only
Earth Incidence	196	1	196	A scan only
Earth Azimuth	196	2	392	A scan only
Land/Ocean Flag	196	1	1372	1*7 for 6,10,23,37,50,89A
Observation Support	27	2	54	
SPC Temperature Count	22	2	44	
SPS Temperature Count	32	2	64	
Data Quality	512	4	2048	
Interpolation Flag 6 to 52	16	1	192	(1*16) * 12 freq
Interpolation Flag 89	32	1	128	(1*32) * 4 freq
Spill Over	243	4	1944	* 2 freq * 200 Scans
Total			19718	
Volume/Granule (MB)			34.3	2000 Scans/Scene
Volume/Day (GB)			1.0	29 Files/Day
Volume/Month (GB)			30.1	30 Days/Month

2. Data Explanation

This chapter shows explanation of each data item of AMSR-E level 1B product excluding common items for level 1A product.

2.1. Core Metadata

(1) ShortName

The abbreviated name of a product is stored. Please refer to the level 1A product description for the details.

(2) LocalGranuleID

The Granule ID based on JAXA EOC ID convention is stored. The Granule ID for level 1B is as follows.

P1AMEYYMMDDPPPMX	_	KNLL0000000
[Scene ID]		
P1		P1 (Fixed: EOS-PM1 Aqua)
AME		AME (Fixed: AMSR-E)
YYMMDD		Date of data acquisition start (UT)
PPP		Path number at the observation start point (001 – 233)
M		M or R (M: regular process / re-process, R: near real time process)
X		A or D (Orbit direction, A: Ascending, D: Descending)
[Product ID]		
K		P or L (P: regular process / re-process, L: near real time process)
N		0 (Fixed: Spare)
LL		1B (Fixed: for level 1B)
0000000		0 (Fixed: Spare)

(3) ProcessingLevelID

The processing level is stored. Please refer to the level 1A product description for the details.

(4) PGEName

The data processing software name is stored. Please refer to the level 1A product description for the details.

2.2. Product Metadata

(1) CoRegistrationParameterA1, CoRegistrationParameterA2

The co-registration parameters A1 and A2 are stored for each frequency. The relation of the number of observation points between level 1B and level 1A is shown the following table. Extraction of the observation width is performed with the same center position in a scan. As a result, the scanning start position is changed from the odd-numbered point in level 1A to the even-numbered point in level 1B, and then the coefficient of A1 changes with processing levels.

Processing Level		Number of observation points	Start Position	Center Position	Note
L1A	Except 89GHz	243	1	122	
	89GHz	486	1	244	
L1B	Except 89GHz	196	1(24*)	99(122*)	*: Position of level 1A
	89GHz	392	1(48*)	197(244*)	*: Position of level 1A

Please refer to the level 1A product description for the calculation method of position using co-registration parameters A1 and A2.

2.3. Data Items

(1) 6GHz-V Brightness Temperature

The observed brightness temperature of 6 GHz vertical polarization is stored.

* The following value is stored for the abnormal observation data. This is applied for all frequencies and polarizations.

Scaling Factor	0.1 (All Frequencies)	
Abnormal Values	-9999	Value for Lack of data
	-32768	Value for Parity error
	The other minus value	Value for Limit Check error

(2) 6GHz-H Brightness Temperature

The observed brightness temperature of 6 GHz horizontal polarization is stored.

(3) 10.65GHz-V Brightness Temperature

The observed brightness temperature of 10.65 GHz vertical polarization is stored.

(4) 10.65GHz-H Brightness Temperature

The observed brightness temperature of 10.65 GHz horizontal polarization is stored.

(5) 18.7GHz-V Brightness Temperature

The observed brightness temperature of 18.7 GHz vertical polarization is stored.

(6) 18.7GHz-H Brightness Temperature

The observed brightness temperature of 18.7 GHz horizontal polarization is stored.

(7) 23.8GHz-V Brightness Temperature

The observed brightness temperature of 23.8 GHz vertical polarization is stored.

(8) 23.8GHz-H Brightness Temperature

The observed brightness temperature of 23.8 GHz horizontal polarization is stored.

(9) 36.5GHz-V Brightness Temperature

The observed brightness temperature of 36.5 GHz vertical polarization is stored.

(10) 36.5GHz-H Brightness Temperature

The observed brightness temperature of 36.5 GHz horizontal polarization is stored.

(11) 50.3GHz-V Brightness Temperature

Since 50.3 GHz is not observed by AMSR-E, 0 fills it.

(12) 52.8GHz-V Brightness Temperature

Since 52.8 GHz is not observed by AMSR-E, 0 fills it.

(13) 89.0GHz-V-A Brightness Temperature

The observed brightness temperature of 89 GHz A-horn's vertical polarization is stored.

(14) 89.0GHz-H-A Brightness Temperature

The observed brightness temperature of 89 GHz A-horn's horizontal polarization is stored.

(15) 89.0GHz-V-B Brightness Temperature

The observed brightness temperature of 89 GHz B-horn's vertical polarization is stored.

(16) 89.0GHz-H-B Brightness Temperature

The observed brightness temperature of 89 GHz B-horn's horizontal polarization is stored.

§L1M

AMSR-E Level 1B Map Product Format Description

Contents

1.	EXPLANATION OF THE PRODUCT	1
1.1.	PRODUCT STRUCTURE	3
1.2.	FILE STRUCTURE	4
1.3.	MAPPING METHOD	18
1.3.1.	<i>Equirectangular projection</i>	18
1.3.2.	<i>Mercator projection</i>	18
1.3.3.	<i>Polar Stereo</i>	18
1.4.	RE-SAMPLING METHOD	19
1.4.1.	<i>The Nearest Neighbor Method</i>	19
1.5.	DATA VOLUME SIZE OF A PRODUCT	20
1.6.	THE OTHERS	21
1.6.1.	<i>The data range of the product</i>	21
1.6.2.	<i>Coordinate System</i>	23
1.6.3.	<i>Scaling Factor</i>	23
2.	DATA EXPLANATION	24
2.1.	CORE METADATA	24
2.2.	PRODUCT METADATA	26
2.3.	EXPLANATION OF EACH DATA	27

1. Explanation of the Product

The Level 1B Map product stores the corrected brightness temperature that projected on the map as HDF. The features of the product are shown below.

- Range of the map projection image
The map projected image expresses the brightness temperature extracted from the specified center position by the region of about 3000 km x 3000 km, and the center position of the image has relations in Table 1-1. And the observation width in the image is about 1450 km that corresponds the level 1B observation width (See Figure. 1-1).
- The method of map projection
The map projection methods are shown below. In each projection method, the range of the center latitude that can be specified is limited (Table 1-2). And the image size is the same in all projection methods.
 - Equirectangular projection
 - Mercator projection
 - Polar Stereo projection
- Main storing data
 - The brightness temperature of the earth observation data (with radiometric correction)
 - The geometric information (position, observation incident angle, sun azimuth angle, etc.)
 - The quality information
 - The others (The information of the satellite, sensor, and product etc.)

Table 1-1 Map projected image size and the interval of a pixel

Frequency	Image size(Pixel)	Flight Direction(km/pixel)	Azimuth Direction(km/pixel)
Except 89GHz	300×300	10	10
89GHz	600×600	5	5

* The 89GHz image is completed by each observation data of A-horn and B-horn along the flight direction.

Table 1-2 Relations between the map projection method and the center latitude

Map projection method	Range of the center latitude (degrees)	Number of input level 1B	Note
Equirectangular	$-60 < \Phi < 60$	1	
Mercator			
Polar Stereo	$-60 \geq \Phi$ $60 \leq \Phi$	1 or 2	When the center latitude is -65 degrees or less and 60 degrees or more, it needs 2 products.

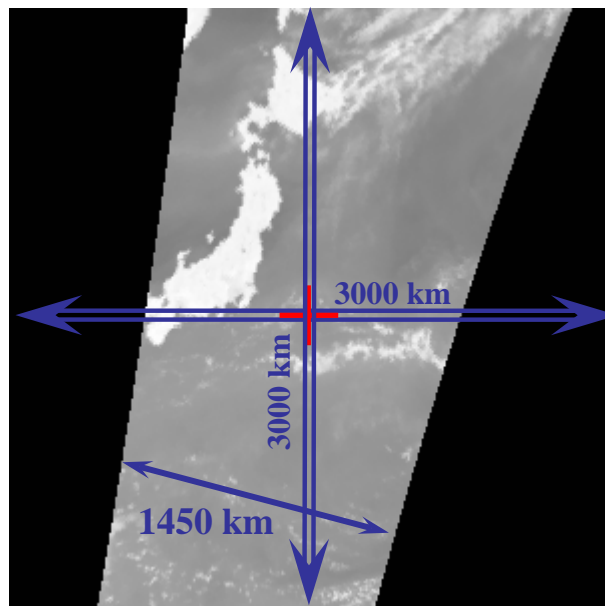


Figure 1-1 the range of the map-projected image
(Example: The map projected image by Mercator projection.)

1.1. Product Structure

The logical structure of level 1B Map product is shown in Table 1.1-1.

Table 1.1-1 Logical Structure of AMSR-E Level 1B Map product


Structure		HDF Data Model	Contents
Header Part	Core Meta	Global Attribute	The general information of the product is stored. It is based on the indispensable item of the attribute of NASA ECS (B. 0). (It is same as level 1B product.)
	Product Meta	Global Attribute	Main characteristics of AMSR-E and the conversion table of the engineering values, etc. are stored. (It is same as level 1B product.)
Data Part		Vdata SDS	The data shown below is stored. <ul style="list-style-type: none"> • Map-projected brightness temperature (all frequencies) • Geometric information (The position of four corners, the observation incident angle, the sun azimuth angle, and the land/ocean flags) • Quality information

1.2. File Structure

The file structure of AMSR-E level 1B Map product is shown in Figure 1.2-1. The explanation for the core metadata of header part is shown in Table 1.2-1, and the product metadata is shown in Table 1.2-2. Moreover, the explanation for each item of data part shows the data size and the scale factor in Table 1.2-3, and the data structure in Figure 1.2-2 - 1.2-16.

[Cautions]

In Table 1.2-1, Table 1.2-2, and Table 1.2-3, un-hatched shows the peculiar information of the level 1B Map product. The explanation subsequent to Chapter 2 shows only peculiar information of the level 1B Map product, and the common items (the hatched) with level 1A product are explained in the level 1A product format description.

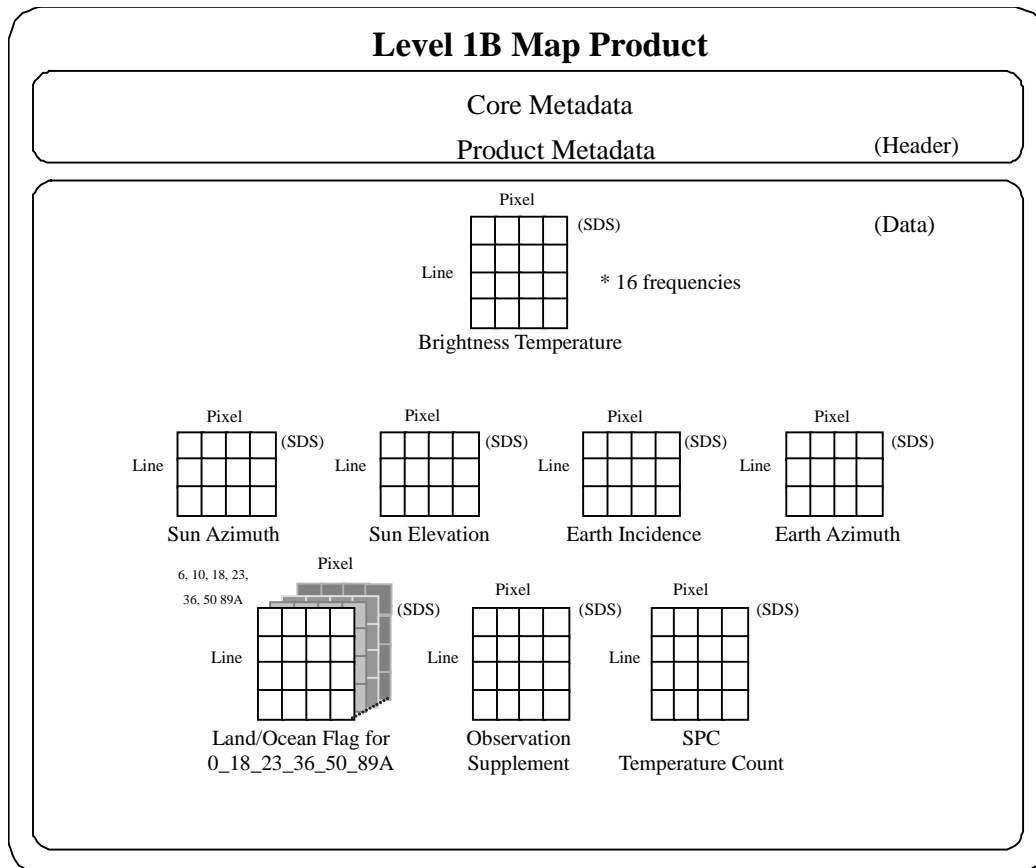

Data Structure

Figure 1.2-1 The Data Structure

Table 1.2-1 Core Meta Items (1/3)

Items (Attribute Name)	Explanation	Concrete Values or Examples	Attention	Fix/ Example
ShortName	The abbreviated name of the product	AMSREL1M		Fix
VersionID	The version ID of the product	RELEASE3		Example
SizeMBECSDataGranule	Data size of the product (Mbytes)	36.6		Example
LocalGranuleID	Product management number	P1AME020729210MD_001MMN00NWTN50		Example
ProcessingLevelID	ID of processing level	L1M		Fix
ReprocessingActual	Re-processing date (UTC)	blank or 2002-08-10	Date only set for Re-processing (0-Fill for blank)	Example
ProductionDateTime	Product creation date (UTC)	2002-07-29T07:14:29.000Z	0-Fill for blank	Example
RangeBeginningTime	Start time of observation data (UTC)	02:57:17.53Z	0-Fill for blank	Example
RangeBeginningDate	Start date of observation data	2002-07-29	0-Fill for blank	Example
RangeEndingTime	End time of observation data (UTC)	03:47:06.81Z	0-Fill for blank	Example
RangeEndingDate	End date of observation data	2002-07-29	0-Fill for blank	Example
GringPointLatitude1	Latitude at the upper left of a image	+61.66		Example
GringPointLongitude1	Longitude at the upper left of a image	-36.01		Example
GringPointLatitude2	Latitude at the lower left of a image	+34.09		Example
GringPointLongitude2	Longitude at the lower left of a image	-36.01		Example
GringPointLatitude3	Latitude at the lower right of a image	+34.09		Example
GringPointLongitude3	Longitude at the lower right of a image	+5.84		Example
GringPointLatitude4	Latitude at the upper right of a image	+61.66		Example
GringPointLongitude4	Longitude at the upper right of a image	+5.84		Example

* The un-hatched indicates the peculiar information of the level 1B Map product. (Refer to the level 1A product description for the hatched.)

Table 1.2-1 Core Meta Items (2/3)

Items (Attribute Name)	Explanation	Concrete Values or Examples	Attention	Fix/ Example
PGENAME	Data processing software name	L1BMAP-Process-Software		Fix
PGEVersion	Data processing software version	333*33****33330333		Example
InputPointer	Input file name	R1540402SGS0221003170100.RBD, R1540402SGS0221005320100.RBD		Example
ProcessingCenter	Data processing center	JAXA EOC		Fix
ContactOrganization Name	Contact organization name	JAXA,1401 Ohhashi Hatoyama-Machi,Hiki-gun, Saitama,350-0393,Japan,+81-49-298-1307, orderdesk@eoc.jaxa.jp		Fix
StartOrbitNumber	Start orbit number	1251		Example
StopOrbitNumber	End orbit number	1251		Example
EquatorCrossing Longitude	Longitude at the time of equatorial passage	-28.80		Example
EquatorCrossingDate	Date of equatorial passage	2002-07-29	0-Fill for blank	Example
EquatorCrossingTime	Time of equatorial passage	03:24:14.41Z	0-Fill for blank	Example
OrbitDirection	Orbit direction	DESCENDING		Example
EphemerisGranule Pointer	Orbital data file name	R1540957SGS0221003170100.RBD		Example
EphemerisType	Type of orbital data	ELMP		Example
PlatformShortName	Abbreviated name of Platform	EOS-PM1		Fix
SensorShortName	Sensor name	AMSR-E		Fix
NumberOfScans	Number of scans	1994		Example
NumberOfMissingScans	Number of missing packets	1		Example
ECSDataModel	Meta data model name	B.0		Fix
DiscontinuityVirtual ChannelCounter	Judgement of virtual channel unit counter discontinuity	DEAD Encounter		Example
QALocationPacket Discontinuity	Judgment of packet sequence counter discontinuity	discontinuation		Example

* The un-hatched indicates the peculiar information of the level 1B Map product. (Refer to the level 1A product description for the hatched.)

Table 1.2-1 Core Meta Items (3/3)

Items (Attribute Name)	Explanation	Concrete Values or Examples	Attention	Fix/ Example
NumberOfPackets	Number of packets	31904		Example
NumberOfInputFiles	Number of input files	2		Example
NumberMissingPackets	Number of missing packets	1		Example
NumberOfGoodPackets	Number of good packets	31903		Example
ReceivingCondition	Receiving condition	blank		Fix
EphemerisQA	Ephemeris limit check	OK		Example
AutomaticQAFlag	Limit check by software	PASS		Example
AutomaticQAFlag Explanation	Explanation of limit check by software	1.ProcessedAnomalyQA:Less than 20 is available->OK, 2.InputAnomalyQA:Less than 20 is available->OK, All items are OK, 'PASS' is employed		Fix
ScienceQualityFlag	The quality flag when computing the amount of physics	blank		Fix
ScienceQualityFlag Explanation	Explanation of the quality flag when computing the amount of physics	blank		Fix
QAPercentMisssingData	Percentage of missing data	0		Example
QAPercentOut ofBoundsData	Percentage of out of bound data	0		Example
QAPercentParityErrorData	Percentage of parity error data	0		Example
ProcessingQADescription	Description of the processing error	PROC_COMP		Example
ProcessingQAAttrirbute	The attribute name which is abnormal by QA metadata	brank or NumberOfMissingPackets	An attribute name is set up only at the time of unusual generating.	Example

* The un-hatched indicates the peculiar information of the level 1B Map product. (Refer to the level 1A product description for the hatched.)

Table 1.2-2 Product Meta Items (1/4)

Items (Attribute Name)	Explanation	Concrete Values or Examples	Fix/ Example
SatelliteOrbit	The kind of Satellite's orbit	Sun-synchronous_sub-recurrent	Fix
Altitude	The altitude of Satellite	707.9km	Fix
OrbitSemiMajorAxis	The orbit semi-major axis	7085.858km	Fix
OrbitEccentricity	The orbital eccentricity	0.00095	Fix
OrbitArgumentPerigee	The orbital argument perigee	106.480deg	Fix
OrbitInclination	The orbital inclination	98.15deg	Fix
OrbitPeriod	The orbital period	98minutes	Fix
RevisitTime	Orbit recurrent days	16days	Fix
AMSRChannel	The kind of AMSR channels	6.925GHz,10.65GHz,18.7GHz,23.8GHz,36.5GHz,89.0GHz-A,89.0GHz-B	Fix
AMSRBandWidth	Band width of AMSR	6G-350MHz,10G-100MHz,18G-200MHz,23G-400MHz,36G-1000MHz, 50.3G-0,52G-0,89GA-3000MHz,89GB-3000MHz	Fix
AMSRbeamWidth	Beam width of AMSR	6G-1.8deg,10G-1.2deg,18G-0.64deg,23G-0.75deg,36G-0.35deg,50.3G-0,52G-0,89GA-0.15deg ,89GB-0.15deg	Fix
OffNadir	Off-nadir angle	47.0deg: 89GB, 47.5deg: others	Fix
SpatialResolution(AzX El)	Spatial resolution	6G-43.2kmX75.4km,10G-29.4kmX51.4km,18G-15.7kmX27.4km,23G-18.1kmX31.5km, 36G-8.2kmX14.4km,50.3G- ,52G- ,89GA-3.7kmX6.5km,89GB-3.5kmX5.9km	Fix
ScanningPeriod	Scanning period	1.5sec	Fix
SwathWidth	Swath width	1450km	Fix
DynamicRange	Dynamic range	2.7K-340K	Fix
DataFormatType	Data format type	NCSA-HDF	Fix
HDFFormatVersion	HDF format version	Ver4.2r4	Fix
EllipsoidName	Earth ellipse model	WGS84	Fix
SemiMajorAxisofEarth	Earth equatorial radius	6378.1km	Fix
FlatteningRatioofEarth	Flattening ratio of earth	0.00335	Fix
SensorAlignment	Sensor alignment	Rx=0.00000,Ry=0.00000,Rz=0.00000	Fix
ThermistorCountRang eWx	The effective range of a thermistor engineering value conversion factor	60,585,770,872,924,952,961,1023	Fix

* The un-hatched indicates the peculiar information of the level 1B Map product. (Refer to the level 1A product description for the hatched.)

Table 1.2-2 Product Meta Items (2/4)

Items (Attribute Name)	Explanation	Concrete Values or Examples	Fix/ Example
ThermistorConversionTable Wa	Thermistor conversion table: Wa	0.000000,0.000015,0.000161,0.000618,0.002331,0.011459,0.010101,0.000000	Fix
ThermistorConversionTable Wb	Thermistor conversion table: Wb	0.000000,0.056460,-0.109878,-0.819170,-3.801865,-20.783040,-18.212120,0.000000	Fix
ThermistorConversionTable Wc	Thermistor conversion table: Wc	-35.000000,-38.250000,9.220000,284.170000,1582.770000,9480.000000,8263.350000,90.000000	Fix
ThermistorConversionTable Wd	Thermistor conversion table: Wd	0.0,0.0,0.0,0.0,0.0,0.0,0.0,0.0	Fix
Platinum#1CountRangeWx	Platinum#1 count range: Wx	1168,1296,1536,1752,4095	Fix
Platinum#1ConversionTableWa	Platinum#1 conversion table: Wa	0.0,0.0,0.0,0.0,0.0	Fix
Platinum#1ConversionTableWb	Platinum#1 conversion table: Wb	0.000000,0.039000,0.042000,0.039000,0.042000	Fix
Platinum#1ConversionTableWc	Platinum#1 conversion table: Wc	-35.000000,-80.625000,-84.000000,-80.000000,-84.667000	Fix
Platinum#1ConversionTableWd	Platinum#1 conversion table: Wd	0.0,0.0,0.0,0.0,0.0	Fix
Platinum#2CountRangeWx	Platinum#2 count range: Wx	272,1536,1792,2032,2288,3248,3712,4095	Fix
Platinum#2ConversionTableWa	Platinum#2 conversion table: Wa	0.0,0.0,0.0,0.0,0.0,0.0,0.0,0.0	Fix
Platinum#2ConversionTableWb	Platinum#2 conversion table: Wb	0.000000,0.078300,0.078000,0.083000,0.078000,0.083000,0.085300,0.000000	Fix
Platinum#2ConversionTableWc	Platinum#2 conversion table: Wc	-140.000000,-161.440000,-160.000000,-169.333000,-158.750000,-170.667000,-177.640000,140.000000	Fix
Platinum#2ConversionTableWd	Platinum#2 conversion table: Wd	0.0,0.0,0.0,0.0,0.0,0.0,0.0,0.0	Fix

* The un-hatched indicates the peculiar information of the level 1B Map product. (Refer to the level 1A product description for the hatched.)

Table 1.2-2 Product Meta Items (3/4)

Items (Attribute Name)	Explanation	Concrete Values or Examples	Fix/ Example
Platinum#3CountRange Wx	Platinum#3 count range: Wx	349,1454,2000,2555,3059,3566,4020,4095	Fix
Platinum#3ConversionTableWa	Platinum#3 conversion table: Wa	0.0,0.0,0.0,0.0,0.0,0.0,0.0,0.0	Fix
Platinum#3ConversionTableWb	Platinum#3 conversion table: Wb	0.000000,0.009100,0.009100,0.009100,0.009900,0.009900,0.008500,0.000000	Fix
Platinum#3ConversionTableWc	Platinum#3 conversion table: Wc	0.000000,6.845000,6.803800,6.803800,4.719500,4.719500,9.835000,44.000000	Fix
Platinum#3ConversionTableWd	Platinum#3 conversion table: Wd	0.0,0.0,0.0,0.0,0.0,0.0,0.0,0.0	Fix
CoefficientAvv	Coefficient: Avv	6G-1.037,10G-1.032,18G-1.025,23G-1.032,36G-1.029,50G-0.000,52G-0.000,89GA-1.025,89GB-1.029	Fix
CoefficientAhv	Coefficient: Ahv	6G--0.003,10G--0.003,18G--0.003,23G--0.004,36G--0.004,50G-0.000,52G-0.000,89GA--0.003,89GB--0.004	Fix
CoefficientAov	Coefficient: Aov	6G--0.034,10G--0.029,18G--0.022,23G--0.028,36G--0.024,50G-0.000,52G-0.000,89GA--0.022,89GB--0.024	Fix
CoefficientAhh	Coefficient: Ahh	6G-1.037,10G-1.031,18G-1.025,23G-1.034,36G-1.029,50G-0.000,52G-0.000,89GA-1.028,89GB-1.031	Fix
CoefficientAvh	Coefficient: Avh	6G--0.003,10G--0.002,18G--0.003,23G--0.006,36G--0.004,50G-0.000,52G-0.000,89GA--0.006,89GB--0.006	Fix
CoefficientAoh	Coefficient: Aoh	6G--0.034,10G--0.029,18G--0.022,23G--0.028,36G--0.024,50G-0.000,52G-0.000,89GA--0.022,89GB--0.024	Fix
CSMTemperature	Brightness temperature of the deep space	6GV-2.800, 6GH-2.800, 10GV-2.800, 10GH-2.800, 18GV-2.800, 18GH-2.800, 23GV-2.800, 23GH-2.800, 36GV-2.800, 36GH-2.800, 50GV-0.000, 52GV-0.000, 89GAV-2.800, 89GAH-2.800, 89GBV-2.800, 89GBH-2.800	Fix
CoRegistrationParameterA1	Co-registration parameter: A1	6G-0.10450, 10G--0.34960, 18G--0.32010, 23G--0.25950, 36G--0.31510, 50G-0.00000 (These are stored same values as level 1B product.)	Fix
CoRegistrationParameterA2	Co-registration parameter: A2	6G--1.04960, 10G--0.64760, 18G--0.20170, 23G--0.26610, 36G--0.21810, 50G-0.00000 (These are stored same values as level 1B product.)	Fix

* The un-hatched indicates the peculiar information of the level 1B Map product. (Refer to the level 1A product description for the hatched.)

Table 1.2-2 Product Meta Items (4/4)

Items (Attribute Name)	Explanation	Concrete Values or Examples	Fix/ Example
Re-samplingMethod	Re-sampling method	NN	Fix
PixelSpacingExcept89G	Pixel resolution except 89 GHz	10km	Fix
PixelSpacingFor89G	Pixel resolution of 89 GHz	5km	Fix
ImageSizeExcept89G(Pixel)	Image size (pixel) except 89 GHz	300	Fix
ImageSizeFor89G(Pixel)	Image size (pixel) of 89 GHz	600	Fix
ImageSizeExcept89G(Line)	Image size (line) except 89 GHz	300	Fix
ImageSizeFor89G(Line)	Image size (line) of 89 GHz	600	Fix

* The un-hatched indicates the peculiar information of the level 1B Map product. (Refer to the level 1A product description for the hatched.)

* The level 1B Map product does not store following product meta data in level 1B product.

- CalibrationCurveCoefficient#1-#4
- CalibrationMethod
- HTSCorrectionParameterVersion
- SpillOverParameterVersion
- CSMInterporationParameterVersion
- Absolute89PositioningParameterVersion

Table 1.2-3 Data Size and Scaling Factor of Attribute Items

No.	Items	Byte	Type	Scale factor	Units	Dimension
1	6GHz-V Brightness Temperature	2	signed int	0.1	K	300×300
2	6GHz-H Brightness Temperature	2	signed int	0.1	K	300×300
3	10.65GHz-V Brightness Temperature	2	signed int	0.1	K	300×300
4	10.65GHz-H Brightness Temperature	2	signed int	0.1	K	300×300
5	18.7GHz-V Brightness Temperature	2	signed int	0.1	K	300×300
6	18.7GHz-H Brightness Temperature	2	signed int	0.1	K	300×300
7	23.8GHz-V Brightness Temperature	2	signed int	0.1	K	300×300
8	23.8GHz-H Brightness Temperature	2	signed int	0.1	K	300×300
9	36.5GHz-V Brightness Temperature	2	signed int	0.1	K	300×300
10	36.5GHz-H Brightness Temperature	2	signed int	0.1	K	300×300
11	50.3GHz-V Brightness Temperature #1	2	signed int	0.1	K	300×300
12	52.8GHz-V Brightness Temperature #1	2	signed int	0.1	K	300×300
13	89.0GHz-V Brightness Temperature	2	signed int	0.1	K	600×600
14	89.0GHz-H Brightness Temperature	2	signed int	0.1	K	600×600
15	Sun Azimuth	2	signed int	0.1	deg	300×300
16	Sun Elevation	2	signed int	0.1	deg	300×300
17	Earth Incidence #2	1	signed char	0.02	deg	300×300
18	Earth Azimuth	2	signed int	0.01	deg	300×300
19	Land/Ocean flag for 6,10,18,23,37,50,89A	1	unsigned char	1.0	%	300×300
20	Data Quality Except89G	1	-	-	-	300×300
21	Data Quality For 89G	1	-	-	-	600×600

#1 50GHz and 52GHz are filled with 0 for AMSR-E

#2 The Earth Incidence has also sub-attribute "OFFSET". This offset is set to 55.0.

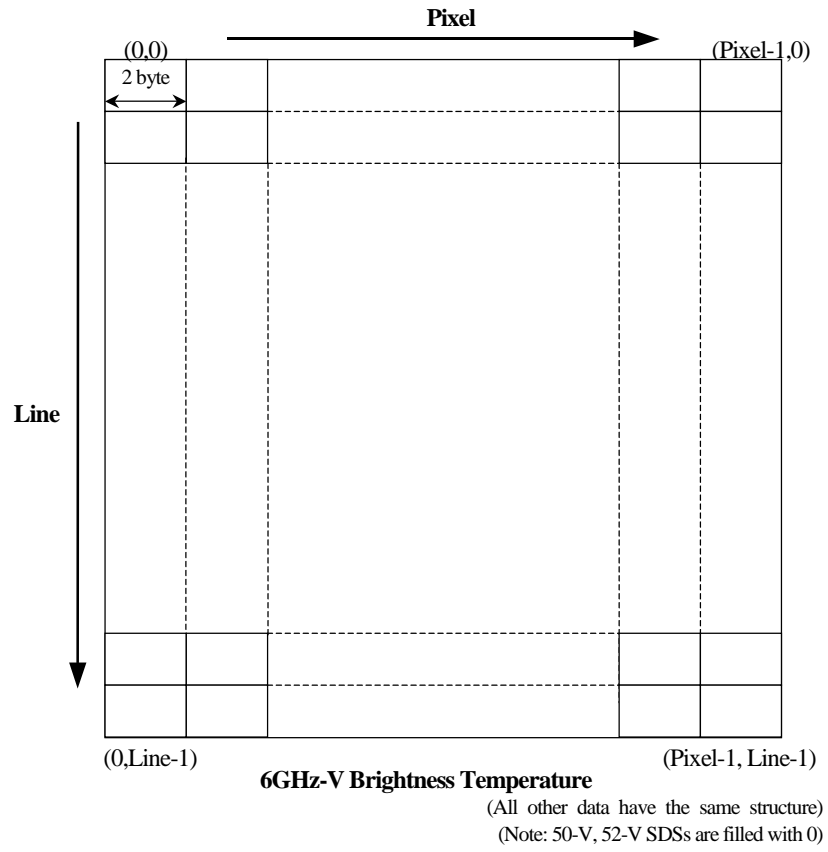


Figure 1.2-2 Structure of the Mapped Brightness Temperature (Image Data)

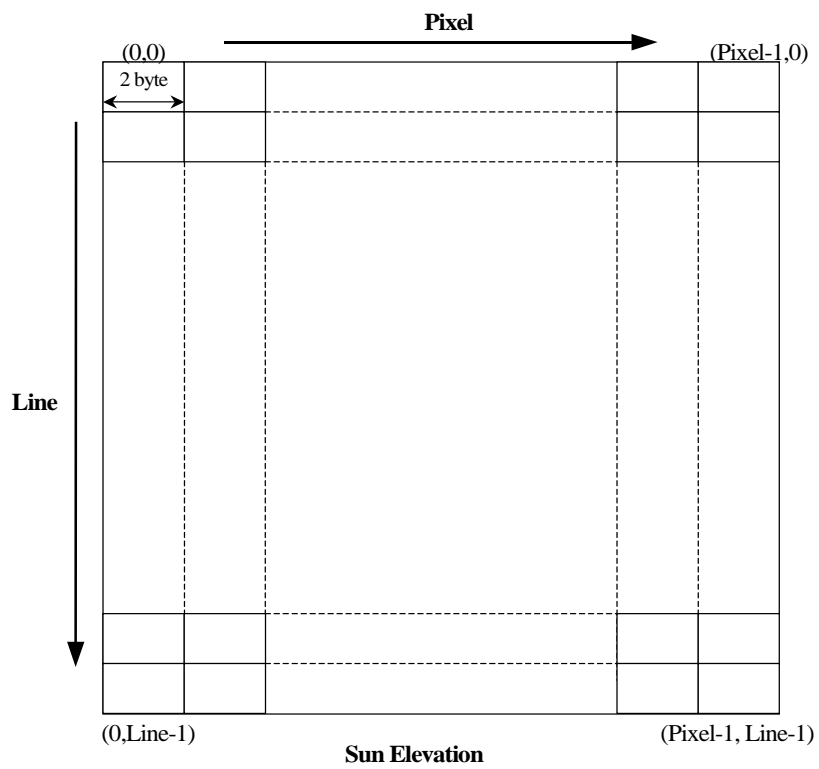
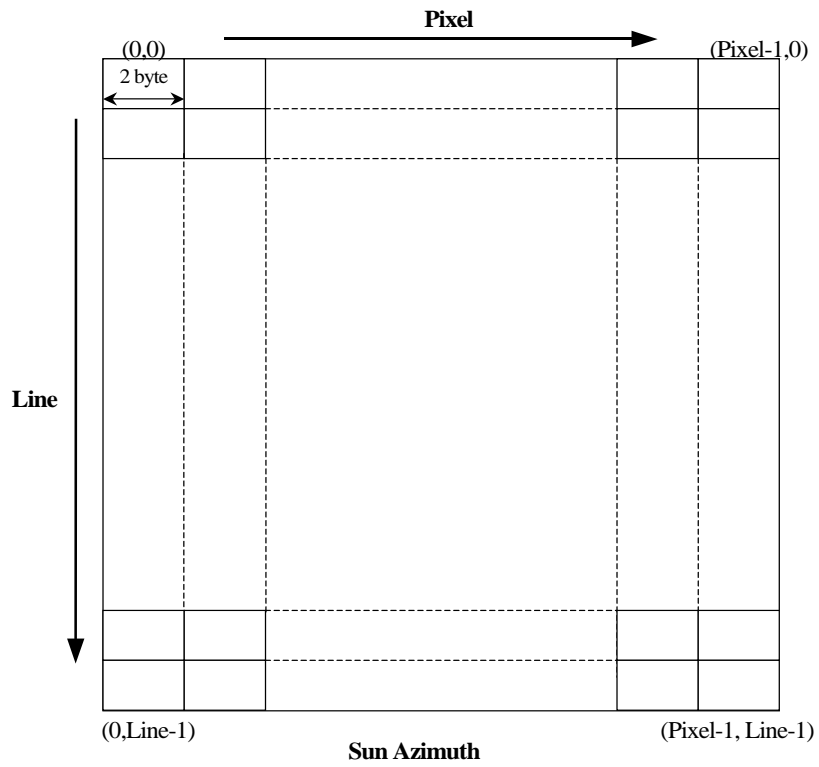


Figure 1.2-3 Structure of Sun Azimuth and Sun Elevation



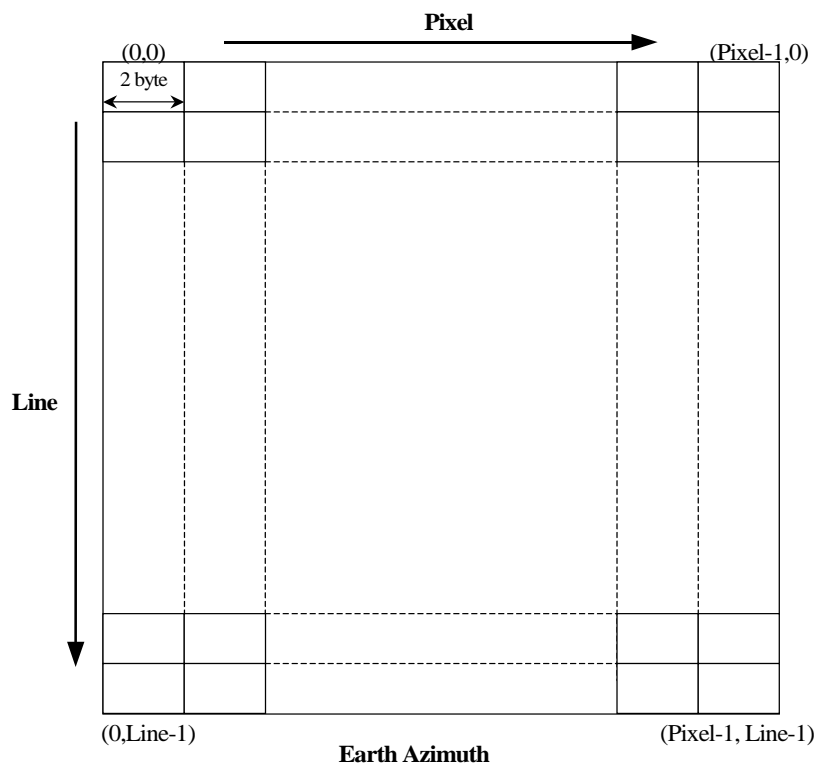


Figure 1.2-4 Structure of Earth Incidence and Earth Azimuth

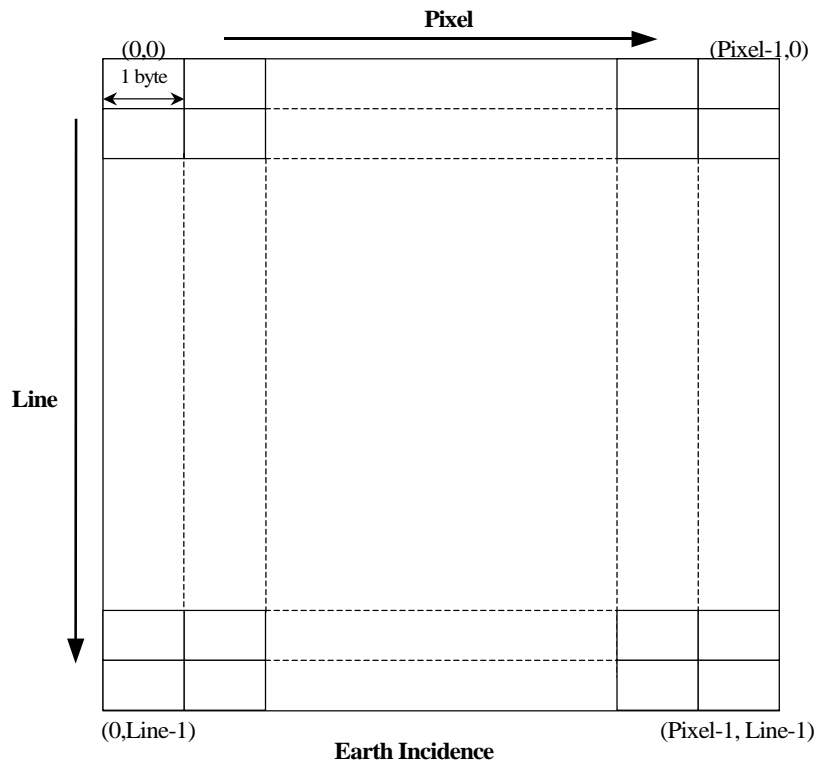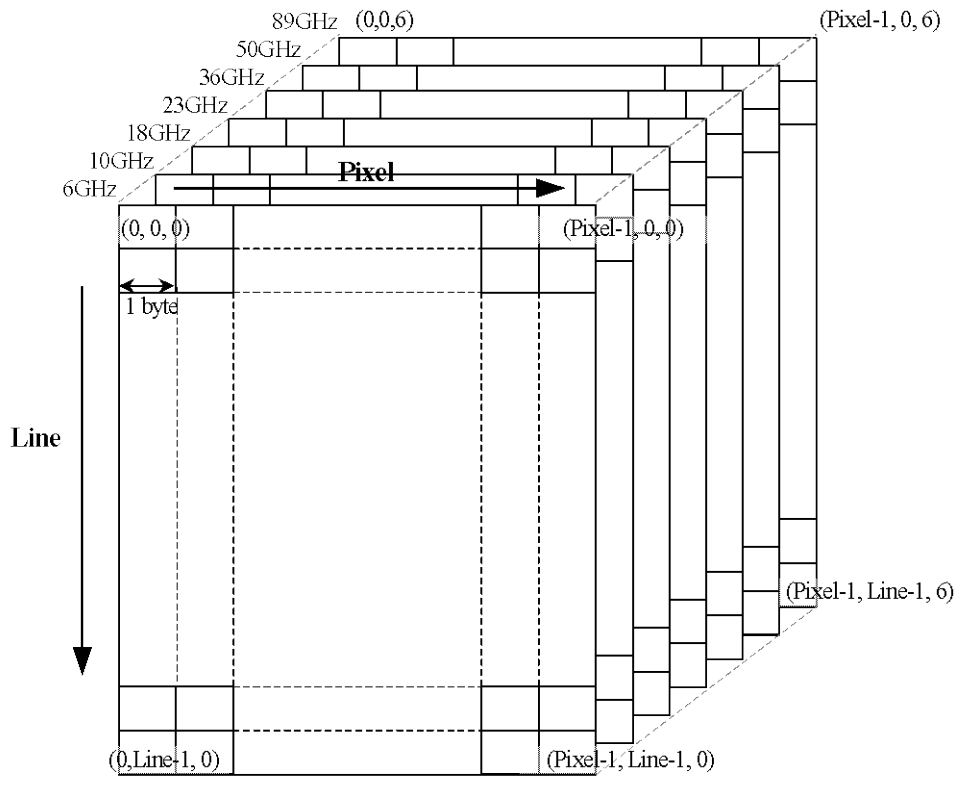

Land/Ocean Flag for 6_10_18_23_36_50_89A

(Note: 50GHz-V, 52GHz-V SDSs are filled with 0)

Figure 1.2-5 Structure of Land/Ocean Flag

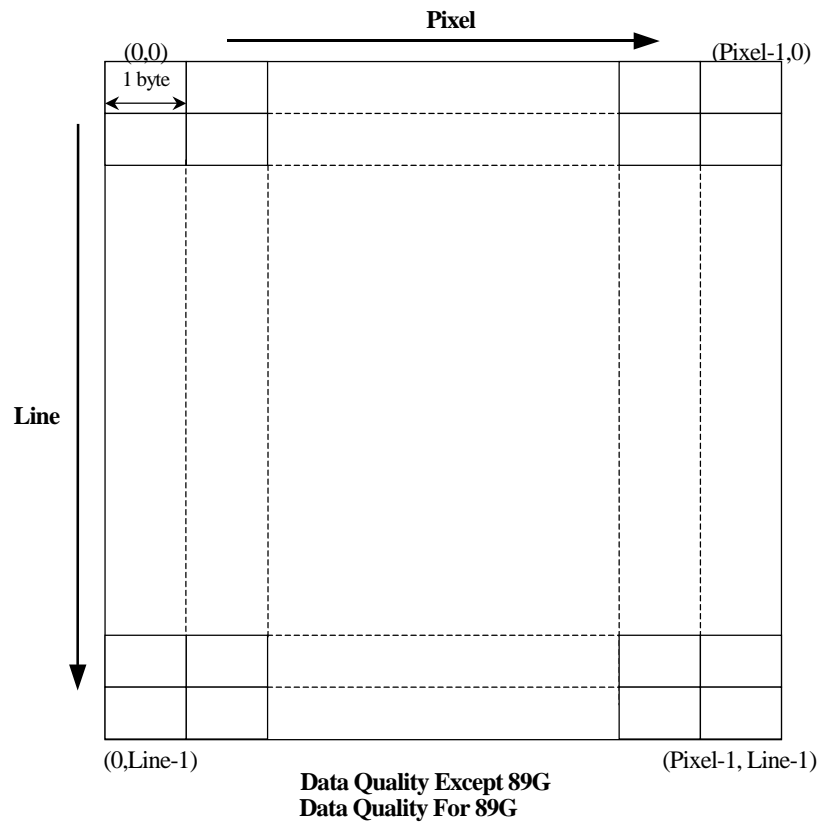


Figure 1.2-6 Structure of Data Quality

1.3. Mapping method

The level 1B Map product is the re-sampled image that used one of the following map projection methods.

- Equirectangular projection
- Mercator projection
- Polar Stereo projection

1.3.1. Equirectangular projection

The latitude and longitude (ϕ, λ) of the observing point are convertible for the equirectangular coordinates (x, y) by the following formula.

$$\begin{aligned} x &= \lambda \\ y &= \phi \end{aligned}$$

1.3.2. Mercator projection

In Mercator method, the latitude and longitude (ϕ, λ) are convertible for the Mercator coordinates (x, y) by the following formula.

$$\begin{aligned} x &= \text{Re}(\lambda - \lambda_0) \\ y &= \text{Re} \ln \left\{ \tan \left(\frac{\pi}{4} + \frac{1}{2}(\phi - \phi_0) \frac{1 - e \sin(\phi - \phi_0)}{1 + e \sin(\phi - \phi_0)} \right)^{e/2} \right\} \end{aligned}$$

In the above formula, Re is the earth equatorial radius (the longer radius), and e is the eccentricity of the earth expressed in the following formula using the longer radius Ra, and the shorter radius Rb.

$$e = \sqrt{1 - \frac{R_b^2}{R_a^2}}$$

1.3.3. Polar Stereo

In Polar Stereo method, the latitude and longitude (ϕ, λ) are converted into (x, y) by following steps.

(1) Calculate the geocentric latitude

$$\phi' = \tan^{-1} \{ (1 - e^2) \tan \phi \}$$

(2) Calculate the x,y in the Polar Stereo coordinate

Using the following formula, the positions of x,y are calculated

1) In case of the northern hemisphere,

$$\begin{aligned} \frac{x}{m_0} &= -\text{Re} \frac{\sqrt{(1 - e^2)} \cos \phi}{\sqrt{(1 - e^2) \cos^2 \phi + \sin^2 \phi'}} \cdot \sin(-\lambda) \\ \frac{y}{m_0} &= -\text{Re} \frac{\sqrt{(1 - e^2)} \cos \phi}{\sqrt{(1 - e^2) \cos^2 \phi + \sin^2 \phi'}} \cdot \cos(-\lambda) \end{aligned}$$

2) In case of the southern hemisphere,

$$\begin{aligned} \frac{x}{m_0} &= \text{Re} \frac{\sqrt{(1 - e^2)} \cos \phi}{\sqrt{(1 - e^2) \cos^2 \phi + \sin^2 \phi'}} \cdot \sin(-\lambda) \\ \frac{y}{m_0} &= \text{Re} \frac{\sqrt{(1 - e^2)} \cos \phi}{\sqrt{(1 - e^2) \cos^2 \phi + \sin^2 \phi'}} \cdot \cos(-\lambda) \end{aligned}$$

In the above formula, the R_e , e , m_0 are defined as follows,

R_e : The earth equatorial radius

e : The eccentricity

m_0 : The scaling factor at the origin (1.0)

1.4. Re-sampling Method

The value of 1 pixel of the map-projected image is re-sampled brightness temperature of the level 1B product. The re-sampling method used by level 1B Map processing is only the nearest neighbor method (the NN method).

1.4.1. The Nearest Neighbor Method

As the value of the observation point $P'(u, v)$, the nearest neighbor method adopts the nearest observation point P from four points, which enclose the observation point $P'(u, v)$, and it is expressed with the following formula.

$$P'_{u,v} = P_{ij}$$

$$i = [u+0.5]$$

$$j = [v+0.5]$$

In the above formula, $[]$ is the gauss symbol, and that value is expressed with an integer value.

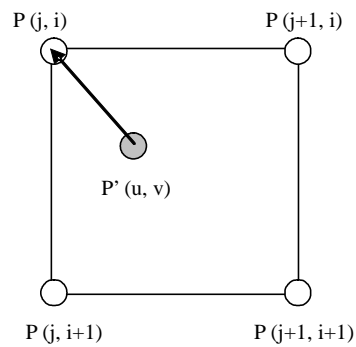


Figure 1.4-1 Explanation of the nearest neighbor method

1.5. Data volume size of a product

The data volume size of AMSR-E level 1B Map product is shown in Table 1.5-1.

Table 1.5-1 Estimation of the Data Volume

Item	No. of Pixel	No. of Line	No. of Bytes	Semi Total	Remark
6.9GHz-V Mapped Brightness Temperature	300	300	2	180000	
6.9GHz-H Mapped Brighness Temperature	300	300	2	180000	
10.7GHz-V Mapped Brightness Temperature	300	300	2	180000	
10.7GHz-H Mapped Brighness Temperature	300	300	2	180000	
18.7GHz-V Mapped Brightness Temperature	300	300	2	180000	
18.7GHz-H Mapped Brighness Temperature	300	300	2	180000	
23.8GHz-V Mapped Brightness Temperature	300	300	2	180000	
23.8GHz-H Mapped Brighness Temperature	300	300	2	180000	
36.5GHz-V Mapped Brightness Temperature	300	300	2	180000	
36.5GHz-H Mapped Brighness Temperature	300	300	2	180000	
50.3GHz-V Mapped Brightness Temperature	300	300	2	180000	
52.8GHz-V Mapped Brightness Temperature	300	300	2	180000	
89.0GHz-V Mapped Brightness Temperature	600	600	2	720000	
89.0GHz-H Mapped Brighness Temperature	600	600	2	720000	
Sun Azimuth	300	300	2	180000	
Sun Elevation	300	300	2	180000	
Earth Incidence	300	300	1	90000	
Earth Azimuth	300	300	2	180000	
Land/Ocean Flag	300	300	1	630000	1*7 for 6,10,23,37,50,89A
DataQualityExcept89G	300	300	1	90000	
DataQualityFor89G	600	600	1	360000	
Total				5310000	
Volume/Granule (MB)				5.1	
Volume/Day (GB)				0.143	29 Files/Day
Volume/Month (GB)				4.302	30 Days/Month

1.6. The others

1.6.1. The data range of the product

Since the observation width of AMSR-E is about 1450 km, the map-projected region (3000 km x 3000 km) is not filled with brightness temperature. Therefore, the region that cannot acquire the brightness temperature value from the level 1B product stores the dummy value (0). (See Figure 1.6.1-1) And items of 50 GHz and 52 GHz vertical polarization which are not observed by AMSR-E also stores the dummy value.

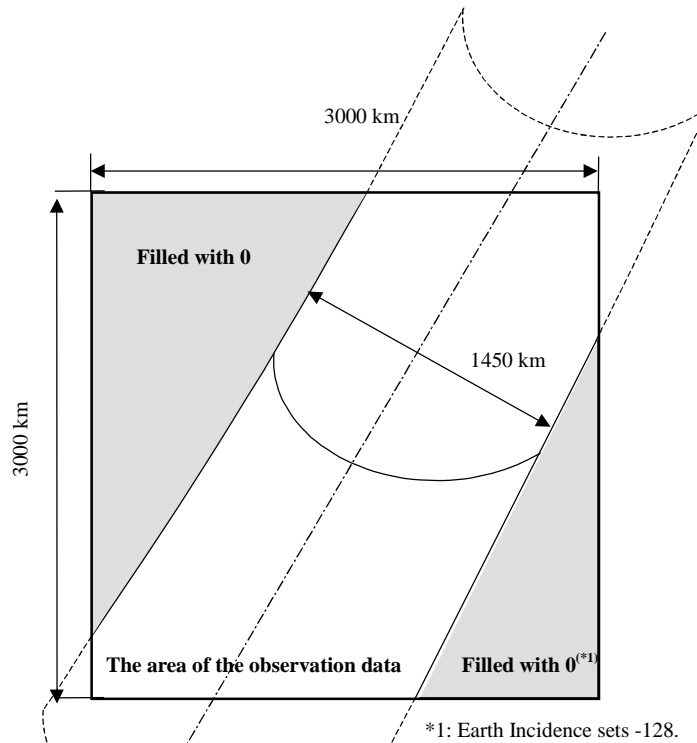


Figure 1.6.1-1 the region of map image data

In case of the Polar Stereo projection, directions of mapped image between Northern Hemisphere and Southern Hemisphere differ as shown in Figure 1.6.1-2 and Figure 1.6.1-3.

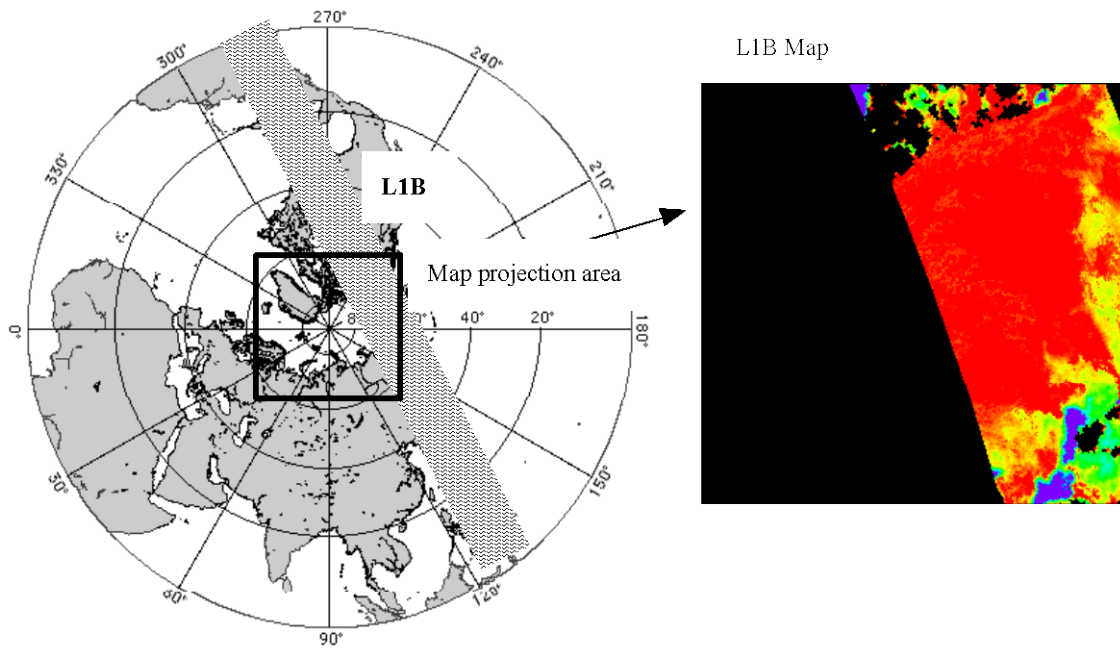


Figure 1.6.1-2 Direction of map projection (the Northern Hemisphere)

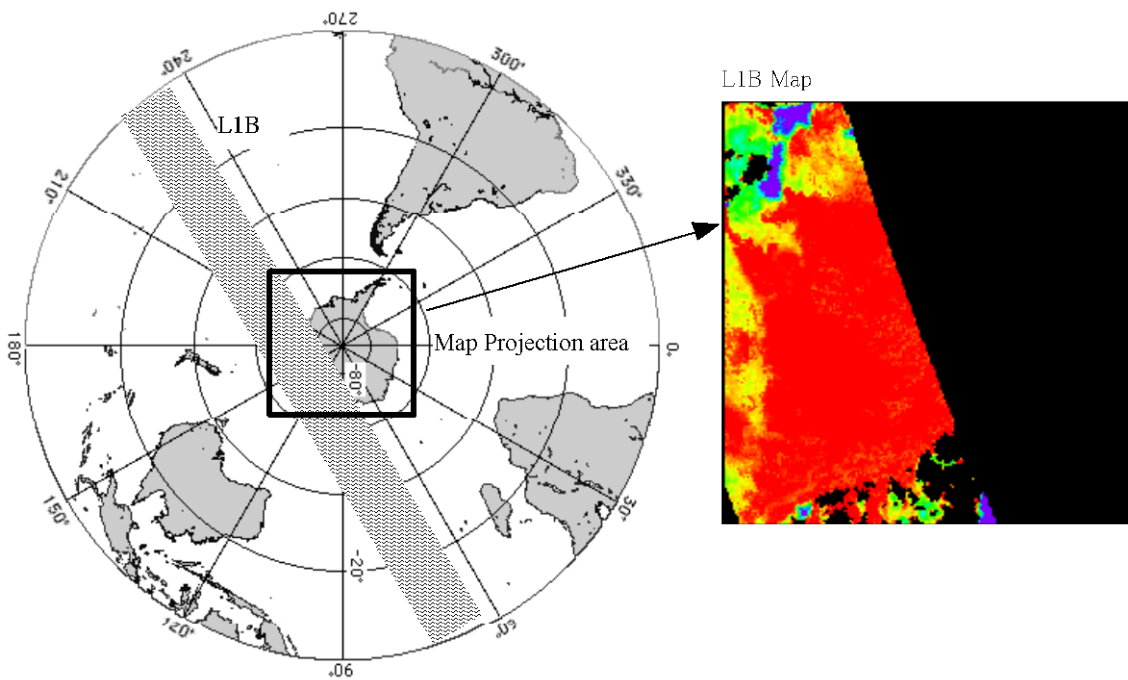


Figure 1.6.1-3 Direction of map projection (the Southern Hemisphere)

1.6.2. Coordinate System

The position information stored in the AMSR-E level 1B Map product is the latitude and longitude that are used for map projection of the observation brightness temperature.

It is represented by the Greenwich coordinate system (earth fixed coordinate system), and the range of latitude is from -90 to 90 degrees, and the range of longitude is from -180 to 180 degrees. The earth model currently used by geometrical calculation is WGS84.

1.6.3. Scaling Factor

In order to make data volume small, scaling factors are applied for some floating number in AMSR-E level 1B Map.

The scale factor is stored with the data unit in the attribute information on Vdata or SDS.

Moreover, the latitude and the longitude information on a center and four corners are stored in attribute information of the map projected brightness temperature.

2. Data Explanation

This chapter shows explanation of each data item of AMSR-E level 1B Map product excluding common items for level 1A product of level 1B product.

2.1. Core metadata

(1) ShortName

The abbreviated name of a product is stored. Please refer to the level 1A product description for the details.

(2) LocalGranuleID

ID that according to the granule ID system used at EOC is stored. The granule ID of AMSR-E level 1B Map product is defined by following.

P1AMEYYMMDDPPPMX _ KNLLBCnnREVSnn	
[Scene ID]	
P1	P1 (Fixed: EOS-PM1 Aqua)
AME	AME (Fixed: AMSR-E)
YYMMDD	Date of data acquisition start (UT)
PPP	Path number at the observation start point (001 – 233)
M	M (M: regular process)
X	A or D (Orbit direction, A: Ascending, D: Descending)
[Product ID]	
K	O (Fixed: Order project)
N	0 (Fixed: Spare)
LL	1M (Fixed: for level 1B Map)
B	Mapping method (E: Equirectangular; M: Mercator; P: Polar Stereo)
Cnn	Standard Latitude (C00: Scene Center; D00: Standard Latitude; Snn: Latitude in the south; Nnn: Latitude in the north)
R	N (Fixed: re-sampling method, Nearest Neighbor)
E	W (Fixed: Earth ellipse model, WGS84)
V	T (Fixed: Map direction, True North)
Snn	Center Latitude (S90 – N90)

(3) ProcessingLevelID

The processing level is stored. Please refer to the level 1A product description for the details.

(4) GringPointLatitude1, GringPointLongitude1 – GringPointLatitude4, GringPointLongitude4

The latitude and longitude of the four corners corresponding to the map-projected image of 89 GHz are stored. They are set as a counterclockwise from the upper left, as shown in Figure 2.1-1.

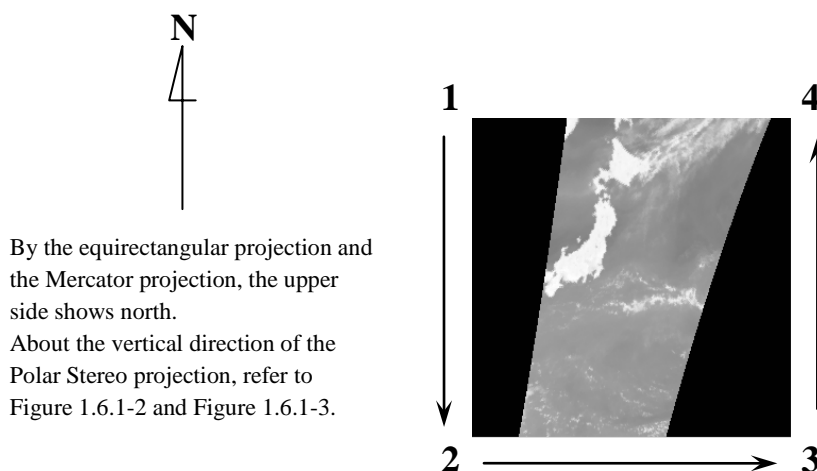


Figure 2.1-1 the order of GringPoint

(5) PGEName

The product generation software name is stored. Please refer to the level 1A product description for the details.

(6) AutomaticQAFlag

The automatic inspection result of data processing is stored. The items of the automatic inspections are shown in the attribute “AutomaticQAFlagExplanation”. And the following value is stored. Automatic inspection in level 1B Map processing is the check results of calculation anomaly about the map projection and the quality information of brightness temperature. The inspection result and the setting value of the product are the correspondence shown below.

PASS	Good	(When all check items are in the state of 'OK'.)
FAIL	Poor	(When some check items are in the state of 'NG'.)
FAIL	NG	(When all check items are in the state of 'NG'.)

(7) AutomaticQAFlagExplanation

The contents of automatic inspection for level 1B Map processing and its thresholds are stored.

1.ProcessedAnomalyQA:Less than 20 is available->OK, 2.InputAnomalyQA:Less than 20 is available->OK, All items are OK, 'PASS' is employed
--

2.2. Product metadata

(1) MapProjectionMethod

One of the following 3 kinds of mapping methods is stored.

EquivalentLongitude/Latitude	Equirectangular	projection
Mercator projection	The Mercator	
Polar Stereo projection	The Polar Stereo	

(2) ResamplingMethod

The nearest neighbor method “NN” is stored for AMSR-E mapping process.

(3) PixelSpacingExcept89G

The fixed value “10km” is stored except 89GHz as a pixel resolution.

(4) PixelSpacingFor89G

The fixed value “5km” is stored for 89GHz as a pixel resolution.

(5) ImageSizeExcept89G (Pixel)

The fixed value “300” pixels are stored except 89GHz as an image size.

(6) ImageSizeExcept89G (Line)

The fixed value “300” lines are stored except 89GHz as an image size.

(7) ImageSizeFor89G (Pixel)

The fixed value “300” pixels are stored for 89GHz as an image size.

(8) ImageSizeFor89G (Line)

The fixed value “300” lines are stored for 89GHz as an image size.

2.3. Explanation of Each Data

(1) 6GHz-V Brightness Temperature

The observation brightness temperature of 6 GHz vertical polarization after map projection is stored.

* In the attribute information of observation brightness temperature after map projection, the following information is stored. This is applied for all frequencies and polarizations. The latitude and longitude of the center and four corners of each frequency are the corrected value with the co-registration parameter (CoRegistrationParmeterA1/A2). Therefore the registration gap between frequencies arises, since map projection is performed on the basis of 89 GHz.

Scaling Factor	0.1 (This item is the same in all frequencies)
Unit	K
Center Latitude/Longitude	latitude, longitude of the center position [deg]
Upper Left Latitude/Longitude	latitude, longitude of the upper left position [deg]
Lower Left Latitude/Longitude	latitude, longitude of the lower left position [deg]
Upper Right Latitude/Longitude	latitude, longitude of the upper right position [deg]
Lower Right Latitude/Longitude	latitude, longitude of the lower right position [deg]

* The following value is stored for the abnormal observation data. This is applied for all frequencies and polarizations.

0	Outside of the observation range
-9999	Deficit data value
-32768	The parity error value
The others, negative value	The anomaly value over the limit range

(2) 6GHz-H Brightness Temperature

The observation brightness temperature of 6 GHz horizontal polarization after map projection is stored.

(3) 10.65GHz-V Brightness Temperature

The observation brightness temperature of 10.65 GHz vertical polarization after map projection is stored.

(4) 10.65GHz-H Brightness Temperature

The observation brightness temperature of 10.65 GHz horizontal polarization after map projection is stored.

(5) 18.7GHz-V Brightness Temperature

The observation brightness temperature of 18.7 GHz vertical polarization after map projection is stored.

(6) 18.7GHz-H Brightness Temperature

The observation brightness temperature of 18.7 GHz horizontal polarization after map projection is stored.

(7) 23.8GHz-V Brightness Temperature

The observation brightness temperature of 23.8 GHz vertical polarization after map projection is stored.

(8) 23.8GHz-H Brightness Temperature

The observation brightness temperature of 23.8 GHz horizontal polarization after map projection is stored.

(9) 36.5GHz-V Brightness Temperature

The observation brightness temperature of 36.5 GHz vertical polarization after map projection is stored.

(10) 36.5GHz-H Brightness Temperature

The observation brightness temperature of 36.5 GHz horizontal polarization after map projection is stored.

(11) 50.3GHz-V Brightness Temperature

In AMSR-E, since 50.3 GHz vertical polarization is not observed, it is filled with 0.

(12) 52.8GHz-V Brightness Temperature

In AMSR-E, since 52.8 GHz vertical polarization is not observed, it is filled with 0.

(13) 89.0GHz-V Brightness Temperature

The observation brightness temperature of 89.0 GHz vertical polarization after map projection is stored.

(14) 89.0GHz-H Brightness Temperature

The observation brightness temperature of 89.0 GHz horizontal polarization after map projection is stored.

(15) Sun Azimuth

The sun azimuth angle in each pixel after map projection is stored. (Please refer to the level 1A product description for the details in subsequent items).

(16) Sun Elevation

The sun elevation angle in each pixel after map projection is stored.

(17) Earth Incidence

The earth incidence angle in each pixel after map projection is stored.

(18) Earth Azimuth

The earth azimuth angle in each pixel after map projection is stored.

(19) Land/Ocean Flag

The land coverage percentage of the observation footprint of AMSR-E is stored for each frequency.

(20) Data Quality Except 89G

The data quality is stored for every pixel in the map projected observation brightness temperature except 89GHz. Each bit of data quality is set 0 for normal and 1 for abnormal (Figure. 2.3-1).

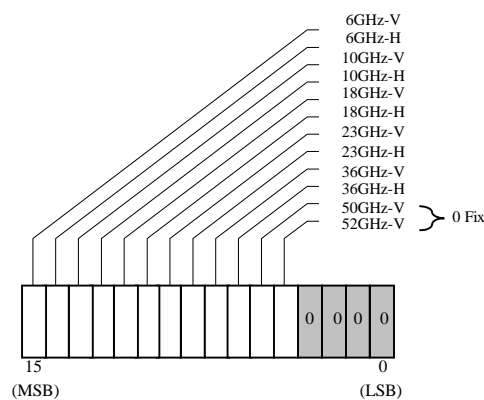


Figure 2.3-1 Details of the quality information

(21) Data Quality For 89G

The data quality is stored for every pixel in the map projected observation brightness temperature of 89GHz. Each bit of the data quality is set 0 for normal and 1 for abnormal (Figure. 2.3-2).

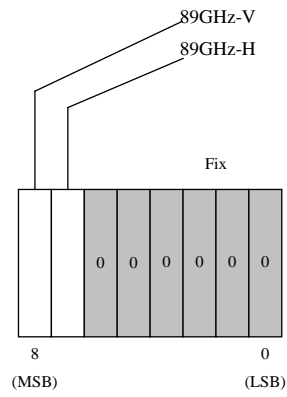


Figure 2.3-2 Details of the quality information