



# MODIS/Aqua Sea Ice Extent Daily L3 Global 1km EASE-Grid Night, Version 61

---

## USER GUIDE

### How to Cite These Data

As a condition of using these data, you must include a citation:

Hall, D. K. and G. Riggs. 2021. *MODIS/Aqua Sea Ice Extent Daily L3 Global 1km EASE-Grid Night, Version 61*. [Indicate subset used]. Boulder, Colorado USA. NASA National Snow and Ice Data Center Distributed Active Archive Center. <https://doi.org/10.5067/MODIS/MYD29P1N.061>. [Date Accessed].

FOR QUESTIONS ABOUT THESE DATA, CONTACT [NSIDC@NSIDC.ORG](mailto:NSIDC@NSIDC.ORG)

FOR CURRENT INFORMATION, VISIT <https://nsidc.org/data/MYD29P1N>



National Snow and Ice Data Center

# TABLE OF CONTENTS

1	DATA DESCRIPTION.....	2
1.1	Parameters .....	2
1.2	Sample Image.....	3
1.3	File Information .....	3
1.3.1	File Format .....	3
1.3.2	File Contents .....	3
1.3.3	Ancillary Files .....	4
1.3.4	Naming Convention.....	4
1.4	Spatial Information .....	5
1.4.1	Coverage.....	5
1.4.2	Projection.....	5
1.4.3	Grid.....	5
1.4.4	Resolution.....	6
1.4.5	Geolocation .....	6
1.5	Temporal Information .....	7
1.5.1	Coverage.....	7
1.5.2	Resolution.....	7
2	DATA ACQUISITION AND PROCESSING .....	7
2.1.1	Acquisition .....	7
2.1.2	Sources .....	7
2.1.3	Processing.....	8
2.2	Quality Information.....	8
2.3	Errors .....	8
2.4	Instrumentation .....	9
2.4.1	Description.....	9
2.4.2	Calibration .....	10
3	SOFTWARE AND TOOLS.....	10
4	RELATED WEBSITES.....	10
5	CONTACTS AND ACKNOWLEDGMENTS.....	11
6	REFERENCES .....	11
7	DOCUMENT INFORMATION.....	12
7.1	Publication Date .....	12
7.2	Date Last Updated .....	12

# 1 DATA DESCRIPTION

This data set provides nighttime ice surface temperature (IST) mapped into 10° by 10° tiles at a resolution of 1 km for Northern and Southern Hemispheres grids. The Scientific Data Sets (SDS) included in this product are listed in Table 1.

The terms "Version 61" and "Collection 6.1" are used interchangeably in reference to this release of MODIS data.

## 1.1 Parameters

Table 1. SDS Details

Parameter	Description	Values
Ice_Surface_Temperature	<p>IST is stored as calibrated data (scaled integers). Use the equation below to convert to K:  <math>IST = scale\_factor * (calibrated\_data - add\_offset)</math>                      where <math>scale\_factor = 0.01</math>                      and <math>add\_offset = 0.0</math>.<sup>1</sup>                      The valid range for ISTs is 210 K to 313.20 K.</p>	<p>0.0: missing                      1.0: no decision                      11.0: night                      25.0: land                      37.0: inland water                      39.0: open ocean                      50.0: cloud                      243-273: expected range of IST calibrated data values                      655.35: fill</p>
Ice_Surface_Temperature_Spatial_QA	<p>QA data corresponding to the observation selected as the IST observation of the night.</p>	<p>0: good quality                      1: other quality                      253: land mask                      254: ocean mask                      255: fill</p>
<p><sup>1</sup> Values for <math>scale\_factor</math> and <math>add\_offset</math> are also stored as Local Attributes with the IST SDSs</p>		

## 1.2 Sample Image

---

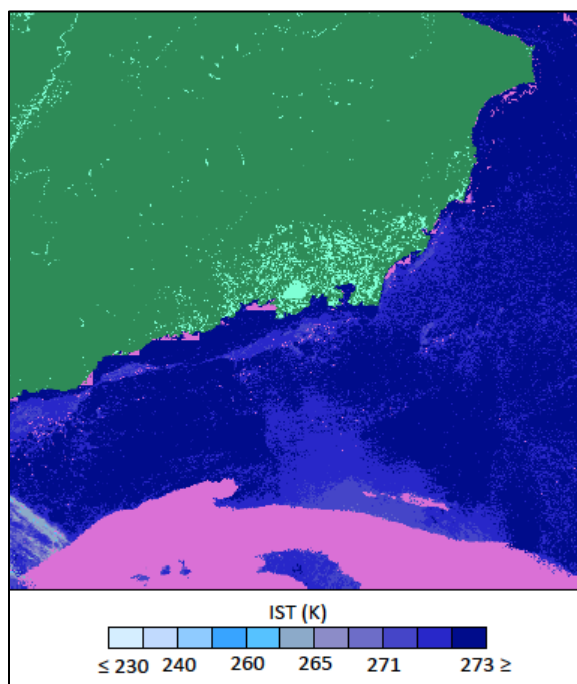


Figure 1. This figure shows 1 km IST for the Chukchi Sea, acquired on 23 Feb 2015, from MOD29P1D tile h08v07. This sample image shows daytime IST but provides a representative sample of the nighttime IST from MOD29P1N.

## 1.3 File Information

---

### 1.3.1 File Format

Data are provided in HDF-EOS2 format and are stored as 8-bit unsigned integers. For software and more information, visit the [HDF-EOS](http://hdfEOS.org) website.

### 1.3.2 File Contents

As shown in Figure 2, each data file includes one data fields (Ice\_Surface\_Temperature), one data quality fields (Ice\_Surface\_Temperature\_Spatial\_QA), and three metadata fields (ArchiveMetadata.0, CoreMetadata.0, and StructMetadata.0).

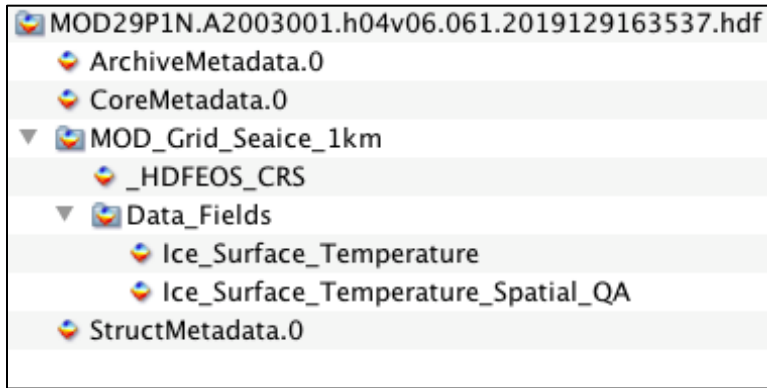


Figure 2. This figure shows the MOD29P1N fields included in each data file as displayed with Panoply software.

### 1.3.3 Ancillary Files

A browse image file (.jpg) and metadata file (.xml) are provided with each data file.

### 1.3.4 Naming Convention

Files are named according to the following convention and as described in Table 2.

**File naming convention:**

MYD[PID].A[YYYY][DDD].[hNN][vNN].[VVV].[yyyy][ddd][hhmmss].hdf

Table 2. File Name Variables

MYD	MODIS/Aqua
PID	Product ID
A	Acquisition date follows
YYYY	Acquisition year
DDD	Acquisition day of year
hNN, vNN	Horizontal tile number, vertical tile number
VVV	Version (Collection) number
yyyy	Production year
ddd	Production day of year
hhmmss	Production hour/minute/second in GMT
.hdf	HDF-EOS formatted data file

**File name example:**

MYD29P1N.A2003001.h04v06.061.2019129163537.hdf

**Note:** Data files contain important metadata, including global attributes that are assigned to the file and local attributes like coded integer keys that provide details about the data fields. In addition, each HDF-EOS data file has a corresponding XML metadata file (.xml), which contains some of the same internal metadata as the HDF-EOS file plus additional information regarding user support, archiving, and granule-specific post-production. Refer to the [MODIS Sea Ice Products User Guide to Collection 6.1](#) for additional information.

## 1.4 Spatial Information

---

### 1.4.1 Coverage

Coverage is global. Aqua's sun-synchronous, near-polar circular orbit is timed to cross the equator from south to north (ascending node) at approximately 1:30 p.m. local time. Complete global coverage occurs every one to two days (more frequently near the poles). The following sites offer tools that track and predict Aqua's orbital path:

- [Daily Aqua Orbit Tracks](#), Space Science and Engineering Center, University of Wisconsin-Madison
- [NASA LaRC Satellite Overpass Predictor](#) (includes viewing zenith, solar zenith, and ground track distance to specified lat/lon)

### 1.4.2 Projection

Lambert Azimuthal equal area EASE-GRID projection.

### 1.4.3 Grid

Data files are provided as 10° by 10° tiles of data gridded in the original EASE-Grid Lambert Azimuthal Equal Area map projection. Tiles contain 951 rows by 951 columns. The global tile grid is partitioned into separate Northern Hemisphere and Southern Hemisphere polar grids, with half of the tiles (313) in the Northern Hemisphere and half in the Southern Hemisphere. The coordinate system, designated by (horizontal, vertical) ordered pairs, starts with (h00,v00) in the upper left corner of the northern grid and proceeds rightward (horizontal) and downward (vertical) to tile (h18, v18) in the bottom right corner. The southern grid begins where the northern grid ends, with tile (h00,v20) in the upper left corner and tile (v18,h38) in the lower right corner.

See the [EASE-Grid Tile Locations and Bounding Coordinates for MODIS Sea Ice Products](#) technical reference for additional grid information. The [MODIS MODLAND Tile Calculator](#) can be used to convert geographic coordinates to tile/image coordinates (and vice-versa).

## 1.4.4 Resolution

The gridded resolution is approximately 1 km.

## 1.4.5 Geolocation

Table 3 and Table 4 provide information for geolocation information for this data set.

Table 3. Projection Details

Region	Northern Hemisphere	Southern Hemisphere
<b>Geographic coordinate system</b>	N/A	N/A
<b>Projected coordinate system</b>	NSIDC EASE-Grid North	NSIDC EASE-Grid South
<b>Longitude of true origin</b>	0°	0°
<b>Latitude of true origin</b>	90°	-90°
<b>Scale factor at longitude of true origin</b>	N/A	N/A
<b>Datum</b>	N/A	N/A
<b>Ellipsoid/spheroid</b>	International 1924 Authalic Sphere	International 1924 Authalic Sphere
<b>Units</b>	Meter	Meter
<b>False easting</b>	0°	0°
<b>False northing</b>	0°	0°
<b>EPSG code</b>	3408	3409
<b>PROJ4 string</b>	+proj=laea +lat_0=90 +lon_0=0 +x_0=0 +y_0=0 +a=6371228 +b=6371228 +units=m +no_defs	+proj=laea +lat_0=-90 +lon_0=0 +x_0=0 +y_0=0 +a=6371228 +b=6371228 +units=m +no_defs
<b>Reference</b>	<a href="http://epsg.io/3408">http://epsg.io/3408</a>	<a href="http://epsg.io/3409">http://epsg.io/3409</a>

Table 4. Grid Details

Region	Northern Hemisphere	Southern Hemisphere
<b>Grid cell size (x, y pixel dimensions)</b>	1 km	1 km
<b>Number of rows</b>	951	951
<b>Number of columns</b>	951	951
<b>Nominal gridded resolution</b>	1 km	1 km
<b>Grid rotation</b>	N/A	N/A
<b>Geolocated upper left point (m)</b>	-9058902.1845(x), 9058902.1845(y)	-9058902.1845(x), 9058902.1845(y)
<b>Geolocated lower right point (m)</b>	9058902.1845(x), -9058902.1845(y)	9058902.1845(x), -9058902.1845(y)

## 1.5 Temporal Information

---

### 1.5.1 Coverage

The temporal coverage of this data set extends from 4 July 2002 to the present. During the Aqua mission a number of anomalies have resulted in minor data outages. If you cannot locate data for a particular date or time, check the [MODIS/Aqua Data Outages](#) web page.

### 1.5.2 Resolution

Daily

## 2 DATA ACQUISITION AND PROCESSING

### 2.1.1 Acquisition

MODIS scans the entire globe every one to two days. As such, most locations on Earth are imaged at least once per day and more frequently where swaths overlap, such as near the poles. Aqua's sun-synchronous, near-circular polar orbit is timed to cross the equator from south to north (ascending node) at approximately 1:30 p.m. local time.

#### **Ongoing changes in the Aqua orbit**

The Aqua flight operations team completed [mission maneuvers](#) related to maintaining a 1:30 PM MLT equator crossing and 705 km orbit altitude on March 18, 2021. In July 2021, Aqua began drifting to a later MLT. In January 2022, Aqua will begin its constellation exit by stopping all maneuvers except collision avoidance maneuvers and will exceed a 1:45 PM MLT crossing in February 2023. MLT will continue to drift after this, reaching 3:50 PM around August 2026. Aqua MODIS will remain operational and generate the full suite of products until the end of the mission in August 2026.

Later crossing times for an afternoon platform like Aqua mean lower solar elevations leading to more prevalent shadows. This decrease in orbit altitude alters the spatial coverage of the sensor including possible gaps in spatial sampling, decreased spatial coverage, and higher spatial resolution. Products are mostly expected to be science quality except for reduced grid size (from lower altitude) and without a strict 16-day repeat of observations (from drift and changing orbit).

Details on the impact of the Constellation Exit on the quality of the product are being compiled and [will be posted when available](#).

### 2.1.2 Sources

This level-3 data set is generated from the *MODIS/Aqua Sea Ice Extent Daily L2G Global 1km EASE-Grid Night* (MYD29PGN) product (which is an intermediate product, neither retained nor distributed by NSIDC). MYD29PGN is generated by mapping all MYD29 swaths, acquired in night mode, for a calendar day, to grid cells of the Lambert Azimuthal Equal-Area (polar grid) projection,



EASE-Grid. Grids are generated for both the Northern and Southern Hemispheres, with each grid containing 313 tiles, consisting of approximately 10 x 10 degrees of coverage. Table 5 lists the MODIS C6.1 products that are used as inputs to the MODIS daily sea ice algorithm.

Table 5. Inputs to the MODIS snow algorithm

Product ID	Long Name	Data Used
MYD29PGN	MODIS/Aqua Sea Ice Extent Daily L2G Global 1km EASE-Grid Night	IST and QA
MYDPTPGN	MODIS/Aqua Observation Pointers Daily L2G Global 1km Polar Grid Night	Number of observations and coverage observation swath and location

### 2.1.3 Processing

The MYD29PGN product contains multiple MYD29 swath observations mapped into each grid cell. The daily IST algorithm uses a scoring process to select the 'best' observation of the day from each MYD29PGN grid cell based on observations acquired nearest nadir and with the largest amount of coverage in the grid cell. The scoring process weights the 'best' observation criteria as follows:

$$score = (0.5 * solar\ elevation) + (0.3 * observation\ coverage) + (0.2 * distance\ from\ nadir)$$

These data are read from the Level 2 sea ice (MYD29PGN) and pointer (MYDPTPGN) products. All input observations are scored and the one with the highest score is selected as the observation of the night.

For a detailed description of the MODIS sea ice detection algorithm, see the Algorithm Theoretical Basis Document (Hall et al., 2001).

## 2.2 Quality Information

---

Quality assurance (QA) data is inherited from the MYD29 IST input. No QA assessment is performed by the IST algorithm.

## 2.3 Errors

---

Cloud contamination can cause substantial IST error compared to clear sky conditions. Note: In the polar regions when there is 24 hours of daylight there is no IST data in the product; all the data is mapped into the MYD29P1D product. The extent of IST coverage in a tile expands and contracts with the length of daylight over polar regions.

## 2.4 Instrumentation

### 2.4.1 Description

The MODIS instrument provides 12-bit radiometric sensitivity in 36 spectral bands ranging in wavelength from 0.4  $\mu\text{m}$  to 14.4  $\mu\text{m}$ . Two bands are imaged at a nominal resolution of 250 m at nadir, five bands at 500 m, and the remaining bands at 1000 m. A  $\pm 55$  degree scanning pattern at an altitude of 705 km achieves a 2330 km swath with global coverage every one to two days.

The scan mirror assembly uses a continuously rotating, double-sided scan mirror to scan  $\pm 55$  degrees and is driven by a motor encoder built to operate 100 percent of the time throughout the six-year instrument design life. The optical system consists of a two-mirror, off-axis afocal telescope which directs energy to five refractive objective assemblies, one each for the visible, near-infrared, shortwave infrared, middle-wavelength infrared, and long-wavelength infrared spectral regions.

The MODIS instruments on the Terra and Aqua space vehicles were built to NASA specifications by Santa Barbara Remote Sensing, a division of Raytheon Electronics Systems. Table 6 contains the instruments' technical specifications:

Table 6. MODIS Technical Specifications

Variable	Description
Orbit	705 km altitude, 1:30 p.m. ascending node (Aqua), sun-synchronous, near-polar, circular
Scan Rate	20.3 rpm, cross track
Swath Dimensions	2330 km (cross track) by 10 km (along track at nadir)
Telescope	17.78 cm diameter off-axis, afocal (collimated) with intermediate field stop
Size	1.0 m x 1.6 m x 1.0 m
Weight	228.7 kg
Power	162.5 W (single orbit average)
Data Rate	10.6 Mbps (peak daytime); 6.1 Mbps (orbital average)
Quantization	12 bits
Spatial Resolution	250 m (bands 1-2) 500 m (bands 3-7) 1000 m (bands 8-36)
Design Life	6 years

## 2.4.2 Calibration

MODIS has a series of on-board calibrators that provide radiometric, spectral, and spatial calibration of the MODIS instrument. The blackbody calibrator is the primary calibration source for thermal bands between 3.5  $\mu\text{m}$  and 14.4  $\mu\text{m}$ , while the Solar Diffuser (SD) provides a diffuse, solar-illuminated calibration source for visible, near-infrared, and short wave infrared bands. The Solar Diffuser Stability Monitor tracks changes in the reflectance of the SD with reference to the sun so that potential instrument changes are not incorrectly attributed to changes in this calibration source. The Spectroradiometric Calibration Assembly provides additional spectral, radiometric, and spatial calibration.

MODIS uses the moon as an additional calibration technique and for tracking degradation of the SD by referencing the illumination of the moon since the moon's brightness is approximately the same as that of the Earth. Finally, MODIS deep space views provide a photon input signal of zero, which is used as a point of reference for calibration.

For additional details about the MODIS instruments, see NASA's [MODIS | About](#) Web page.

## 3 SOFTWARE AND TOOLS

The following sites can help you identify the right MODIS data for your study:

- [NASA's Earth Observing System Data and Information System | Near Real-Time Data](#)
- [NASA Goddard Space Flight Center | MODIS Land Global Browse Images](#)

The following resources are available to help users work with MODIS data:

- [The HDF-EOS to GeoTIFF Conversion Tool \(HEG\)](#) can reformat, re-project, and perform stitching/mosaicing and subsetting operations on HDF-EOS objects.
- [HDFView](#) is a simple, visual interface for opening, inspecting, and editing HDF files. Users can view file hierarchy in a tree structure, modify the contents of a data set, add, delete and modify attributes, and create new files.
- [What is HDF-EOS? an NSIDC FAQ](#)
- [The MODIS Conversion Toolkit \(MCTK\) plug-in for ENVI](#) can ingest, process, and georeference every known MODIS data set, including products distributed with EASE-Grid projections. The toolkit includes support for swath projection and grid reprojection and comes with an API for large batch processing jobs.

## 4 RELATED WEBSITES

The following resources provide additional information about MODIS Version 6.1 data, including known problems, production schedules, and future plans:

- [The MODIS Snow and Sea Ice Global Mapping Project](#)
- [NASA LDOPE | MODIS/VIIRS Land Product Quality Assessment](#)
- [MODIS Land Team Validation | Status for Snow Cover/Sea Ice \(MOD10/29\)](#)

## 5 CONTACTS AND ACKNOWLEDGMENTS

### **George Riggs**

NASA Goddard Space Flight Center (GSFC)  
Greenbelt, MD

### **Dorothy Hall**

ESSIC / University of Maryland  
College Park, MD

### **Miguel Roman**

NASA Goddard Space Flight Center (GSFC)  
Greenbelt, MD

## 6 REFERENCES

Hall, D.K., Riggs, G.A. and Salomonson, V.V. 2001. Algorithm Theoretical Basis Document (ATBD) for MODIS Snow and Sea Ice-Mapping Algorithms. [Guide](#). NASA Goddard Space Flight Center, Greenbelt, MD.

Hall, D.K., J.R. Key, K.A. Casey, G.A. Riggs, and D.J. Cavalieri. 2004. Sea Ice Surface Temperature Product From MODIS. *IEEE Transactions on Geoscience and Remote Sensing*, 42(5): 1076-1087. <https://doi.org/10.1109/TGRS.2004.825587>.

Key, J. R., J. B. Collins, C. Fowler, and R.S. Stone. 1997. High latitude surface temperature estimates from thermal satellite data. *Remote Sensing of the Environment*, 61(2): 302-309. [https://doi.org/10.1016/S0034-4257\(97\)89497-7](https://doi.org/10.1016/S0034-4257(97)89497-7).

Lin, G., Wolfe, R.E., Zhang, P., Tilton, J.C., Dellomo, J.J. and Bin Tan. 2019. Thirty-six combined years of MODIS geolocation trending. *Proc. SPIE 11127*, Earth Observing Systems XXIV, 1112715. <http://dx.doi.org/10.1117/12.826598>.

Masuoka, E., A. Fleig, R.E. Wolfe, and F. Patt. 1998. Key characteristics of MODIS data products. *IEEE Transactions on Geoscience and Remote Sensing* 36(4): 1313-1323. <https://dx.doi.org/10.1109/36.701081>

Riggs, G.A. and D.K. Hall. 2015. MODIS Sea Ice Products User Guide to Collection 6.1. NASA Goddard Space Flight Center, Greenbelt, MD. (See [PDF](#))

Scambos, T.A., T.M. Haran, and R. Massom. 2006. Validation of AVHRR and MODIS ice surface temperature products using in situ radiometers. *Annals of Glaciology*, 44:345-351.

Shuman, C.A., D.K. Hall, N.E. DiGirolamo, T.K. Mefford, and M.J. Schnaubelt. 2014. Comparison of near-surface air temperatures and MODIS ice-surface temperatures at Summit, Greenland (2008-2013). *Journal of Applied Meteorology and Climatology*, 53(9):2171-2180.

<http://dx.doi.org/10.1175/JAMC-D-14-0023.1>

## 7 DOCUMENT INFORMATION

### 7.1 Publication Date

---

March 2021

### 7.2 Date Last Updated

---

December 2021