



# ATLAS/ICESat-2 L3A Inland Water Surface Height, Version 1

---

## USER GUIDE

### How to Cite These Data

As a condition of using these data, you must include a citation:

Jasinski, M. F., J. D. Stoll, D. Hancock, J. Robbins, J. Nattala, J. Morison, B. M. Jones, M. E. Ondrusek, T. M. Pavelsky, C. Parrish, and the ICESat-2 Science Team. 2019. *ATLAS/ICESat-2 L3A Inland Water Surface Height, Version 2*. [Indicate subset used]. Boulder, Colorado USA. NASA National Snow and Ice Data Center Distributed Active Archive Center.  
doi: <https://doi.org/10.5067/ATLAS/ATL13.002>. [Date Accessed].

FOR QUESTIONS ABOUT THESE DATA, CONTACT [NSIDC@NSIDC.ORG](mailto:NSIDC@NSIDC.ORG)

FOR CURRENT INFORMATION, VISIT <https://nsidc.org/data/ATL13>



National Snow and Ice Data Center

# TABLE OF CONTENTS

1	DATA DESCRIPTION .....	2
1.1	Parameters.....	2
1.2	File Information.....	2
1.2.1	Format.....	2
1.2.2	ATLAS/ICESat-2 Description.....	2
1.2.3	File Contents.....	4
1.2.4	Data Groups.....	5
1.2.5	Naming Convention .....	6
1.2.6	Browse File .....	7
1.2.7	File Size .....	7
1.3	Spatial Information .....	7
1.3.1	Coverage .....	7
1.3.2	Resolution.....	8
1.3.3	Geolocation.....	8
1.4	Temporal Information .....	9
1.4.1	Coverage .....	9
1.4.2	Resolution.....	9
2	DATA ACQUISITION AND PROCESSING.....	9
2.1	Background.....	9
2.2	Acquisition.....	10
2.3	Processing.....	11
2.3.1	Water Masks.....	11
2.3.2	Surface Height Algorithm.....	12
2.3.3	Inland Water Backscatter.....	13
2.3.4	Water Surface Height.....	13
2.3.5	ATLAS Instrument Response Function.....	13
3	QUALITY, ERRORS, AND LIMITATIONS .....	13
4	VERSION HISTORY .....	13
5	CONTACTS AND ACKNOWLEDGMENTS .....	14
6	DOCUMENT INFORMATION.....	15
6.1	Publication Date .....	15
6.2	Date Last Updated .....	15

# 1 DATA DESCRIPTION

## 1.1 Parameters

---

Along-track water surface heights for inland water bodies plus statistics. Water bodies include lakes, reservoirs, bays, and estuaries, plus a 7 km, near-shore buffer. Water surface heights are provided as both height above the WGS 84 ellipsoid (ITRF2014 Reference Frame) and height above the Earth Gravitational Model 2008 (EGM2008) mean sea level (MSL). Statistics include along-track surface slope (where data permit), mean and standard deviation, subsurface 532 nm attenuation, wave height, and coarse depth to bottom topography.

## 1.2 File Information

---

### 1.2.1 Format

Data are provided as HDF5 formatted files. HDF is a data model, library, and file format designed specifically for storing and managing data. For more information about HDF, visit the [HDF Support Portal](#).

The HDF Group provides tools for working with HDF5 formatted data. HDFView is free software that allows users to view and edit HDF formatted data files. In addition, the [HDF - EOS | Tools and Information Center](#) web page contains code examples in Python (pyhdf/h5py), NCL, MATLAB, and IDL for accessing and visualizing ICESat-2 files.

### 1.2.2 ATLAS/ICESat-2 Description

The following brief description of the Ice, Cloud and land Elevation Satellite-2 (ICESat-2) observatory and Advanced Topographic Laser Altimeter System (ATLAS) instrument is provided to help users better understand the file naming conventions, internal structure of data files, and other details referenced by this user guide. The ATL13 data product is described in detail in the Ice, Cloud, and land Elevation Satellite-2 Project Algorithm Theoretical Basis Document (ATBD) for Inland Water Data Products (ATBD for ATL13). To obtain the most recent version of this ATBD, visit the [NASA Goddard Space Flight Center's ICESat-2 Data Products web page](#).

The ATLAS instrument and ICESat-2 observatory utilize a photon-counting lidar and ancillary systems (GPS and star cameras) to measure the time a photon takes to travel from ATLAS to Earth and back again and to determine the photon's geodetic latitude and longitude. Laser pulses from ATLAS illuminate three left/right pairs of spots on the surface that trace out six approximately 14 m wide ground tracks as ICESat-2 orbits Earth. Each ground track is numbered according to the laser spot number that generates it, with ground track 1L (GT1L) on the far left and ground track 3R (GT3R) on the far right. Left/right spots within each pair are approximately 90 m apart in the

across-track direction and 2.5 km in the along-track direction. The ATL13 data product is organized by ground track, with ground tracks 1L and 1R forming pair one, ground tracks 2L and 2R forming pair two, and ground tracks 3L and 3R forming pair three. Each pair also has a Pair Track—an imaginary line halfway between the actual location of the left and right beams (see figures 1 and 2). Pair tracks are approximately 3 km apart in the across-track direction.

The beams within each pair have different transmit energies—so-called weak and strong beams—with an energy ratio between them of approximately 1:4. The mapping between the strong and weak beams of ATLAS, and their relative position on the ground, depends on the orientation (yaw) of the ICESat-2 observatory, which is changed approximately twice per year to maximize solar illumination of the solar panels. The forward orientation corresponds to ATLAS traveling along the +x coordinate in the ATLAS instrument reference frame (see Figure 1). In this orientation, the weak beams lead the strong beams and a weak beam is on the left edge of the beam pattern. In the backward orientation, ATLAS travels along the -x coordinate, in the instrument reference frame, with the strong beams leading the weak beams and a strong beam on the left edge of the beam pattern (see Figure 2). The first yaw flip was performed on December 28, 2018, placing the spacecraft into the backward orientation. ATL08 reports the spacecraft orientation in the `sc_orient` parameter stored in the `/orbit_info/` data group (see Section 1.2.4 Data Groups).

The Reference Ground Track (RGT) refers to the imaginary track on Earth at which a specified unit vector within the observatory is pointed. Onboard software aims the laser beams so that the RGT is always between ground tracks 2L and 2R (i.e. coincident with Pair Track 2). The ICESat-2 mission acquires data along 1,387 different RGTs. Each RGT is targeted in the polar regions once every 91 days (i.e. the satellite has a 91-day repeat cycle) to allow elevation changes to be detected. Cycle numbers track the number of 91-day periods that have elapsed since the ICESat-2 observatory entered the science orbit. RGTs are uniquely identified, for example in ATL08 file names, by appending the two-digit cycle number (cc) to the RGT number, e.g. 0001cc to 1387cc.

Under normal operating conditions, no data are collected along the RGT; however, during spacecraft slews, or off-pointing, some ground tracks may intersect the RGT. Off-pointing refers to a series of plans over the mid-latitudes that have been designed to facilitate a global ground and canopy height data product with approximately 2 km track spacing. Once the ATLAS/ICESat-2 Precision Pointing Determination (PPD) and Precision Orbit Determination (POD) solutions have been adequately resolved and the instrument has pointed directly at the reference ground track for a full 91 days (1387 orbits), the observatory will begin off-pointing data acquisition.

Users should note that between 14 October 2018 and 30 March 2019 the spacecraft pointing control was not yet optimized. As such, ICESat-2 data acquired during that time do not lie along the nominal RGTs, but are offset at some distance from the RGTs. Although not along the RGT, the geolocation information for these data is not degraded.

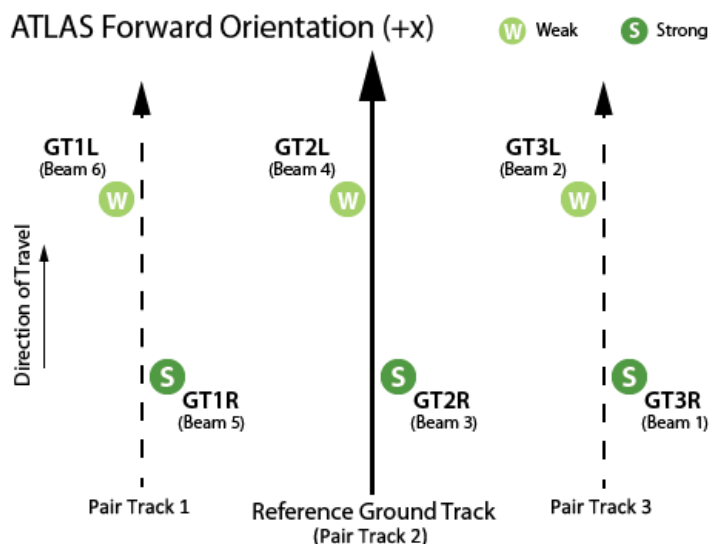


Figure 1. Spot and ground track (GT) naming convention with ATLAS oriented in the forward (instrument coordinate +x) direction.

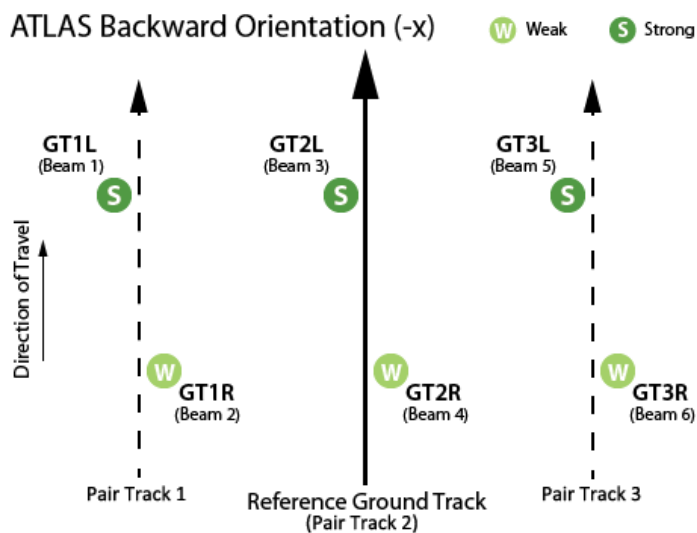


Figure 2. Spot and ground track (GT) naming convention with ATLAS oriented in the backward (instrument coordinate -x) direction.

ICESat-2 reference ground tracks with dates and times can be downloaded as KMZ files from NASA's [ICESat-2 | Technical Specs](#) page, below the Orbit and Coverage table.

### 1.2.3 File Contents

Data files (granules) contain inland water body surface heights acquired during four of ATLAS's 1387 orbits.

## 1.2.4 Data Groups

Within data files, similar variables such as science data, instrument parameters, altimetry data, and metadata are grouped together according to the HDF model. ATL13 data files contain the top-level groups shown in Figure 3:

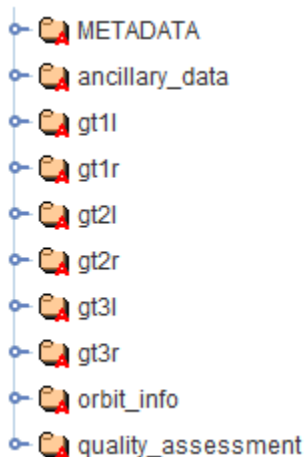


Figure 3. ATL13 data groups shown in HDFView.

The following sections summarize the structure and primary variables of interest in ATL13 data files. For a complete list of parameters, see the [ATL13 Data Dictionary \(v02\)](#).

### 1.2.4.1 METADATA

ISO19115 structured summary metadata for the granule, including content that describes the required geospatial information.

### 1.2.4.2 ancillary\_data

Information that is ancillary to the data product. This may include product and instrument characteristics and/or processing constants.

### 1.2.4.3 gt1l – gt3r

Six ground track groups (gt1l – gt3r) that contain the per-beam data parameters for the specified ATLAS ground track. Parameters of interest include:

- Water surface height (ht\_water\_surf) above the WGS 84 ellipsoid;
- Orthometric surface height (ht\_ortho), i.e. height above the EGM2008 MSL;
- Geoid value at short segment reporting location (segment\_geoid);

- Water body type (inland\_water\_body\_type); size (inland\_water\_body\_size); shape mask source (inland\_water\_body\_source); and water body ID (inland\_water\_body\_id). When concatenated, these four values uniquely identify each water body (See "4.7.1.2 | Water Body Reference Identification Scheme" in the ATBD for ATL13).
- Short segment length flag (qf\_sseg\_length);
- Mean latitude (sseg\_mean\_lat), longitude (sseg\_mean\_lon), and time (sseg\_mean\_time) of short segment signal qualified photons
- Short segment, along-track, water-body surface slope (segment\_slope\_trk\_bdy)

The gt[x] groups also contain a variety of descriptive statistics. The complete contents of the gt[x] groups are listed in "Table 5-1 | ATL13 Output Parameters" in the ATBD for ATL13.

#### 1.2.4.4 orbit\_info

Orbit parameters that are constant for a granule, such as the RGT number and cycle and the spacecraft orientation (sc\_orient).

#### 1.2.4.5 quality\_assessment

Quality assessment data for the granule as a whole, including a pass/fail flag and a failure reason indicator.

### 1.2.5 Naming Convention

Data files utilize the following naming convention:

Example:

ATL13\_20181013205512\_02330101\_002\_01.h5

ATL13\_[yyyymmdd][hhmmss]\_[ttttccss]\_[vvv\_rr].h5

The following table describes the file naming convention variables:

Table 1. File Naming Convention Variables and Descriptions

Variable	Description
ATL13	ATLAS/ICESat-2 L3A Inland Water Surface Height
yyyymmdd	Year, month, and day of data acquisition
hhmmss	Data acquisition start time, hour, minute, and second (UTC)
tttt	Four digit RGT number of the first of four tracks in the granule. The ICESat-2 mission has 1,387 RGTs, numbered from 0001 to 1387.

Variable	Description
cc	Cycle Number. The cycle number tracks the number of 91-day periods that have elapsed since ICESat-2 entered the science orbit.
ss	Segment number. Not used for ATL13. Always 01. <sup>1</sup>
vvv_rr	Version and revision number. <sup>2</sup>

<sup>1</sup>Some ATLAS/ICESat-2 products (e.g. ATL03) are provided as files that span 1/14<sup>th</sup> of an orbit. As such, these products' file names specify a segment number that ranges from from 01 to 14. Because ATL13 data files span four full orbits, the segment number is always set to 01.

<sup>2</sup>From time to time, NSIDC receives duplicate, reprocessed granules from our data provider. These granules have the same file name as the original (i.e. date, time, ground track, cycle, and segment number), but the revision number has been incremented. Although NSIDC deletes the superceded granule, the process can take several days. As such, if you encounter multiple granules with the same file name, please use the granule with the highest revision number.

Each data file has a corresponding XML file that contains additional file level metadata. XML metadata files have the same name as their corresponding .h5 file, but with .xml appended.

## 1.2.6 Browse File

Browse files are provided as HDF5 formatted files that contain images designed to quickly assess the location and quality of each granule's data. Browse images include water surface orthometric height (named "default1") and granule ground track location and coverage ("default2").

Browse files utilize the same naming convention as their corresponding data file, but with \_BRW appended.

## 1.2.7 File Size

Files range from approximately 1 MB to 10 MB.

## 1.3 Spatial Information

---

### 1.3.1 Coverage

Spatial coverage spans approximately 88° N latitude to 88° S. Water surface height processing is constrained by an inland water mask (see "Processing | Water Masks").



### 1.3.2 Resolution

The ATLAS instrument transmits laser pulses at 10 kHz. At the nominal ICESat-2 orbit altitude of 500 km, this yields approximately one transmitted laser pulse every 0.7 meters along ground tracks. Note, however, that the number of photons that return to the telescope depends on surface reflectivity and cloud cover (which obscures ATLAS's view of Earth). As such, the spatial resolution of individual signal photons varies.

Inland water heights are processed in segments that contain a minimum of approximately 100 signal photons, to ensure the segment accurately characterizes the water surface. As such, the segments vary in length from approximately 30 m to 200 m (averaging about 100 m), depending on factors such as signal quality and water and atmospheric conditions.

### 1.3.3 Geolocation

Latitudes and longitudes refer to the WGS 84 coordinate system. Water surface heights are provided as both heights above the WGS 84 ellipsoid (ITRF2014 Reference Frame) and as heights above mean sea level (EGM2008). The following table contains details about WGS 84:

Table 2. Geolocation Details

<b>Geographic coordinate system</b>	WGS 84
<b>Projected coordinate system</b>	N/A
<b>Longitude of true origin</b>	Prime Meridian, Greenwich
<b>Latitude of true origin</b>	N/A
<b>Scale factor at longitude of true origin</b>	N/A
<b>Datum</b>	World Geodetic System 1984
<b>Ellipsoid/spheroid</b>	WGS 84
<b>Geoid</b>	EGM2008
<b>Units</b>	degrees
<b>False easting</b>	N/A
<b>False northing</b>	N/A
<b>EPSG codes</b>	4326 (WGS 84) 3855 (EGM2008)
<b>PROJ4 string</b>	+proj=longlat +datum=WGS84 +no_defs
<b>Reference</b>	<a href="https://epsg.io/4326">https://epsg.io/4326</a> (WGS 84) <a href="https://epsg.io/3855">https://epsg.io/3855</a> (EGM2008)

For information about ITRF2014, see the International Terrestrial Reference Frame | [ITRF2014 webpage](#).

## 1.4 Temporal Information

---

### 1.4.1 Coverage

13 October 2018 to 09 January 2019

### 1.4.2 Resolution

Repeat observations for any given water body depend on its size and geographic location. The frequency at which ATLAS/ICESat-2 crosses inland water bodies depends on how often the spacecraft's orbital pattern intersects with the water body mask. For high latitude, polar regions (approximately  $\pm 65^\circ$ ), the mission requirements mandate repeat observations every 91 days along the precisely established reference tracks (i.e. the satellite has a 91 day repeat cycle). However, starting with cycle 04 (28 June 2019) ATLAS/ICESat-2 is slated to begin conducting a systematic off-pointing scenario at lower latitudes that is designed to achieve approximately 2 km global spacing after two years of data acquisition.

## 2 DATA ACQUISITION AND PROCESSING

### 2.1 Background

---

The ATL13 product is derived primarily from geolocated, time-tagged photon heights and other parameters passed to it from the ATLAS/ICESat-2 L2A Global Geolocated Photon Data (ATL03) product. The following figure illustrates the family of ICESat-2 data products and the connections between them:

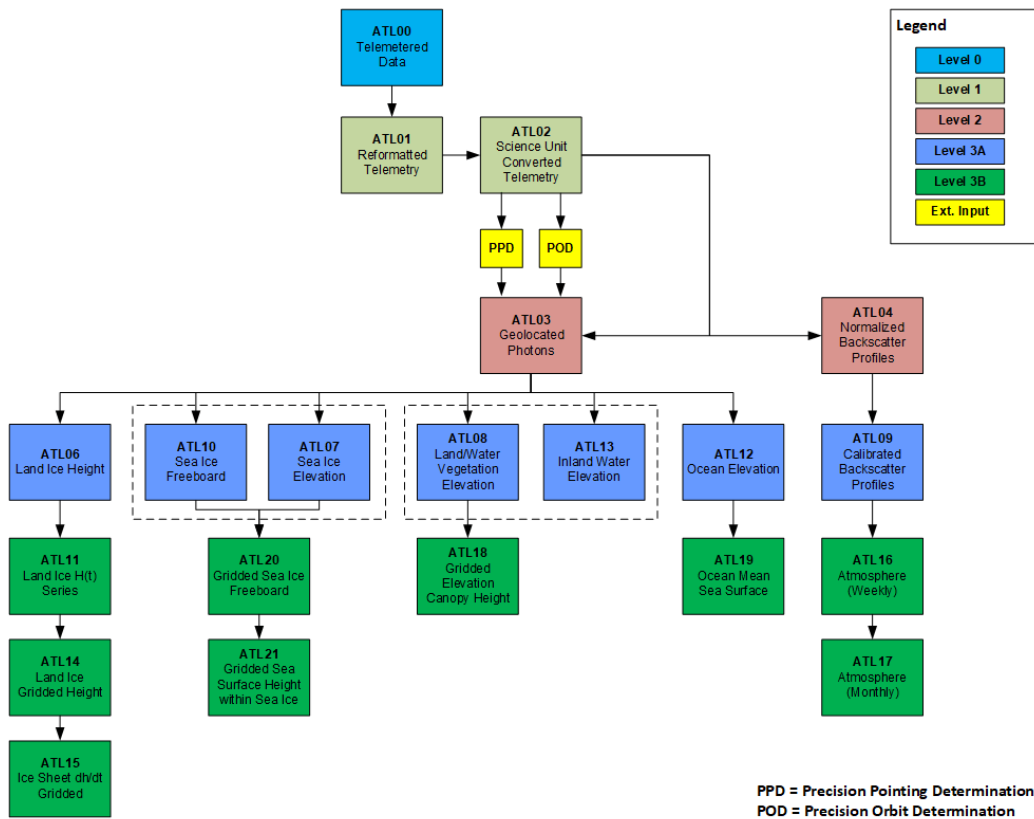


Figure 4. ICESat-2 data processing flow. The ATL01 algorithm reformats and unpacks the Level 0 data and converts it into engineering units. ATL02 processing converts the ATL01 data to science units and applies instrument corrections. The Precision Pointing Determination (PPD) and Precision Orbit Determination (POD) solutions compute the pointing vector and position of the ICESat-2 observatory as a function of time. ATL03 acts as the bridge between the lower level, instrumentation-specific products and the higher-level, surface-specific products.

## 2.2 Acquisition

Inputs from ATL03 product include precise latitude, longitude, and height for every received photon, plus applied geophysical corrections such as Earth tides and atmospheric delays. Each photon is also classified as signal or background and by surface type (land ice, sea ice, land, ocean, and inland water).

The following sections summarize the approach used to generate the ATL13 product. For a complete description of the theory and algorithm, consult the ATBD for ATL13. To obtain the most recent version of this ATBD, visit the NASA Goddard Space Flight Center's ICESat-2 Data Products web page.

## 2.3 Processing

### 2.3.1 Water Masks

Water masks help organize the inland water data and constrain processing to only those land and coastal regions that possess water bodies. ATL13 relies on three types of hydrologic masks:

- ATL03 Inland Water Mask (applied to input data)
- ATL13 Regional Basin Mask
- ATL13 Inland Water Body Shape Mask

The ATL03 Inland Water Mask, shown in Figure 5, improves computational efficiency by allowing the ATL13 algorithm to process only ATLAS observations that have been flagged by ATL03 as inland water (Section 3.4, ATBD for ATL13).

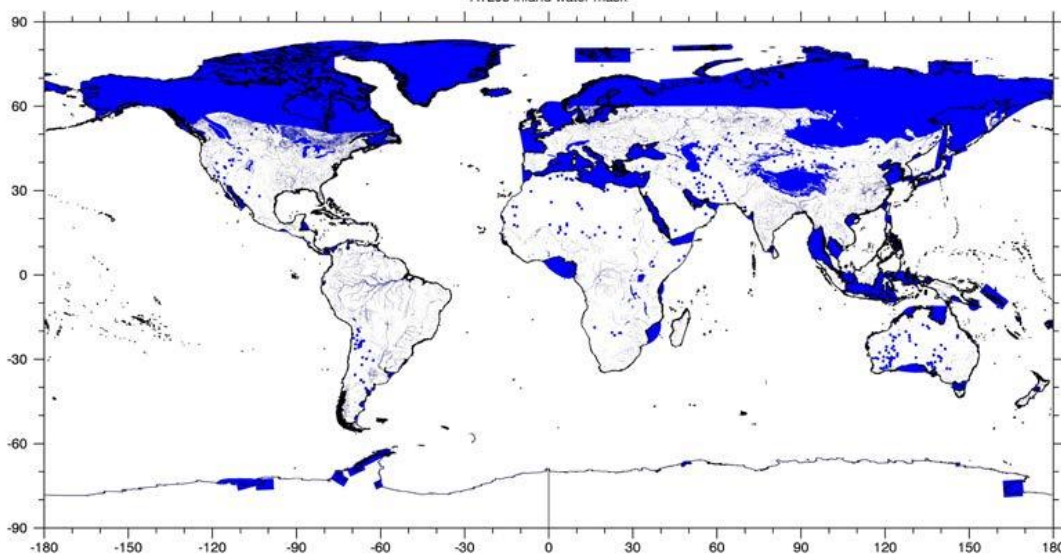


Figure 5. ATL03 Inland Water Mask. Observations that fall within shaded areas (blue) are flagged as water bodies.

This 0.1 km<sup>2</sup>, gridded mask was developed from a number of coastline and inland water databases including the Global Self-consistent, Hierarchical, High-resolution Geography (GSHHG) coastlines database and various lake shapefiles, including ephemeral lakes, permafrost extent, and custom shapes created to close larger bays in locations not otherwise addressed.

The ATL13 Regional Basin Mask comprises polygons that represent principally the outline of entire large river basins plus some adjacent intervening area. Each polygon contains all the lakes and rivers within that river basin and organizes in a logical manner the ATLAS data used to produce the hydrologic products (Section 3.5, ATBD for ATL13).

The ATL13 Inland Water Body Shape Mask identifies ICESat-2 crossings over individual water bodies. It was designed to delineate the shape and spatial distribution of contiguous individual water bodies, such as lakes and rivers, and is applied as a shape-file—unlike the gridded ATL03 mask flag described above. As implemented in this version of ATL13, the shape mask consists of polygons that each represent an entire single lake, reservoir, estuary, bay, or coastal buffer (rivers are not included at this time) with an approximately 100 m buffer over land to clearly distinguish the land/water interface. Each water body is identified by a unique number, latitude and longitude, and, if available, local name (Section 3.6, ATBD for ATL13).

### 2.3.2 Surface Height Algorithm

The number of inland water surface signal photons ranges between 0.5 and several photons per meter, under normal conditions, to more than 25 photons per meter for highly specular situations. The goal of ATL13 is to estimate the mean water surface height in short, statistically representative segments (~100 photons), for each ATLAS beam that crosses a water body in the along-track direction. Thus computing inland water heights requires distances of at least 100 m, depending on atmospheric, solar, and water conditions. In addition, although the large majority of the signal photons that return to ATLAS from a given water body are reflected from the surface, typically as many as several percent comprise subsurface backscatter. As such, prior to computing the ~100 photon short segments the algorithm analyzes longer segments (1 to 3 km), which contain a sufficient number of subsurface photons to estimate the volume scattering parameters. Thus the ATL13 product combines physical and statistical modeling approaches to characterize key physical processes related to open water surface dynamics and light propagation and retrieve inland water heights from (primarily) ATL03 data.

In brief, the algorithm: 1) identifies the beginning and ending edges where individual ATLAS beams intersect a contiguous water body; 2) models the reflectance components that contribute to the integrated signal return from the water body; 3) analyzes models of the surface water height statistical distributions, subsurface volume attenuation, and their relation to the distribution of the signal photons from water surface facets; 4) removes background photons to extract the true representation of water reflectance and height; 5) deconvolves the ATLAS instrument response function from the observations; 6) computes along-track statistics, including: surface water height; subsurface attenuation; coarse-resolution water depth; significant wave height; the mean, maximum along-track water surface slope and azimuth from the two adjacent strong beams; and 7) evaluates the accuracy and quality of the measurement.

The following sections outline the major components used to estimate inland water heights in ATL13. For additional details, consult the referenced sections in the ATBD for ATL13. The algorithm implementation is described in Section 5.0. The most recent version of this ATBD is available from the NASA Goddard Space Flight Center's ICESat-2 Data Products web page.

### 2.3.3 Inland Water Backscatter

"Section 4.2 | Satellite Inland Water Backscatter Model" in the ATBD for ATL13 describes the approach used to model inland water backscatter. It includes sections which discuss: the water surface specular model (4.2.1); the water surface foam model (4.2.2); the volume scattering model (4.2.3); bottom reflectance (4.2.4); the relative magnitude of anticipated returns (4.2.5); and required atmospheric and meteorological inputs (4.2.6).

### 2.3.4 Water Surface Height

"Section 4.3 | Water Surface Height Model" discusses the approach used to differentiate signal photons associated with water height, including subsections that address: removing signal photons not associated with water surface height (4.3.1); estimating the background and signal to background noise ratio (4.3.2); estimating water surface height and along-track slope (4.3.3); and estimating the slope variance (4.3.4).

### 2.3.5 ATLAS Instrument Response Function

"Section 4.4 | Instrument Response Function (Transmitted Pulse Shape)" and "Section 4.5 | Deconvolution of Instrument Response from Lidar Returns" describe the approach used to deconvolve the instrument response function (or histogram) from the observed histogram to extract the actual water response histogram.

## 3 QUALITY, ERRORS, AND LIMITATIONS

Data quality in this product depends largely on the precision of the georeferenced photons input from ATL03 and associated products evaluated prior to use by the ATL13 algorithm. The overall ensemble error per 100 inland water photons is estimated to be 6.1 cm. This calculation is detailed in "Section 4.9.1 | ICESat-2 Precision" in the ATBD for ATL13.

The Inland Water Team will be evaluating error in this product as more data are acquired. "Section 4.9.2 | Data Product Evaluation" in the ATBD describes the Inland Water Team's initial plan to assess ATL13 data quality in conjunction with relevant U.S. agencies, organizations, and university researchers.

## 4 VERSION HISTORY

Version 2 (January 2020)

## 5 CONTACTS AND ACKNOWLEDGMENTS

### **Michael F. Jasinski**

NASA Goddard Space Flight Center

Mail Code: 617

Greenbelt, MD 20771

### **Jeremy D. Stoll**

NASA Goddard Space Flight Center

Mail Code: 617

Greenbelt, MD 20771

### **David Hancock**

NASA Goddard Space Flight Center

Mail Code: 610.W

Wallops , VA 23337

### **John Robbins**

NASA Goddard Space Flight Center

Mail Code: 615

Greenbelt, MD 20771

### **Jyothi Nattala**

NASA Goddard Space Flight Center

Mail Code: 615

Greenbelt, MD 20771

### **Jamie Morison**

Polar Science Center

Applied Physics Laboratory

University of Washington

Seattle, WA 98105

### **Benjamin M. Jones**

Water and Environmental Research Center

University of Alaska Fairbanks

Fairbanks, AK 99775

### **Michael E. Ondrusek**

Center for Satellite Applications and Research

National Environmental Satellite, Data, and Information Service

National Oceanic and Atmospheric Administration  
College Park, MD 20740

**Tamlin M. Pavelsky**

Department of Geological Sciences  
University of North Carolina at Chapel Hill  
Chapel Hill, NC 27599

**Christopher Parrish**

College of Engineering  
Oregon State University  
Corvallis, OR 97331

## 6 DOCUMENT INFORMATION

### 6.1 Publication Date

---

28 May 2019

### 6.2 Date Last Updated

---

25 November 2020