



ATLAS/ICESat-2 L3A Along Track Inland Surface Water Data, Version 4

USER GUIDE

How to Cite These Data

As a condition of using these data, you must include a citation:

Jasinski, M. F., J. D. Stoll, D. Hancock, J. Robbins, J. Nattala, J. Morison, B. M. Jones, M. E. Ondrusek, T. M. Pavelsky, C. Parrish, and the ICESat-2 Science Team. 2021. *ATLAS/ICESat-2 L3A Along Track Inland Surface Water Data, Version 4*. [Indicate subset used]. Boulder, Colorado USA. NASA National Snow and Ice Data Center Distributed Active Archive Center.
<https://doi.org/10.5067/ATLAS/ATL13.004>. [Date Accessed].

FOR QUESTIONS ABOUT THESE DATA, CONTACT NSIDC@NSIDC.ORG

FOR CURRENT INFORMATION, VISIT <https://nsidc.org/data/ATL13>



National Snow and Ice Data Center

TABLE OF CONTENTS

1	DATA DESCRIPTION	2
1.1	Parameters	2
1.2	File Information.....	2
1.2.1	Format.....	2
1.2.2	ATLAS/ICESat-2 Description.....	2
1.2.3	File Contents.....	5
1.2.4	Data Groups.....	5
1.2.5	Naming Convention	6
1.2.6	Browse File	7
1.3	Spatial Information.....	7
1.3.1	Coverage	7
1.3.2	Resolution.....	7
1.3.3	Geolocation.....	8
1.4	Temporal Information	8
1.4.1	Coverage	8
1.4.2	Resolution.....	9
2	DATA ACQUISITION AND PROCESSING.....	9
2.1	Background	9
2.2	Acquisition	10
2.3	Processing.....	11
2.3.1	Water Masks	11
2.3.2	Surface Height Algorithm	12
2.4	Quality, Errors, and Limitations	13
3	VERSION HISTORY	13
4	CONTACTS AND ACKNOWLEDGMENTS	15
5	DOCUMENT INFORMATION.....	16
5.1	Publication Date	16
5.2	Date Last Updated.....	16

Note: The name of ATL13 V04 has changed to “ATLAS/ICESat-2 L3A Along Track Inland Surface Water Data” ATL13 V03 and prior versions were called “ATLAS/ICESat-2 L3A Inland Water Surface Height”

1 DATA DESCRIPTION

1.1 Parameters

Along-track surface water products for inland water bodies. Water bodies include lakes, reservoirs, bays, estuaries, and rivers, and a 7km near-shore buffer. Principal data parameters include the along-track water surface height and standard deviation, subsurface signal (532 nm) attenuation, significant wave height, wind speed, and coarse depth to bottom topography. Water surface heights are provided as both height above the WGS 84 ellipsoid (ITRF2014 Reference Frame) and height above the Earth Gravitational Model 2008 (EGM2008) mean sea level (MSL).

1.2 File Information

1.2.1 Format

Data are provided as HDF5 formatted files. HDF is a data model, library, and file format designed specifically for storing and managing data. For more information about HDF, visit the [HDF Support Portal](#).

The HDF Group provides tools for working with HDF5 formatted data. [HDFView](#) is free software that allows users to view and edit HDF formatted data files. In addition, the HDF - EOS | Tools and Information Center web page contains [code examples](#) in Python (pyhdf/h5py), NCL, MATLAB, and IDL for accessing and visualizing ICESat-2 files.

1.2.2 ATLAS/ICESat-2 Description

The following brief description of the Ice, Cloud and land Elevation Satellite-2 (ICESat-2) observatory and Advanced Topographic Laser Altimeter System (ATLAS) instrument is provided to help users better understand the file naming conventions, internal structure of data files, and other details referenced by this user guide. The ATL13 data product is described in detail in the Ice, Cloud, and land Elevation Satellite-2 Project Algorithm Theoretical Basis Document (ATBD) for Inland Water Data Products ([ATBD for ATL13 | V04, DOI: 10.5067/RNI05Y2CJ9FV](#)).

The ATLAS instrument and ICESat-2 observatory utilize a photon-counting lidar and ancillary systems (GPS and star cameras) to measure the time a photon takes to travel from ATLAS to Earth and back again and to determine the photon's geodetic latitude and longitude. Laser pulses from ATLAS illuminate three left/right pairs of spots on the surface that as ICESat-2 orbits Earth

trace out six ground tracks that are typically about 14 m wide. Each ground track is numbered according to the laser spot number that generates it, with ground track 1L (GT1L) on the far left and ground track 3R (GT3R) on the far right. Left/right spots within each pair are approximately 90 m apart in the across-track direction and 2.5 km in the along-track direction. The ATLAS data product is organized by ground track, with ground tracks 1L and 1R forming pair one, ground tracks 2L and 2R forming pair two, and ground tracks 3L and 3R forming pair three. Each pair also has a Pair Track—an imaginary line halfway between the actual location of the left and right beams (see figures 1 and 2). Pair tracks are approximately 3 km apart in the across-track direction.

The beams within each pair have different transmit energies—so-called weak and strong beams—with an energy ratio between them of approximately 1:4. The mapping between the strong and weak beams of ATLAS, and their relative position on the ground, depends on the orientation (yaw) of the ICESat-2 observatory, which is changed approximately twice per year to maximize solar illumination of the solar panels. The forward orientation corresponds to ATLAS traveling along the +x coordinate in the ATLAS instrument reference frame (see Figure 1). In this orientation, the weak beams lead the strong beams and a weak beam is on the left edge of the beam pattern. In the backward orientation, ATLAS travels along the -x coordinate, in the instrument reference frame, with the strong beams leading the weak beams and a strong beam on the left edge of the beam pattern (see Figure 2). The first yaw flip was performed on December 28, 2018, placing the spacecraft into the backward orientation. ATLAS reports the spacecraft orientation in the `sc_orient` parameter stored in the `/orbit_info/` data group (see Section 1.2.4 Data Groups). In addition, the current spacecraft orientation, as well as a history of previous yaw flips, is available in the [ICESat-2 Major Activities](#) tracking document (.xlsx).

The Reference Ground Track (RGT) refers to the imaginary track on Earth at which a specified unit vector within the observatory is pointed. Onboard software aims the laser beams so that the RGT is always between ground tracks 2L and 2R (i.e. coincident with Pair Track 2). The ICESat-2 mission acquires data along 1,387 different RGTs. Each RGT is targeted in the polar regions once every 91 days (i.e. the satellite has a 91-day repeat cycle) to allow elevation changes to be detected. Cycle numbers track the number of 91-day periods that have elapsed since the ICESat-2 observatory entered the science orbit. RGTs are uniquely identified, for example in file names, by appending the two-digit cycle number (cc) to the RGT number, e.g. 0001cc to 1,387cc.

Under normal operating conditions, no data are collected along the RGT; however, during spacecraft slews, or off-pointing, some ground tracks may intersect the RGT. Off-pointing refers to a series of plans over the mid-latitudes that have been designed to facilitate a global ground and canopy height data product with approximately 2 km track spacing. Off-pointing began on 1 August 2019 with RGT 518, after the ATLAS/ICESat-2 Precision Pointing Determination (PPD) and

Precision Orbit Determination (POD) solutions had been adequately resolved and the instrument had pointed directly at the reference ground track for a full 91 days (1,387 orbits).

Users should note that between 14 October 2018 and 30 March 2019 the spacecraft pointing control was not yet optimized. As such, ICESat-2 data acquired during that time do not lie along the nominal RGTs, but are offset at some distance from the RGTs. Although not along the RGT, the geolocation information for these data is not degraded.

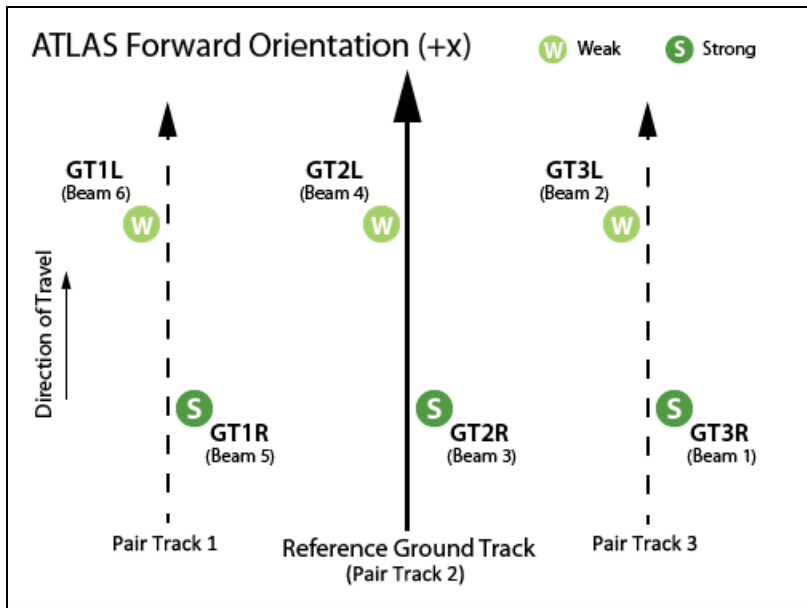


Figure 1. Spot and ground track (GT) naming convention with ATLAS oriented in the forward (instrument coordinate +x) direction.

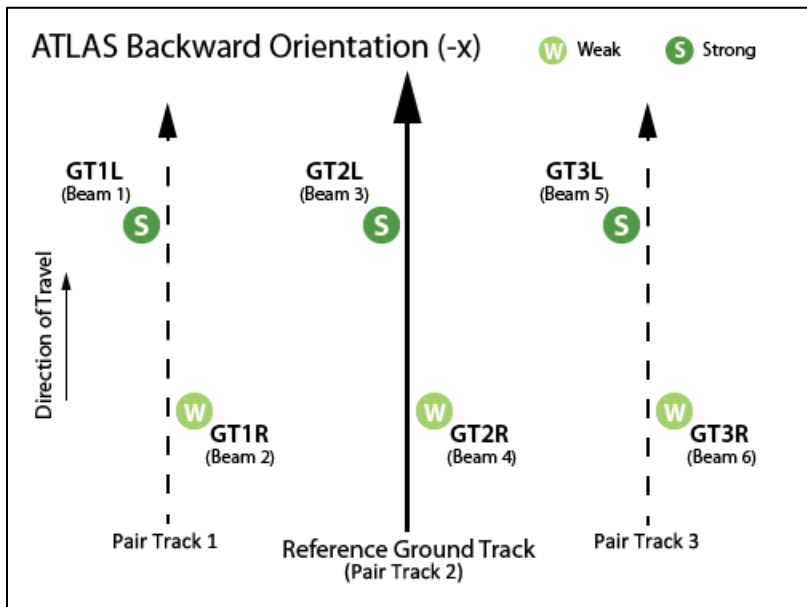


Figure 2. Spot and ground track (GT) naming convention with ATLAS oriented in the backward (instrument coordinate -x) direction.

NOTE: ICESat-2 reference ground tracks with dates and times can be downloaded as KMZ files from NASA's [ICESat-2 | Technical Specs](#) page, below the Orbit and Coverage table.

1.2.3 File Contents

Data files (granules) contain inland water body surface heights acquired during four of ATLAS's 1,387 orbits.

1.2.4 Data Groups

Within data files, similar variables such as science data, instrument parameters, altimetry data, and metadata are grouped together according to the HDF model. ATL13 data files contain the top-level groups shown in Figure 3:

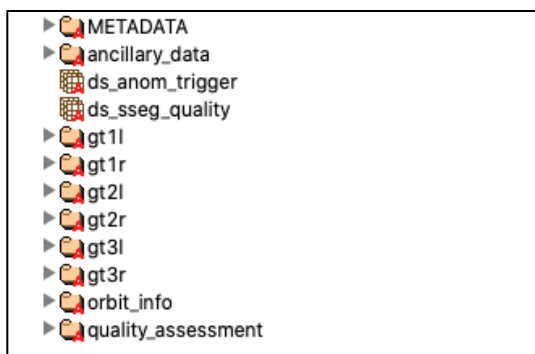


Figure 3. ATL13 data groups shown in HDFView.

The following sections summarize the structure and primary variables of interest in ATL13 data files. For a complete list of parameters, see the [ATL13 Data Dictionary](#).

1.2.4.1 METADATA

ISO19115 structured summary metadata for the granule, including content that describes the required geospatial information.

1.2.4.2 ancillary_data

Information that is ancillary to the data product. This may include product and instrument characteristics and/or processing constants.

1.2.4.3 gt1l – gt3r

Six ground track groups (gt1l – gt3r) that contain the per-beam data parameters for the specified ATLAS ground track. Parameters of interest include:

- Water surface height (ht_water_surf) above the WGS 84 ellipsoid;
- Orthometric surface height (ht_ortho), i.e. height above the EGM2008 MSL;
- Geoid value at short segment reporting location (segment_geoid);
- Water body type (inland_water_body_type); size (inland_water_body_size); shape mask source (inland_water_body_source); and water body ID (inland_water_body_id). When concatenated, these four values uniquely identify each water body (See "4.7.1.2 | Water Body Reference Identification Scheme" in the ATBD for ATL13).
- Short segment length flag (qf_sseg_length);
- Mean latitude (sseg_mean_lat), longitude (sseg_mean_lon), and time (sseg_mean_time) of short segment signal qualified photons
- Short segment, along-track, water-body surface slope (segment_slope_trk_bdy)

The gt[x] groups also contain standard deviation, subsurface signal (532 nm) attenuation, significant wave height, wind speed, and coarse depth to bottom topography. The complete contents of the gt[x] groups are listed in "Table 5-3 | ATL13 Along Track (Short Segment) Output Parameters (/gtx)" in the ATBD for ATL13.

1.2.4.4 orbit_info

Orbit parameters that are constant for a granule, such as the RGT number and cycle and the spacecraft orientation (sc_orient).

1.2.4.5 quality_assessment

Quality assessment data for the granule as a whole, including a pass/fail flag and a failure reason indicator.

1.2.5 Naming Convention

Data files utilize the following naming convention:

Example:

- ATL13_20181013205512_02330101_004_01.h5
- ATL13_[yyyymmdd][hhmmss]_[tttccss]_[vvv_rr].h5

The following table describes the file naming convention variables:

Table 1. File Naming Convention Variables and Descriptions

Variable	Description
ATL13	ATLAS/ICESat-2 L3A Along Track Inland Surface Water Data
yyyymmdd	Year, month, and day of data acquisition
hhmmss	Data acquisition start time, hour, minute, and second (UTC)

tttt	Four digit RGT number of the first of four tracks in the granule. The ICESat-2 mission has 1,387 RGTs, numbered from 0001 to 1387.
cc	Cycle Number. The cycle number tracks the number of 91-day periods that have elapsed since ICESat-2 entered the science orbit.
ss	Segment number. Not used for ATL13. Always 01. ¹
vvv_rr	Version and revision number. ²

NOTE:

¹Some ATLAS/ICESat-2 products (e.g. ATL03) are provided as files that span 1/14th of an orbit. As such, these products' file names specify a segment number that ranges from 01 to 14. Because ATL13 data files span four full orbits, the segment number is always set to 01.

²From time to time, NSIDC receives duplicate, reprocessed granules from our data provider. These granules have the same file name as the original (i.e. date, time, ground track, cycle, and segment number), but the revision number has been incremented. Although NSIDC deletes the superseded granule, the process can take several days. As such, if you encounter multiple granules with the same file name, please use the granule with the highest revision number.

Each data file has a corresponding XML file that contains additional file level metadata. XML metadata files have the same name as their corresponding .h5 file, but with .xml appended.

1.2.6 Browse File

Browse files are provided as HDF5 formatted files that contain images designed to quickly assess the location and quality of each granule's data. Browse images include water surface orthometric height (named "ht_ortho") and granule ground track location and coverage ("groundtrack").

Browse files utilize the same naming convention as their corresponding data file, but with _BRW appended.

1.3 Spatial Information

1.3.1 Coverage

Spatial coverage spans approximately 88° N latitude to 88° S. Water surface height processing is constrained by an inland water mask (see Section 2.3.1 Water Masks).

1.3.2 Resolution

The ATLAS instrument transmits laser pulses at 10 kHz. At the nominal ICESat-2 orbit altitude of 500 km, this yields approximately one transmitted laser pulse every 0.7 meters along ground tracks. Note, however, that the number of photons that return to the telescope depends on surface

reflectivity and cloud cover (which obscures ATLAS's view of Earth). As such, the spatial resolution of individual signal photons varies.

Inland water heights are processed in segments that contain a minimum of approximately 100 signal photons, to ensure the segment accurately characterizes the water surface. As such, the segments vary in length from approximately 30 m to 100 m, depending on factors such as signal quality and water and atmospheric conditions.

1.3.3 Geolocation

Latitudes and longitudes refer to the WGS 84 coordinate system. Water surface heights are provided as both heights above the WGS 84 ellipsoid (ITRF2014 Reference Frame) and as heights above mean sea level (EGM2008). The following table contains details about WGS 84:

Table 2. Geolocation Details

Geographic coordinate system	WGS 84
Projected coordinate system	N/A
Longitude of true origin	Prime Meridian, Greenwich
Latitude of true origin	N/A
Scale factor at longitude of true origin	N/A
Datum	World Geodetic System 1984
Ellipsoid/spheroid	WGS 84
Geoid	EGM2008
Units	degrees
False easting	N/A
False northing	N/A
EPSG codes	4326 (WGS 84) 3855 (EGM2008)
PROJ4 string	+proj=longlat +datum=WGS84 +no_defs
Reference	https://epsg.io/4326 (WGS 84) https://epsg.io/3855 (EGM2008)

For information about ITRF2014, see the International Terrestrial Reference Frame | [ITRF2014 webpage](#).

1.4 Temporal Information

1.4.1 Coverage

13 October 2018 to 15 July 2021

1.4.2 Resolution

Repeat observations for any given water body depend on its size and geographic location. The frequency at which ATLAS/ICESat-2 crosses inland water bodies depends on how often the spacecraft's orbital pattern intersects with the water body mask. For high latitude, polar regions (approximately $\pm 65^\circ$), the mission requirements mandate repeat observations every 91 days along the precisely established reference tracks (i.e. the satellite has a 91 day repeat cycle). However, starting with cycle 04 (28 June 2019) ATLAS/ICESat-2 is slated to begin conducting a systematic off-pointing scenario at lower latitudes that is designed to achieve approximately 2 km global spacing after two years of data acquisition.

2 DATA ACQUISITION AND PROCESSING

2.1 Background

The ATL13 product is derived primarily from geolocated, time-tagged photon heights and other parameters passed to it from the ATLAS/ICESat-2 L2A Global Geolocated Photon Data (ATL03) product. The following figure illustrates the family of ICESat-2 data products and the connections between them:

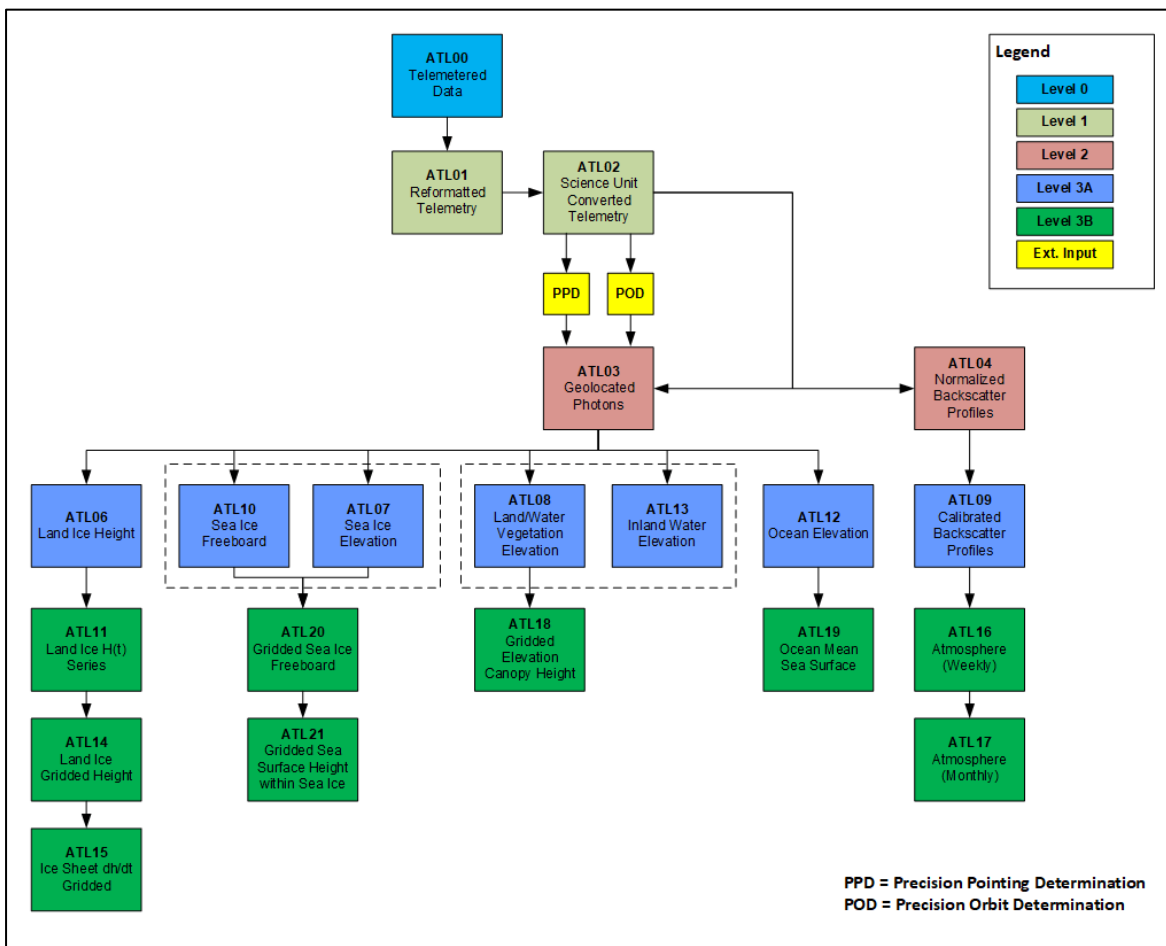


Figure 4. ICESat-2 data processing flow. The ATL01 algorithm reformats and unpacks the Level 0 data and converts it into engineering units. ATL02 processing converts the ATL01 data to science units and applies instrument corrections. The Precision Pointing Determination (PPD) and Precision Orbit Determination (POD) solutions compute the pointing vector and position of the ICESat-2 observatory as a function of time. ATL03 acts as the bridge between the lower level, instrumentation-specific products and the higher-level, surface-specific products.

2.2 Acquisition

Inputs from ATL03 product include precise latitude, longitude, and height for every received photon, plus applied geophysical corrections such as Earth tides and atmospheric delays. Each photon is also classified as signal or background and by surface type (land ice, sea ice, land, ocean, and inland water).

NOTE: The following sections summarize the approach used to generate the ATL13 product. For a complete description of the theory and algorithm, consult the [ATBD for ATL13](#).

2.3 Processing

2.3.1 Water Masks

Water masks help organize the inland water data and constrain processing to only those land and coastal regions that possess water bodies. ATL13 relies on three types of hydrologic masks:

- ATL03 Inland Water Mask (applied to input data)
- ATL13 Regional Basin Mask
- ATL13 Inland Water Body Shape Mask

The **ATL03 Inland Water Mask**, shown in Figure 5, improves computational efficiency by allowing the ATL13 algorithm to process only ATLAS observations that have been flagged by ATL03 as inland water (Section 3.4, ATBD for ATL13).

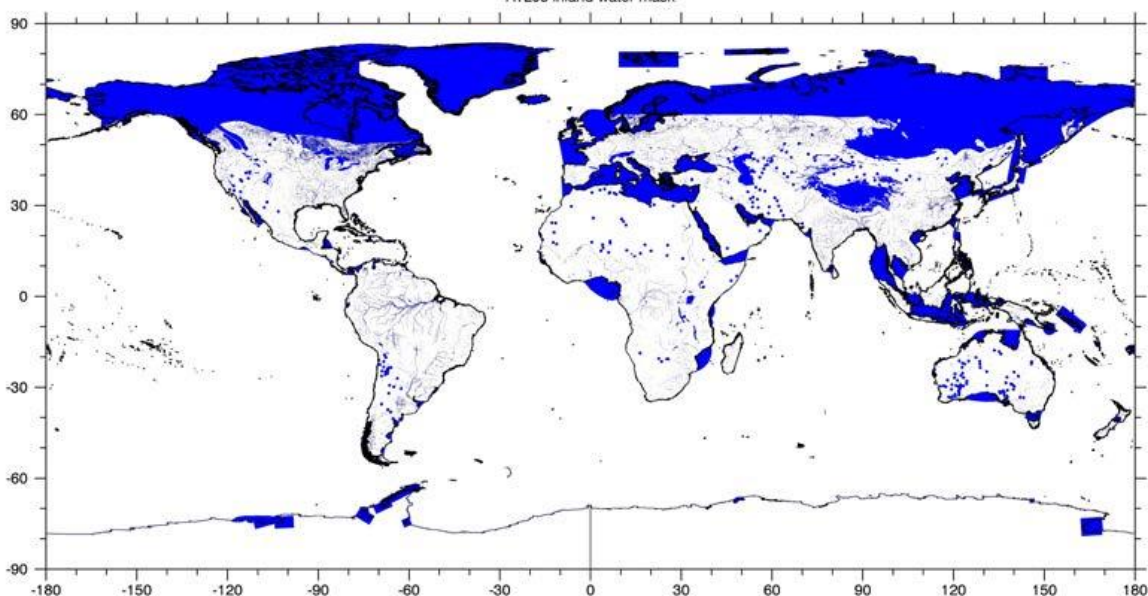


Figure 5. ATL03 Inland Water Mask. Observations that fall within shaded areas (blue) are flagged as water bodies.

This 0.1 km², gridded mask was developed from a number of coastline and inland water databases including the [Global Self-consistent, Hierarchical, High-resolution Geography \(GSHHG\)](#) coastlines database and various lake shapefiles, including ephemeral lakes, permafrost extent, and custom shapes created to close larger bays in locations not otherwise addressed.

The **ATL13 Regional Basin Mask** comprises polygons that represent principally the outline of entire large river basins plus some adjacent intervening area. Each polygon contains all the lakes and rivers within that river basin and organizes in a logical manner the ATLAS data used to produce the hydrologic products (Section 3.5, ATBD for ATL13).

The **ATL13 Inland Water Body Shape Mask** identifies ICESat-2 crossings over individual water bodies. It was designed to delineate the shape and spatial distribution of contiguous individual water bodies, such as lakes and rivers, and is applied as a shape-file—unlike the gridded ATL03 mask flag described above. As implemented in this version of ATL13, the shape mask consists of polygons that each represent an entire single lake, reservoir, estuary, bay, or coastal buffer with an approximately 100 m buffer over land to clearly distinguish the land/water interface. Each water body is identified by a unique number, latitude and longitude, and, if available, local name (Section 3.6, ATBD for ATL13).

2.3.2 Surface Height Algorithm

The number of inland water surface signal photons ranges between 0.5 and several photons per meter, under normal conditions, to more than 25 photons per meter for highly specular situations. The goal of ATL13 is to estimate the mean water surface height in short, statistically representative segments (~100 photons), for each ATLAS beam that crosses a water body in the along-track direction. Thus, computing inland water heights requires distances of at least 100 m, depending on atmospheric, solar, and water conditions. In addition, although the large majority of the signal photons that return to ATLAS from a given water body are reflected from the surface, typically as many as several percent comprise subsurface backscatter. As such, prior to computing the ~100 photon short segments the algorithm analyzes longer segments (1 to 3 km), which contain a sufficient number of subsurface photons to estimate the volume scattering parameters. Thus, the ATL13 product combines physical and statistical modeling approaches to characterize key physical processes related to open water surface dynamics and light propagation and retrieve inland water heights from (primarily) ATL03 data.

In brief, the algorithm: 1) identifies the beginning and ending edges where individual ATLAS beams intersect a contiguous water body; 2) models the reflectance components that contribute to the integrated signal return from the water body; 3) analyzes models of the surface water height statistical distributions, subsurface volume attenuation, and their relation to the distribution of the signal photons from water surface facets; 4) removes background photons to extract the true representation of water reflectance and height; 5) deconvolves the ATLAS instrument response function from the observations; 6) computes along-track statistics, including: surface water height; subsurface attenuation; coarse-resolution water depth; significant wave height; the mean, maximum along-track water surface slope and azimuth from the two adjacent strong beams; and 7) evaluates the accuracy and quality of the measurement.

The following sections outline the major components used to estimate inland water heights in ATL13. For additional details, consult the referenced sections in the [ATBD for ATL13](#). The algorithm implementation is described in Section 4.0.

2.3.2.1 Inland Water Backscatter

"Section 4.2 | Satellite Inland Water Backscatter Model" in the ATBD for ATL13 describes the approach used to model inland water backscatter. It includes sections which discuss: the water surface specular model (4.2.1); the water surface foam model (4.2.2); the volume scattering model (4.2.3); bottom reflectance (4.2.4); the relative magnitude of anticipated returns (4.2.5); and required atmospheric and meteorological inputs (4.2.6).

2.3.2.2 Water Surface Height

"Section 4.3 | Water Surface Height Model" discusses the approach used to differentiate signal photons associated with water height, including subsections that address: removing signal photons not associated with water surface height (4.3.1); estimating the background and signal to background noise ratio (4.3.2); estimating water surface height and slope (4.3.3); and estimating the water surface slope variance (4.3.4).

2.3.2.3 ATLAS Instrument Response Function

"Section 4.4 | Instrument Response Function (Transmitted Pulse Shape)" and "Section 4.5 | Deconvolution of Instrument Response from Lidar Returns" describe the approach used to deconvolve the instrument response function (or histogram) from the observed histogram to extract the actual water response histogram.

2.4 Quality, Errors, and Limitations

Data quality in this product depends largely on the precision of the georeferenced photons input from ATL03 and associated products evaluated prior to use by the ATL13 algorithm. The overall ensemble error per 100 inland water photons is estimated to be 6.1 cm. This calculation is detailed in "Section 4.9.1 | ICESat-2 Precision" in the ATBD for ATL13.

The Inland Water Team will be evaluating error in this product as more data are acquired. "Section 4.9.2 | Data Product Evaluation" in the ATBD describes the Inland Water Team's initial plan to assess ATL13 data quality in conjunction with relevant U.S. agencies, organizations, and university researchers.

3 VERSION HISTORY

Version 4 (15 July 2021)

Changes for this version include:

- Implemented retention of unused photons associated with the same geolocation segment pulse ID and major frame ID (ph_id_pulse, pce_mframe_cnt) across ATL13 segments/transects.
- Implemented exclusion of TEP photon events when forming ATL13 short segments.
- Implemented computation of water surface spectral moments and spectral width. The spectral width flag (qf_spec_width) is now reported on the ATL13 product.
- Fixed errors related to the identification of photons necessary to define valid crests and upcrossings for the computation of the spectral width parameter and electromagnetic bias (segment_bias_em). Defined upcrossings relative to the mean height of the Gaussian fit to the normalized, detrended surface photon histogram.
- Updated source code for a sign change to compute electromagnetic bias (segment_bias_em) as a positive expression.
- Filtered geolocation segments whose composite POD/PPD flag is non-zero, invalidating possibly degraded geolocation solutions.
- Updated weak beam interpolation of ATL09 strong beam atmospheric profile source data (e.g. cloud_flag_atm) to be aligned by along-track segment (segment_id) and not time.
- Added short segment fractions of near and full saturation, computed from a weighted average of nearly and fully saturated fractions of pulses within ATL03 geo-segments overlapping the segment.
- Added DEM height and source at the short segment rate, based on DEM heights and sources of ATL03 reference photons of all geolocation segments overlapping the short segment.
- The ATL03 EGM2008 geoid is now reported in the tide free system. Implemented updates to WGS-84 ellipsoid photon heights to re-reference the mean tide system geoid when forming orthometric height, using geoid_free2mean.
- Implemented computation of height adjustment to be applied to the apparent surface height to account for deconvolution analysis, and added a flag representing the range of long segment height adjustment values (qf_ht_adj).
- Both the first photon bias correction (segment_fpb_correction) and mean height adjustment estimated from deconvolution are now applied to the observed apparent surface height (segment_apparent_height) when computing orthometric heights and heights referenced to the WGS-84 ellipsoid (ht_ortho & ht_water_surf).
- Implemented updates to ATL13 short segment along-track water body surface slope (segment_slope_trk_bdy) to include spacecraft velocity in its derivation.
- Added additional tiers to the flag that indicates the range of long segment lengths (qf_lseg_length).
- Implemented exclusion of very long (L_sub_ID) segments associated with insufficient photon counts within the range of subsurface fit from contributing to the exponential fit to the observed histogram. Such segments are not processed through the subsurface deconvolution to determine their attenuation characteristics and default values are assumed for the subsurface parameters. Subsurface attenuation coefficients (subsurface_attenuation) reported by short segments covered by such L_sub_ID segments are set to invalid on the ATL13 product.
- Made anomalous short-segment information available in a separate subgroup, anom_ssegs, populated with output parameters such as water body reference ID, standard deviation of signal photon heights per segment and coarse water height (atl13refid,

anom_sseg_stdev & coarse_transect_ht) for segments deemed anomalous within each body transect.

- Implemented ingestion of ATL03 quality_ph (at photon rate) and computation of short segment photon counts designated at each quality level (as described by elements of the dimension scale vector /ds_sseg_quality) as a rank 2 array for both anomalous & non-anomalous segments (segment_quality & anom_sseg_quality).
- The short segment anomaly testing is now inclusive of all anomaly tests. Within the anom_ssegs subgroup, the trigger flag anom_sseg_trigger_flag has been implemented as a rank 2 array, where the magnitude of each row element indicates result of anomaly testing from a specific cause for a given segment, as described by elements of the dimension scale vector /ds_anom_trigger.
- Added anomalous short segment averaged coordinates and length based on endpoint locations with the anom_ssegs subgroup.

4 CONTACTS AND ACKNOWLEDGMENTS

Michael F. Jasinski

NASA Goddard Space Flight Center

Mail Code: 617

Greenbelt, MD 20771

Jeremy D. Stoll

NASA Goddard Space Flight Center

Mail Code: 617

Greenbelt, MD 20771

David Hancock

NASA Goddard Space Flight Center

Mail Code: 610.W

Wallops , VA 23337

John Robbins

NASA Goddard Space Flight Center

Mail Code: 615

Greenbelt, MD 20771

Jyothi Nattala

NASA Goddard Space Flight Center

Mail Code: 615

Greenbelt, MD 20771

Jamie Morison

Polar Science Center

Applied Physics Laboratory
University of Washington
Seattle, WA 98105

Benjamin M. Jones

Water and Environmental Research Center
University of Alaska Fairbanks
Fairbanks, AK 99775

Michael E. Ondrusek

Center for Satellite Applications and Research
National Environmental Satellite, Data, and Information Service
National Oceanic and Atmospheric Administration
College Park, MD 20740

Tamlin M. Pavelsky

Department of Geological Sciences
University of North Carolina at Chapel Hill
Chapel Hill, NC 27599

Christopher Parrish

College of Engineering
Oregon State University
Corvallis, OR 97331

5 DOCUMENT INFORMATION

5.1 Publication Date

15 July 2021

5.2 Date Last Updated

14 December 2021