



# SMAP-Derived 1-km Downscaled Surface Soil Moisture Product, Version 1

---

## USER GUIDE

### How to Cite These Data

As a condition of using these data, you must include a citation:

Lakshmi, V. and B. Fang. 2023. *SMAP-Derived 1-km Downscaled Surface Soil Moisture Product, Version 1*. [Indicate subset used]. Boulder, Colorado USA. NASA National Snow and Ice Data Center Distributed Active Archive Center. <https://doi.org/10.5067/U8QZ2AXE5V7B>. [Date Accessed].

FOR QUESTIONS ABOUT THESE DATA, CONTACT [NSIDC@NSIDC.ORG](mailto:NSIDC@NSIDC.ORG)

FOR CURRENT INFORMATION, VISIT <https://nsidc.org/data/NSIDC-0779>



National Snow and Ice Data Center

# TABLE OF CONTENTS

1	DATA DESCRIPTION.....	2
1.1	Parameters .....	2
1.2	File Information .....	2
1.2.1	Format .....	2
1.2.2	File Contents .....	2
1.2.3	File Naming Convention .....	3
1.3	Spatial Information .....	4
1.3.1	Coverage .....	4
1.3.2	Resolution.....	4
1.3.3	Geolocation .....	4
1.4	Temporal Information.....	5
1.4.1	Coverage .....	5
1.4.2	Resolution.....	6
2	DATA ACQUISITION AND PROCESSING .....	6
2.1	Acquisition .....	6
2.2	Processing .....	6
2.3	Quality, Errors, and Limitations .....	6
2.4	Instrumentation .....	7
3	RELATED DATA SETS .....	7
4	REFERENCES .....	7
5	DOCUMENT INFORMATION.....	7
5.1	Publication Date.....	7
5.2	Date Last Updated .....	7

# 1 DATA DESCRIPTION

This data product contains global daily 1 km resolution surface soil moisture derived from the SMAP L-band radiometer. Specifically, MODIS land surface temperature data is used with the SMAP Enhanced L2radiometer Half-Orbit 9 km EASE-Grid Soil Moisture product in a downscaling algorithm to estimate soil moisture. The data set is validated by in situ soil moisture measurements from dense soil moisture networks representing different global land cover types. The temporal coverage is 1 April 2015 to 29 September 2022.

## 1.1 Parameters

---

This product provides global daily 1 km resolution surface soil moisture (representing approximately the top 5 cm of the soil column on average). Daily data are separated into bands denoting the ascending and descending half-orbits of the SMAP L-band radiometer.

## 1.2 File Information

---

### 1.2.1 Format

Data files are provided in Geographic Tagged Image File Format (GeoTIFF).

### 1.2.2 File Contents

The data set includes a GeoTIFF file for each day with two soil moisture layers, one for the ascending and one for the descending SMAP L-band radiometer pass, as outlined in Table 1 and pictured in Figure 1.

Table 1. Layer Descriptions

<b>Band</b>	<b>Description</b>	<b>Units</b>
Band 1	SMAP 1 km downscaled soil moisture, measured on the descending overpass (6 AM)	m <sup>3</sup> /m <sup>3</sup>
Band 2	SMAP 1 km downscaled soil moisture, measured on the ascending overpass (6 PM)	m <sup>3</sup> /m <sup>3</sup>

10-04-2020

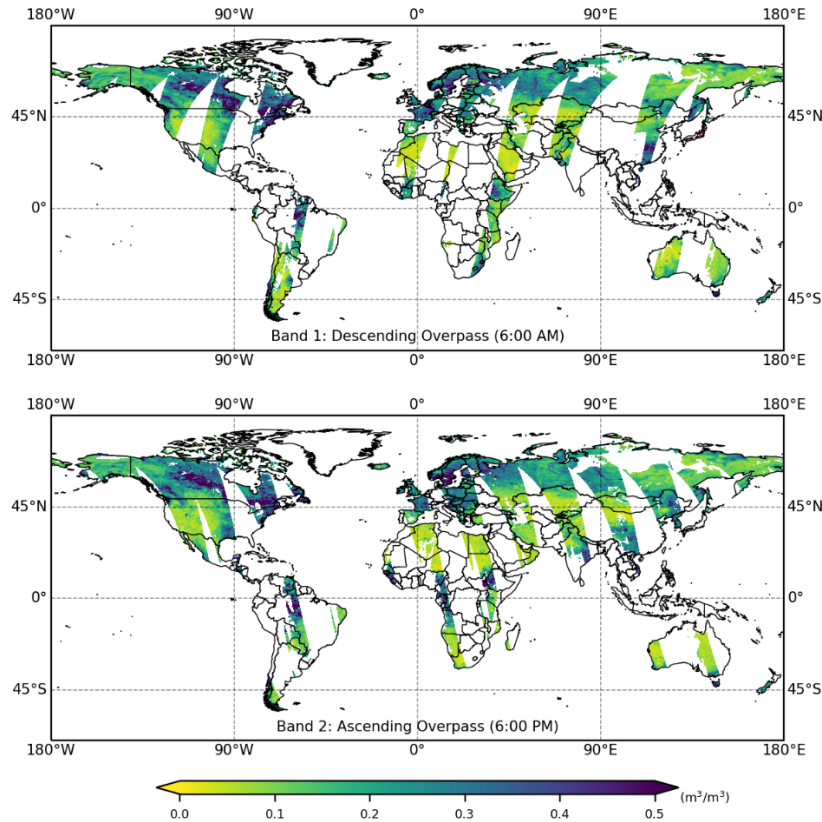


Figure 1. Example GeoTIFF

### 1.2.3 File Naming Convention

Files are named according to the following convention:

NSIDC-0779\_EASE2\_G1km\_SMAP\_SM\_DS\_yyyymmdd.tif

Table 2 describes the variables within each file name:

Table 2. File Naming Convention

Variable	Description
NSIDC-0779	NSIDC unique data set identifier
EASE2_G1km	The data use the global EASE-Grid 2.0 projection at 1 km resolution
SMAP	SMAP mission data
SM	Soil moisture data
DS	The data are downscaled
yyymmdd	4 digit year, 2 digit month, 2 digit day of the first data element that appears in the product.
.tif	File extension

## 1.3 Spatial Information

### 1.3.1 Coverage

Coverage spans 180° W to 180° E, and from approximately 86° N to 86° S, as defined by EASE-Grid 2.0 coverage. The gap in coverage at both the North and South Pole, called a pole hole, has a radius of approximately 400 km. The swath width is 1000 km, enabling nearly global coverage every two to three days. Figure 2 shows the spatial coverage of the SMAP L-band radiometer for one descending half orbit, which comprises one band of this data set.

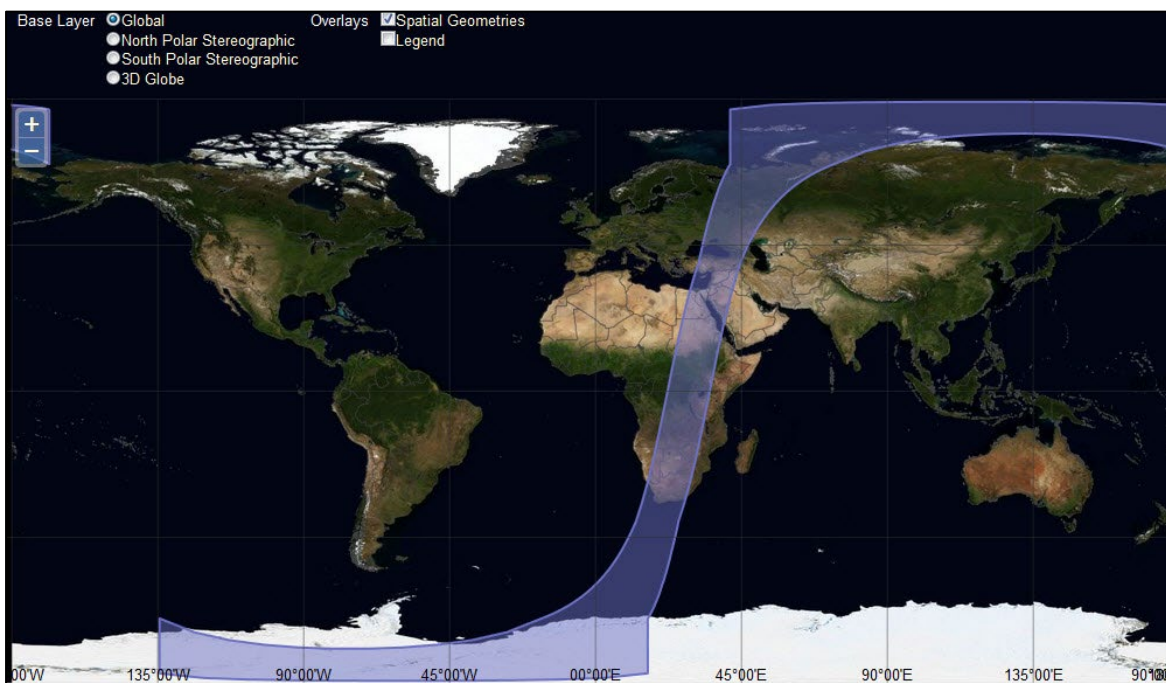


Figure 2. Spatial coverage map displaying one descending half orbit of the SMAP L-band radiometer.

### 1.3.2 Resolution

1 km

### 1.3.3 Geolocation

Data are gridded using the global cylindrical EASE-Grid 2.0 projection downscaled to 1 km. The following tables provide information for geolocating this data set. For more on EASE-Grid 2.0, refer to the [EASE Grids](#) website.

Table 3. Geolocation details for the downscaled EASE-Grid 2.0 projections used in this product

<b>Geographic coordinate system</b>	WGS 84
<b>Projected coordinate system</b>	EASE-Grid 2.0 Global
<b>Longitude of true origin</b>	0
<b>Standard Parallel</b>	30
<b>Scale factor at longitude of true origin</b>	N/A
<b>Datum</b>	WGS 84
<b>Ellipsoid/spheroid</b>	WGS 84
<b>Units</b>	meter
<b>False easting</b>	0
<b>False northing</b>	0
<b>EPSG code</b>	6933
<b>PROJ4 string</b>	+proj=cea +lon_0=0 +lat_ts=30 +x_0=0 +y_0=0 +ellps=WGS84 +towgs84=0,0,0,0,0,0,0 +units=m +no_defs
<b>Reference</b>	<a href="http://epsg.io/6933">http://epsg.io/6933</a>

Table 4. Grid details for the downscaled EASE-Grid 2.0 projections used in this product

<b>Grid cell size (x, y pixel dimensions)</b>	1,000.895 m (x) 1,000.895 m (y)
<b>Number of columns</b>	34704
<b>Number of rows</b>	14616
<b>Geolocated lower left point in grid</b>	86° S, 180.000° W
<b>Nominal gridded resolution</b>	1 km by 1 km
<b>Grid rotation</b>	N/A
<b>ulxmap – x-axis map coordinate of the outer edge of the upper-left pixel</b>	-17367530.04
<b>ulymap – y-axis map coordinate of the outer edge of the upper-left pixel</b>	7314540.66

## 1.4 Temporal Information

### 1.4.1 Coverage

This data set spans 1 April 2015 to 29 September 2022. While these dates suggest a continuous sequence of data, users should note that some empty data files exist where input data were not available. For a comprehensive list of missing or bad data, please see the [SMAP Master List of Bad and Missing Data](#).

The temporal coverage will be extended every 6-12 months.

## 1.4.2 Resolution

Daily

# 2 DATA ACQUISITION AND PROCESSING

## 2.1 Acquisition

---

[SMAP Enhanced L1C Radiometer Half-Orbit 9 km EASE-Grid Brightness Temperatures, Version 3 \(SPL1CTB\\_E\)](#) data were used to create the [SMAP Enhanced L2 Radiometer Half-Orbit 9 km EASE-Grid Soil Moisture \(SPL2SMP\\_E\)](#) data that were downscaled to create this data set.

## 2.2 Processing

---

A soil moisture downscaling algorithm, based on thermal inertia theory, was used to downscale global 9 km SMAP soil moisture data, paired with Aqua MODIS data, to 1 km. The algorithm is based on the inverse relationship between land surface temperature differences from 1:30 AM to 1:30 PM Aqua MODIS overpasses and corresponding soil moisture from SMAP overpasses at 6 AM and 6 PM. This relationship was modeled using Global Land Data Assimilation System (GLDAS) Noah model output variables of surface skin temperature and global soil moisture and Land Long-Term Data Record (LTDR) normalized difference vegetation index (NDVI) data.

For more information, the downscaling algorithm is described in detail in Fang et al. (2022).

## 2.3 Quality, Errors, and Limitations

---

In situ soil moisture observations, from dense networks around the world, were used to validate the 1 km downscaled and 9 km data. The validation metrics indicated that both the 1 km and 9 km soil moisture data have overall overestimation trends. The in situ measurements used to validate the data were less spatially representative than the global SMAP soil moisture data. Comparing the downscaled data with in situ measurements indicated several data quality characteristics:

- The downscaling model performed better in the middle and low latitudes compared with high latitudes and in warm months compared with cold months.
- Regions with mountains, dense vegetation, and undulating surface terrain experienced poorer performance.
- Extremely wet and extremely dry months experienced poorer performance.

The downscaled SMAP data are missing in the global northernmost regions in winter months and certain subtropical and tropical regions in rainy seasons due to snow, ice, and cloud cover. The different data sources (GLDAS, SMAP, and MODIS) also sensed different soil depths.

Complete details on quality, error, and limitations can be found in Fang et al. (2022).

## 2.4 Instrumentation

---

For a detailed description of the SMAP instrument, visit the [SMAP Instrument](#) page at the Jet Propulsion Laboratory (JPL) SMAP website.

## 3 RELATED DATA SETS

[SMAP Data at NSIDC | Overview](#)

[SMAP Radar Data at the ASF DAAC](#)

[SMAP Enhanced L2 Radiometer Half-Orbit 9 km EASE-Grid Soil Moisture](#)

## 4 REFERENCES

Fang, B., Lakshmi, V., Bindlish, R., Jackson, T.J. and Liu, P.W., 2020. Evaluation and validation of a high spatial resolution satellite soil moisture product over the Continental United States. *Journal of Hydrology*, 588, p.125043. <https://doi.org/10.1016/j.jhydrol.2020.125043>.

Fang, B., Lakshmi, V., Cosh, M., Liu, P.W., Bindlish, R. and Jackson, T.J., 2022. A global 1-km downscaled SMAP soil moisture product based on thermal inertia theory. *Vadose Zone Journal*, 21(2), p.e20182. <https://doi.org/10.1002/vzj2.20182>.

## 5 DOCUMENT INFORMATION

### 5.1 Publication Date

---

March 2023

### 5.2 Date Last Updated

---

July 2023