



MODIS/Aqua Snow Cover 8-Day L3 Global 0.05Deg CMG, Version 61

USER GUIDE

How to Cite These Data

As a condition of using these data, you must include a citation:

Hall, D. K. and G. A. Riggs. 2021. *MODIS/Aqua Snow Cover 8-Day L3 Global 0.05Deg CMG, Version 61*. [Indicate subset used]. Boulder, Colorado USA. NASA National Snow and Ice Data Center Distributed Active Archive Center. <https://doi.org/10.5067/MODIS/MYD10C2.061>. [Date Accessed].

FOR QUESTIONS ABOUT THESE DATA, CONTACT NSIDC@NSIDC.ORG

FOR CURRENT INFORMATION, VISIT <https://nsidc.org/data/MYD10C2>



National Snow and Ice Data Center

TABLE OF CONTENTS

1	DATA DESCRIPTION.....	3
1.1	Parameters	3
1.2	Sample Data File.....	4
1.3	File Information	5
1.3.1	Format	5
1.3.2	Data File	5
1.3.3	Ancillary Files	5
1.3.4	Naming Convention	5
1.4	Spatial Information	6
1.4.1	Coverage	6
1.4.2	Projection.....	6
1.4.3	Resolution.....	7
1.4.4	Geolocation	7
1.5	Temporal Information	8
1.5.1	Coverage	8
1.5.2	Resolution.....	8
2	DATA ACQUISITION AND PROCESSING	8
2.1	Background.....	8
2.2	Acquisition.....	9
2.3	Sources.....	9
2.4	Processing	9
2.4.1	Eight-Day CMG Snow Cover	10
2.4.2	Eight-Day CMG Cloud Obscured.....	10
2.4.3	Eight-Day CMG Clear Index Extent	10
2.4.4	Inland Water	10
2.4.5	Ocean.....	11
2.4.6	Night.....	11
2.4.7	Antarctica.....	11
2.5	Quality Information	11
2.6	Errors	11
2.7	Instrumentation	12
2.7.1	Description.....	12
2.7.2	Calibration	13
3	VERSION HISTORY.....	13
4	SOFTWARE AND TOOLS.....	14
5	RELATED WEBSITES.....	14
6	CONTACTS AND ACKNOWLEDGMENTS.....	14
7	REFERENCES	15
8	DOCUMENT INFORMATION.....	15

8.1	Publication Date	15
8.2	Date Last Updated	15

1 DATA DESCRIPTION

This global data set is produced by mapping eight-day MYD10A2 tiles to the MODIS climate modeling grid (CMG). MYD10A2 observations at 500 m are mapped into 0.05° CMG (~ 5 km) grid cells, binned by observation type (e.g. snow, cloud, ocean), and counted to identify the most frequently occurring feature type. Snow cover is detected using the Normalized Difference Snow Index (NDSI) in a preceding product (MYD10_L2), which is ultimately carried forward to this product. Snow-covered land typically has a very high reflectance in visible bands and very low reflectance in the shortwave infrared; the NDSI reveals the magnitude of this difference. The Scientific Data Sets (SDSs) included with this product are described in Table 1 and a sample image of the data is shown in Figure 1.

The terms “Version 61” and “Collection 6.1” are used interchangeably in reference to this release of MODIS data.

1.1 Parameters

Table 1. SDS Details

Parameter	Description	Values
Eight_Day_CMG_Snow_Cover	The maximum 8-day percentage of snow cover mapped in the CMG cell.	0-100: eight-day, maximum snow cover percentage 107: lake ice 111: night 237: inland water 239: ocean 250: cloud obscured water 253: data not mapped 255: fill
Eight_Day_CMG_Cloud_Obscured	The percentage of persistent 8-day cloud clover mapped in the CMG cell.	0-100: percent of cell obscured by clouds 107: lake ice 111: night 237: inland water 239: ocean 250: cloud obscured water 253: data not mapped 255: fill

Parameter	Description	Values
Eight_Day_CMG_Clear_Index	The percent of non-cloud observations mapped to the CMG cell. Note: A clear index of '0' does not indicate cloud-free conditions, but rather indicates that none of the MYD10A2 input cells were completely cloud obscured.	0-100: clear index 107: lake ice 237: inland water 239: ocean 250: cloud obscured water 253: data not mapped 255: fill
Snow_Spatial_QA	Basic quality assurance indicator	0: good quality 1: other quality 237: inland water 239: ocean 252: Antarctica mask 253: not mapped 255: fill
Lat	Upper left X coordinate for each grid cell in degrees north.	Coordinate value range 90.0° to -90.0°
Lon	Upper left Y coordinate for each grid cell in degrees east.	Coordinate value range -180.0° to 180.0°

1.2 Sample Data File

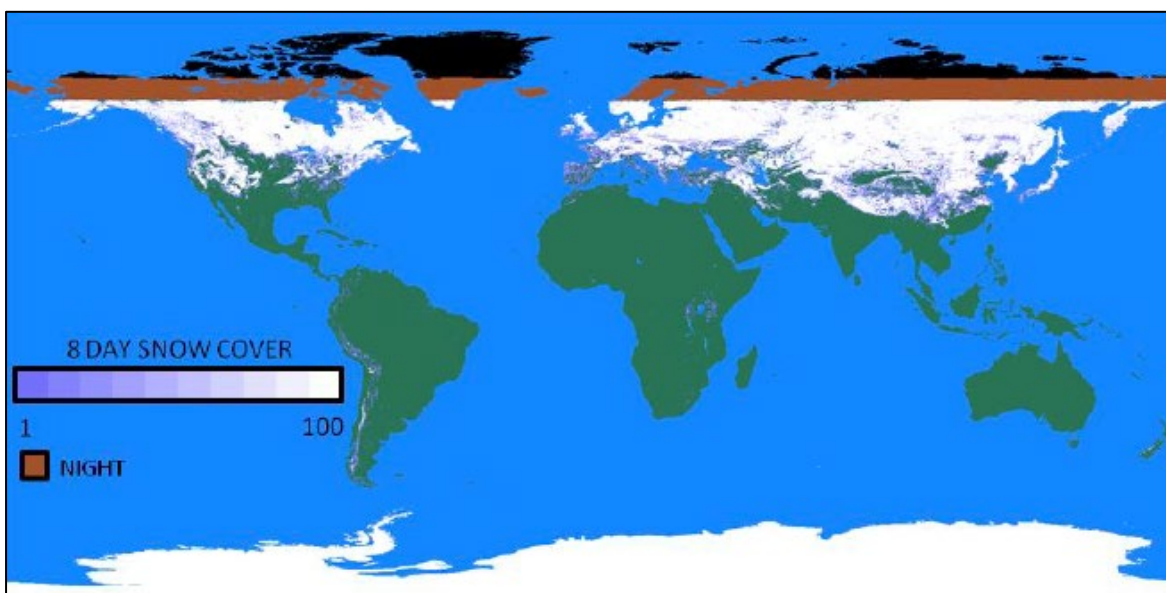


Figure 1. This MOD10C2 (MODIS/Terra) snow map shows the maximum percentage of eight-day snow cover mapped to a 0.05° CMG. The data was observed from 1 Jan thru 8 Jan 2003.

1.3 File Information

1.3.1 Format

Data are provided in HDF-EOS2 format and are stored as 8-bit unsigned integers. For software and more information, visit the [HDF-EOS](#) website.

1.3.2 Data File

As shown in Figure 2, each data file includes three data fields (Eight_Day_CMG_Clear_Index, Eight_Day_CMG_Cloud_Obscured, and Eight_Day_CMG_Snow_Cover), one data quality field (Snow_Spatial_QA), two geolocation fields (Lat and Lon), and three metadata fields (ArchiveMetadata.0, CoreMetadata.0, and StructMetadata.0)

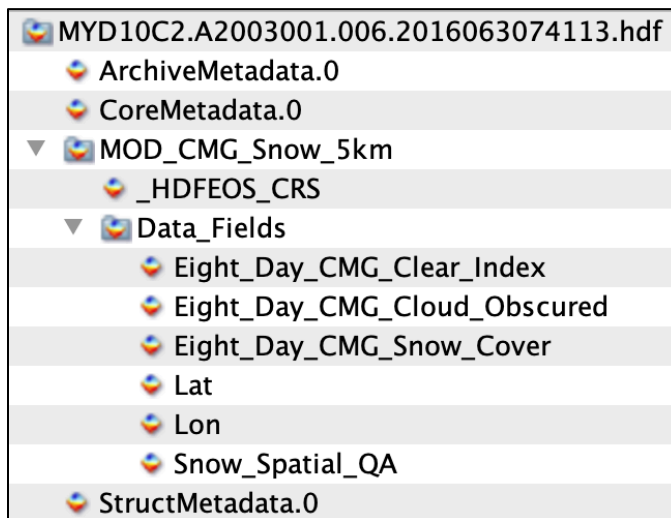


Figure 2. This figure shows the fields included in each data file as displayed with Panoply software.

1.3.3 Ancillary Files

A browse image file (.jpg) and metadata file (.xml) are provided with each data file.

1.3.4 Naming Convention

Files are named according to the following convention and as described in Table 2.

File naming convention:

MYD[PID].A[YYYY][DDD].[VWV].[yyyy][ddd][hhmmss].hdf

Table 2. File Name Variables

MYD	MODIS/Aqua
PID	Product ID
A	Acquisition date follows
YYYY	Acquisition year
DDD	Acquisition day of year
VV	Version (Collection) number
yyyy	Production year
ddd	Production day of year
hhmmss	Production hour/minute/second in GMT
.hdf	HDF-EOS formatted data file

File Name Example

MYDC2.A2003001.061.2019151122901.hdf

Note: Data files contain important metadata including global attributes that are assigned to the file and local attributes like coded integer keys that provide details about the data fields. In addition, each HDF-EOS data file has a corresponding XML metadata file (.xml) which contains some of the same internal metadata as the HDF-EOS file plus additional information regarding user support, archiving, and granule-specific post-production.

1.4 Spatial Information

1.4.1 Coverage

Coverage is global. Aqua's sun-synchronous, near-polar circular orbit is timed to cross the equator from south to north (ascending node) at approximately 1:30 P.M. local time. Complete global coverage occurs every one to two days (more frequently near the poles). The following sites offer tools that track and predict Aqua's orbital path:

- [Daily Aqua Orbit Tracks](#), Space Science and Engineering Center, University of Wisconsin-Madison
- [NASA LaRC Satellite Overpass Predictor](#) (includes viewing zenith, solar zenith, and ground track distance to specified lat/lon)

1.4.2 Projection

MODIS CMG data sets are provided in geographic latitude/longitude coordinates. For additional details about the MODIS CMG see the [NASA MODIS Lands | MODIS Grids](#) web page.

1.4.3 Resolution

0.05°

1.4.4 Geolocation

The following tables provide information for geolocating this data set.

Table 3. Projection Details

Region	Global
Geographic coordinate system	WGS84
Projected coordinate system	Geographic Lat/Lon
Longitude of true origin	0°
Latitude of true origin	0°
Scale factor at longitude of true origin	1.0
Datum	WGS 84
Ellipsoid/spheroid	WGS 84
Units	degrees
False easting	0°
False northing	0°
EPSG code	4326
PROJ4 string	+proj=longlat +datum=WGS84 +no_defs
Reference	https://epsg.io/4326

Table 4. Grid Details

Region	Global
Grid cell size (x, y pixel dimensions)	0.05°
Number of rows	3600
Number of columns	7200
Nominal gridded resolution	0.05°
Grid rotation	N/A
Geolocated upper left point in grid	-180.0°(x), 90.0°(y)
Geolocated lower right point in grid	180.0°(x), -90.0°(y)

1.5 Temporal Information

1.5.1 Coverage

MODIS Aqua data are available from 4 July 2002 to the present. However, because the NDSI depends on visible light, data are not produced when viewing conditions are too dark. In addition, anomalies over the course of the Aqua mission have resulted in minor data outages. If you cannot locate data for a particular date or time, check the [MODIS/Aqua Data Outages](#) web page.

1.5.2 Resolution

The temporal resolution is eight-days. Tiles are composited from data acquired during eight-day windows. Each year is comprised of 43 compositing periods. The first period begins on the first day of the year; the last period begins on day 361 and extends either two or three days into the following year (leap years vs non-leap years). Table 5 lists the days covered by each compositing period:

Table 5. Eight-day Compositing Periods

Period	Days	Period	Days	Period	Days	Period	Days
1	1-8	13	97-104	25	193-200	37	289-296
2	9-16	14	105-112	26	201-208	38	297-304
3	17-24	15	113-120	27	209-216	39	305-312
4	25-32	16	121-128	28	217-224	40	313-320
5	33-40	17	129-136	29	225-232	41	321-328
6	41-48	18	137-144	30	233-240	42	329-336
7	49-56	19	145-152	31	241-248	43	337-344
8	57-64	20	153-160	32	249-256	44	345-352
9	65-72	21	161-168	33	257-264	45	353-360
10	73-80	22	169-176	34	265-272	46	361-368 ¹
11	81-88	23	177-184	35	273-280	—	—
12	89-96	24	185-192	36	281-288	—	—

¹Includes 2 or 3 days from the next year.

2 DATA ACQUISITION AND PROCESSING

2.1 Background

This data set provides global maps of eight-day snow cover, eight-day cloud cover, and eight-day clear index. The snow map and cloud map represent the maximum percentage of snow cover and

persistent cloud cover observed in each CMG cell during the eight-day period. The clear index map reports the fraction of non-cloud observations, thus providing an estimate of the amount of land surface that was observable during the eight-day period.

2.2 Acquisition

MODIS scans the entire globe every one to two days. As such, most locations on Earth are imaged at least once per day and more frequently where swaths overlap, such as near the poles. Aqua's sun-synchronous, near-circular polar orbit is timed to cross the equator from south to north (ascending node) at approximately 1:30 P.M. local time.

Ongoing changes in the Aqua orbit

The Aqua flight operations team completed [mission maneuvers](#) related to maintaining a 1:30 PM MLT equator crossing and 705 km orbit altitude on March 18, 2021. In July 2021, Aqua began drifting to a later MLT. In January 2022, Aqua will begin its constellation exit by stopping all maneuvers except collision avoidance maneuvers and will exceed a 1:45 PM MLT crossing in February 2023. MLT will continue to drift after this, reaching 3:50 PM around August 2026. Aqua MODIS will remain operational and generate the full suite of products until the end of the mission in August 2026.

Later crossing times for an afternoon platform like Aqua mean lower solar elevations leading to more prevalent shadows. This decrease in orbit altitude alters the spatial coverage of the sensor including possible gaps in spatial sampling, decreased spatial coverage, and higher spatial resolution. Products are mostly expected to be science quality except for reduced grid size (from lower altitude) and without a strict 16-day repeat of observations (from drift and changing orbit).

Details on the impact of the Constellation Exit on the quality of the product are being compiled and [will be posted when available](#).

2.3 Sources

Table 6 lists the data set and parameter inputs to the MODIS CMG binning algorithm.

Table 6. Inputs to the MYD10C2 CMG Binning Algorithm

Product ID	Long Name	Parameter
MYD10A2	MODIS/Aqua Snow Cover 8-Day L3 Global 500m SIN Grid, Version 61	Maximum_Snow_Extent

2.4 Processing

The MYD10C2 CMG binning algorithm is a revised version of the MYD10C1 binning algorithm (see the [MYD10C1 User Guide](#) for more details) that has been adapted to utilize MYD10A2 eight-day data as input. The MYD10C2 algorithm calculates the maximum snow cover extent, persistent cloud cover extent, and associated quality values mapped to CMG grid cells for an eight-day period. The MYD10C2 algorithm maps 500 m MYD10A2 'Maximum_Snow_Extent' observations

into 0.05° (~ 5 km) CMG cells. Approximately 100 MYD10A2 'Maximum_Snow_Extent' observations are mapped into each CMG cell. The mapped observations are binned by feature type (snow, cloud, ocean, etc.) and counted to identify the most frequently occurring feature type in the CMG cell. The observation counts are then used to determine the feature type assigned to the CMG cell. Parameter processing details are provided below.

2.4.1 Eight-Day CMG Snow Cover

The maximum extent of snow cover mapped to each CMG cell is calculated by computing the ratio of MYD10A2, 500 m snow-cover observations to the total number of land observations that were mapped into the CMG cell. The result is expressed as the percentage of maximum snow observations mapped in the CMG cell. The valid range of snow cover extent is 0-100%.

2.4.2 Eight-Day CMG Cloud Obscured

The extent of cloud cover mapped to each CMG cell is calculated by computing the ratio of MYD10A2, 500 m cloud-cover observations to the total number of land observations that were mapped into the CMG cell. The result is expressed as the percentage of persistent cloud observations mapped in the CMG cell. The valid range of cloud cover extent is 0-100%. Note: MYD10A2 cells only report cloud if the cell was obscured by clouds on all eight days of the period.

2.4.3 Eight-Day CMG Clear Index Extent

The clear index is calculated by computing the fraction of all land observations in the cell that were observed under clear sky conditions. The index measures the amount of persistent cloud that was present in a grid cell for eight consecutive days. A high clear index indicates that relatively few input cells were completely cloud obscured. Low values indicate low confidence in the snow cover fraction due to extensive, persistent cloud cover. Note: the MYD10A2 algorithm infers a surface condition if any clear-sky views are available. A clear index = '0' does not indicate cloud-free conditions, but only that none of the MYD10A2 input cells were completely cloud obscured.

2.4.4 Inland Water

Inland water bodies are identified using the inland water bit flag in the MYD10A1 'NDSI_Snow_Cover_Algorithm_Flags_QA' array. The number of water body observations in a CMG grid cell are counted and tallied. If the water body has more lake ice observations than open water observations, it is interpreted as lake ice. In the output data arrays, pixels with inland water are assigned a value '237', pixels with lake ice are assigned a value '107', and cloud obscured lakes are assigned a value of '250'.

2.4.5 Ocean

A CMG-specific land base mask was used with the binning algorithm. This 0.05° land mask was derived from the [University of Maryland 1km global land cover data set](#). If a cell contains less than 12% land cover, it is considered ocean. That threshold was selected as a balance that minimized snow errors along coasts yet was sensitive to mapping snow along coasts.

2.4.6 Night

The polar darkness extent is based on the latitude of the CMG cell nearest the equator that is full of night observations. All CMG cells poleward of that latitude are filled as night. This approach was adopted so that a neat demarcation of night and day is visible in the CMG.

2.4.7 Antarctica

To improve the visual quality of the data, Antarctica has been mapped as 100% snow. As such, this data set should not be used to map snow in Antarctica. For users who wish to evaluate Antarctica, the [MYD10_L2](#) data set offers higher resolution and contains more data and information about accuracy and error

2.5 Quality Information

The 'Snow_Spatial_QA' data array indicates if the input data are valid (within the valid data range) or invalid (outside the valid data range) or if a special condition like polar darkness existed. The quality assurance (QA) value is determined by a count of valid and invalid values tallied in a grid cell. This simple method of estimating QA is used because there is no QA data generated or stored in the MYD10A2 product. The default QA value is 'good quality'; if the majority of observations in a grid cell contain invalid data, the QA value is set to 'other quality'.

2.6 Errors

The NDSI technique has proven to be a robust indicator of snow cover. Numerous investigators have utilized MODIS snow cover data sets and reported accuracy in the range of 88% to 93%. This data set provides a synoptic view of maximum snow cover extent during eight-day windows, plus persistent cloud cover and optionally the clear index. Snow cover and cloud cover are written to separate data arrays so that users can consider how best to interpret and use the snow cover map and whether to combine it with the cloud cover data.

Snow commission errors (detecting snow where there is no snow) are typically associated with cloud cover and may appear on any day in conjunction with clouds. These errors may spread in

spatial extent over the course of eight days and manifest as low-percentage, maximum snow fractions. A majority of the snow commission errors can be filtered by interpreting snow cover with a value of NDSI < 20 as snow-free. However, this approach may mask out actual snow along the periphery of snow-covered regions.

The algorithm for this data set does not screen for errors; QA values are only provided to indicate whether the input data were valid or invalid or if a special condition like polar darkness was encountered. Users should analyze the snow cover map and choose for themselves an interpretation that minimizes the most probable errors and yet applies the data in a reasonable manner to track maximum snow cover extent.

Snow errors are ultimately propagated from MYD10_L2 to MYD10A1 to MYD10A2, and then into this data set. For more information about potential error sources in the input data, see the 'MODIS Snow Products Collection 6.1 User Guide' (Riggs et al., 2019).

2.7 Instrumentation

2.7.1 Description

The MODIS instrument provides 12-bit radiometric sensitivity in 36 spectral bands ranging in wavelength from 0.4 μm to 14.4 μm . Two bands are imaged at a nominal resolution of 250 m at nadir, five bands at 500 m, and the remaining bands at 1000 m. A ± 55 degree scanning pattern at an altitude of 705 km achieves a 2330 km swath with global coverage every one to two days.

The scan mirror assembly uses a continuously rotating, double-sided scan mirror to scan ± 55 degrees and is driven by a motor encoder built to operate 100 percent of the time throughout the six-year instrument design life. The optical system consists of a two-mirror, off-axis afocal telescope which directs energy to five refractive objective assemblies, one each for the visible, near-infrared, shortwave infrared, middle-wavelength infrared, and long-wavelength infrared spectral regions.

The MODIS instruments on the Terra and Aqua space vehicles were built to NASA specifications by Santa Barbara Remote Sensing, a division of Raytheon Electronics Systems. Table 7 contains the instruments' technical specifications:

Table 7. MODIS Technical Specifications

Variable	Description
Orbit	705 km altitude, 1:30 P.M. ascending node (Aqua), sun-synchronous, near-polar, circular
Scan Rate	20.3 rpm, cross track
Swath Dimensions	2330 km (cross track) by 10 km (along track at nadir)
Telescope	17.78 cm diameter off-axis, afocal (collimated) with intermediate field stop
Size	1.0 m x 1.6 m x 1.0 m
Weight	228.7 kg
Power	162.5 W (single orbit average)
Data Rate	10.6 Mbps (peak daytime); 6.1 Mbps (orbital average)
Quantization	12 bits
Spatial Resolution	250 m (bands 1-2) / 500 m (bands 3-7) / 1000 m (bands 8-36)
Design Life	6 years

2.7.2 Calibration

MODIS has a series of on-board calibrators that provide radiometric, spectral, and spatial calibration of the MODIS instrument. The blackbody calibrator is the primary calibration source for thermal bands between 3.5 μm and 14.4 μm , while the Solar Diffuser (SD) provides a diffuse, solar-illuminated calibration source for visible, near-infrared, and short wave infrared bands. The Solar Diffuser Stability Monitor tracks changes in the reflectance of the SD with reference to the sun so that potential instrument changes are not incorrectly attributed to changes in this calibration source. The Spectroradiometric Calibration Assembly provides additional spectral, radiometric, and spatial calibration.

MODIS uses the moon as an additional calibration technique and for tracking degradation of the SD by referencing the illumination of the moon since the moon's brightness is approximately the same as that of the Earth. Finally, MODIS deep space views provide a photon input signal of zero, which is used as a point of reference for calibration.

For additional details about the MODIS instruments, see NASA's [MODIS | About](#) web page.

3 VERSION HISTORY

See the [MODIS | Data Versions](#) page for the history of MODIS snow and sea ice data versions.

4 SOFTWARE AND TOOLS

The following sites can help you identify the right MODIS data for your study:

- [NASA's Earth Observing System Data and Information System | Near Real-Time Data](#)
- [NASA Goddard Space Flight Center | MODIS Land Global Browse Images](#)
- [MODIS Land Discipline Group \(MODLAND\) Tile Calculator](#)
- [Tile Bounding Coordinates for the MODIS Sinusoidal Grid](#)

The following resources are available to help users work with MODIS data:

- [The HDF-EOS to GeoTIFF Conversion Tool \(HEG\)](#) can reformat, re-project, and perform stitching/mosaicing and subsetting operations on HDF-EOS objects.
- [HDFView](#) is a simple, visual interface for opening, inspecting, and editing HDF files. Users can view file hierarchy in a tree structure, modify the contents of a data set, add, delete and modify attributes, and create new files.
- [What is HDF-EOS? an NSIDC FAQ](#)
- [The MODIS Conversion Toolkit \(MCTK\) plug-in for ENVI](#) can ingest, process, and georeference every known MODIS data set, including products distributed with EASE-Grid projections. The toolkit includes support for swath projection and grid reprojection and comes with an API for large batch processing jobs.

5 RELATED WEBSITES

The following resources provide additional information about MODIS Version 6.1 data, including known problems, production schedules, and future plans:

- [The MODIS Snow and Sea Ice Global Mapping Project](#)
- [NASA LDOPE | MODIS/VIIRS Land Product Quality Assessment](#)
- [MODIS Land Team Validation | Status for Snow Cover/Sea Ice \(MOD10/29\)](#)

6 CONTACTS AND ACKNOWLEDGMENTS

George Riggs

NASA Goddard Space Flight Center (GSFC)
Greenbelt, MD

Dorothy Hall

ESSIC / University of Maryland
College Park, MD

Miguel Roman

NASA Goddard Space Flight Center (GSFC)
Greenbelt, MD

7 REFERENCES

Hall, D.K., Riggs, G.A. and Salomonson, V.V. 2001. Algorithm Theoretical Basis Document (ATBD) for MODIS Snow and Sea Ice-Mapping Algorithms. [Guide](#). NASA Goddard Space Flight Center, Greenbelt, MD.

Riggs, G.A., Hall, D.K. and Roman, M.O. 2015. VIIRS Snow Cover Algorithm Theoretical Basis Document (ATBD). NASA Goddard Space Flight Center, Greenbelt, MD. (See [PDF](#))

Riggs, G.A., Hall, D.K. and Roman, M.O. 2019. MODIS Snow Products Collection 6.1 User Guide. NASA Goddard Space Flight Center, Greenbelt, MD. (See [PDF](#))

8 DOCUMENT INFORMATION

8.1 Publication Date

March 2021

8.2 Date Last Updated

December 2021