



VIIRS/[NPP|JPSS1|JPSS2] Sea Ice Cover 6-Min L2 Swath 375m, Version 2

USER GUIDE

How to Cite These Data

As a condition of using these data, you must include a citation:

VNP29:

Riggs, G. A., Tschudi, M. A., and D. K. Hall. 2023. *VIIRS/NPP Sea Ice Cover 6-Min L2 Swath 375m, Version 2*. [Indicate subset used]. Boulder, Colorado USA. NASA National Snow and Ice Data Center Distributed Active Archive Center. <https://doi.org/10.5067/GKJ486GAV3HH>. [Date Accessed].

VJ129:

Riggs, G. A., Tschudi, M. A., and D. K. Hall. 2023. *VIIRS/JPSS1 Sea Ice Cover 6-Min L2 Swath 375m, Version 2*. [Indicate subset used]. Boulder, Colorado USA. NASA National Snow and Ice Data Center Distributed Active Archive Center. <https://doi.org/10.5067/LZB54MLNK98U>. [Date Accessed].

VJ229:

Riggs, G. A., Tschudi, M. A., and D. K. Hall. 2025. *VIIRS/JPSS2 Sea Ice Cover 6-Min L2 Swath 375m, Version 2*. [Indicate subset used]. Boulder, Colorado USA. NASA National Snow and Ice Data Center Distributed Active Archive Center. <https://doi.org/10.5067/6GM1HN7KJSFX>. [Date Accessed].

FOR QUESTIONS ABOUT THESE DATA, CONTACT NSIDC@NSIDC.ORG

FOR CURRENT INFORMATION, VISIT <https://nsidc.org/data/VNP29>, <https://nsidc.org/data/VJ129>, AND <https://nsidc.org/data/VJ229>



National Snow and Ice Data Center

TABLE OF CONTENTS

1	DATA DESCRIPTION.....	2
1.1	Parameters	2
1.1.1	Interpreting the Algorithm_QA_Flags parameter.....	3
1.2	File Information	4
1.2.1	Format	4
1.2.2	File Contents	4
1.2.3	Naming Convention	5
1.3	Spatial Information.....	5
1.3.1	Coverage.....	6
1.3.2	Resolution.....	6
1.3.3	Geolocation	6
1.4	Temporal Information.....	6
1.4.1	Coverage.....	6
1.4.2	Resolution.....	7
2	DATA ACQUISITION AND PROCESSING	7
2.1	Background.....	7
2.2	Instrumentation	7
2.3	Inputs.....	8
2.4	Processing	8
2.5	Quality Assessment	9
2.6	Interpretation of Snow Cover Detection Accuracy, Uncertainty and Errors.....	10
3	VERSION HISTORY.....	11
4	RELATED DATA SETS	11
5	RELATED WEBSITES.....	11
6	REFERENCES	11
7	DOCUMENT INFORMATION.....	12
7.1	Publication Date.....	12
7.2	Date Last Updated	12

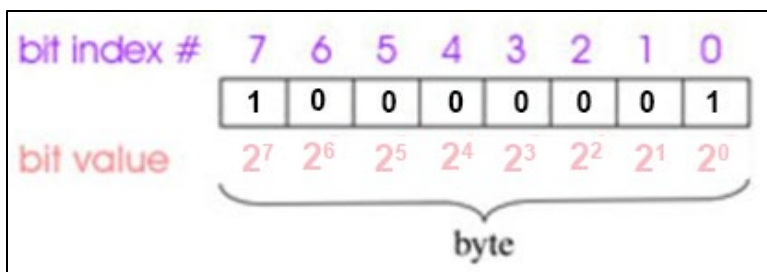


Figure 1. Decoding a bit flag. Bits store values. Bit locations within a byte are numbered, i.e., indexed. Bit positions are indexed from right (0) to left (7), and each bit stores the result (0 or 1) of a screen test. The bit values are the index in base 2 and solve respectively to 1, 2, 4, 8, 16, 32, 64, and 128. In this example, the decimal value 129 is equal to 128+1 (or 2^7+2^0), meaning that the conditions specified in Bit 7 and Bit 0 were encountered (see Table 1).

1.2 File Information

1.2.1 Format

These swath L2 products are available in NetCDF-4/HDF5 and use [NetCDF Climate and Forecast \(CF-1.6\) conventions](#) for global and local attributes and to geolocate the variables.

1.2.2 File Contents

As shown in Figure 2, each data file includes one data field (SeaIceCover), two data quality fields (SeaIceCover_Basic_QA and Algorithm_QA_Flags), and two geolocation data fields (latitude and longitude). All data fields represent 6 minutes of scans, which are two-dimensional, and are typically 6464 lines by 6400 pixels in size. Although the number of pixels in each swath remains constant, the number of lines may vary, depending on the length of the swath.

Name	Long Name	Type
VJ129.A2021092.2354.002.2021093063745.nc	VIIRS Sea Ice Cover	Local File
▼ GeolocationData	GeolocationData	—
latitude	Latitude data	Geo2D
longitude	Longitude data	Geo2D
▼ SealceCoverData	SealceCoverData	—
Algorithm_QA_Flags	Algorithm QA Flags for Ice Cover	Geo2D
SealceCover	Sea Ice Cover	Geo2D
SealceCover_Basic_QA	Basic QA Ice Cover	Geo2D

Figure 2. *SealceCoverData* and *GeolocationData* groups and their respective data fields included in each VNP29, VJ129, and VJ229 file, as displayed with Panoply software.

NetCDF-4/HDF5 data files contain metadata including global attributes, which store important details about the data, and local attributes such as keys to data fields. In addition, each data file has a corresponding XML (.xml) metadata file. For detailed information about metadata fields and values, consult the [SNPP/JPSS1 VIIRS Sea Ice Cover Products Collection 2 User Guide](#).

1.2.3 Naming Convention

Files are named according to the following convention and as described in Table 2.

File naming convention:

V[SAT]29.A[YYYY][DDD].[HHMM].[VV].[yyyy][ddd][hhmmss].nc

Table 2. File Name Variables

SAT	Satellite designator: NP (Suomi-NPP), J1 (JPSS-1), or J2 (JPSS-2)
29	Product ID
A	Acquisition date follows
YYYY	Acquisition year
DDD	Acquisition day of year
HHMM	Acquisition hour and minute in Greenwich Mean Time (GMT)
VV	Version (Collection) number
yyyy	Production year
ddd	Production day of year
hhmmss	Production hour/minute/second in GMT
.nc	NetCDF formatted data file

File name examples:

VNP29.A2019195.2224.002.2020281100047.nc
 VJ129.A2021101.0730.002.2021101124615.nc
 VJ229.A2025182.2354.002.2025183063956.nc

1.3 Spatial Information

VNP29, VJ129, and VJ229 data files contain six minutes of swath data (a scene), during which the instrument sweeps out 202 (and occasionally 203) cross-track scans along a 12 km viewing path. VIIRS Imagery-resolution (I) bands are equipped with 32 detectors and thus the L2 scenes typically contain 6,464 I-band pixels in the along-track direction. The instrument's ±56.28° Earth-view scan width produces 6,400 I-band pixels in the cross-track direction.

VIIRS orbits the globe about 14 times a day and as such, most locations on Earth are imaged at least once per day and more frequently where swaths overlap (at higher latitudes). All three satellites complete a sun-synchronous, near-circular polar orbit in sequence, each crossing the equator within a 75-minute span. JPSS-2 crosses the equator from south to north at approximately 1:10 p.m. local time (and from north to south at 1:10 a.m.), followed by S-NPP at approximately 1:30 p.m. local time, and finally JPSS-1 at approximately 2:20 p.m. local time.

The following sites offer tools that track and predict each satellite's orbital path:

- [Space Science and Engineering Center \(SSEC\) Polar Orbit Tracks](#)
- [NASA LaRC Satellite Overpass Predictor](#) (includes viewing zenith, solar zenith, and ground track distance to specified lat/lon)

1.3.1 Coverage

Coverage is global, however sea ice is only estimated for ocean pixels poleward of 40°N and 50°S.

1.3.2 Resolution

VIIRS I-bands have a spatial resolution of 375 m at nadir.

1.3.3 Geolocation

These L2 swath data are not projected. Latitude and longitude for each pixel in a swath are stored as auxiliary coordinate variables in the *GeolocationData* group found in each VNP29, VJ129, and VJ229 file. The coordinate variables, attributes and datasets follow netCDF CF-1.6 conventions for geolocation.

1.4 Temporal Information

1.4.1 Coverage

VNP29 data are available from 19 January 2012 to present.

VJ129 data are available from 5 January 2018 to present.

VJ229 data are available from 10 February 2023 to present

Because computation of the NDSI depends on visible light, data are not produced for the night phase of each orbital period or for those portions of fall and winter in polar regions when viewing conditions are too dark. If you cannot locate data for a particular date or time, check the [MODIS & VIIRS Data Outages](#) Web page.

1.4.2 Resolution

Each data file contains six minutes of an orbital swath.

The satellites orbit the Earth from pole-to-pole approximately every 101 minutes, observing low latitude locations twice per day (albeit only once during daylight). At higher latitudes, observations are more frequent due to overlapping swaths (up to 14 per day near the poles). The satellites repeat the exact orbit every 16 days.

2 DATA ACQUISITION AND PROCESSING

2.1 Background

The sea ice detection algorithm in VIIRS Collection 2.0 utilizes the Normalized Difference Snow Index (NDSI) to classify the ocean surface poleward of 40°N and 50°S as ice-covered or ice-free. Unlike the snow cover products, no fractional ice cover is detected within a pixel. For a detailed description of the VIIRS sea ice detection algorithm, see Tschudi et al. (2017). The following sections offer a brief outline of the process.

2.2 Instrumentation

The Visible Infrared Imaging Radiometer Suite (VIIRS) instrument collects visible and infrared imagery on 22 spectral bands ranging from 0.412 to 12.01 micrometers. Sixteen moderate resolution bands (M-bands), five imaging resolution bands (I-bands), and one panchromatic day-night band (DNB) acquire spatial resolutions at nadir of 750 m, 375 m, and 750 m, respectively (see the [VIIRS Bands and Bandwidth](#) Technical Reference for details on wavelength and resolution of individual bands). More details about the VIIRS instrument are available in the [VIIRS Sensor Data Record User Guide](#) and the [JPSS VIIRS Radiometric Calibration Algorithm Theoretical Basis Document](#).

Table 3 lists technical specifications for the VIIRS instrument:

Table 3. VIIRS Technical Specifications

Variable	Description
Orbit	829 km (nominal) altitude, 1:30 p.m. mean local solar time, sun-synchronous, polar, near-circular (Suomi-NPP orbit; JPSS-2 and JPSS-1 fly on the same orbit, with the former preceding by 20 minutes and the latter lagging by 50 minutes)
Scan Rate	1.779 sec/rev or 202.3 deg/sec

Variable	Description
Swath Dimensions	3060 km (cross track) by ~12 km (along track at nadir) – nearly global coverage every day
Size	1.34 m x 1.41 m x 0.85 m
Weight	275 kg
Power	319 W (single orbit average)
Data Rate	7.674 Mbps (average), 10.5 Mbps (max)
Quantization	12 bits
Spatial Resolution (at nadir)	375 m (Imagery resolution bands) 750 m (Moderate resolution bands)
Design Life	7 years

2.3 Inputs

Table 4 lists the data products that are input to the VIIRS sea ice detection algorithm. These data are used to check the quality of radiance measurements, identify land and water pixels, detect ice/snow on water, and compute screen pass/fail thresholds:

Table 4. VIIRS data product inputs to the V[NP|J1]29 algorithm

ESDT	Variables (description)	Center wavelength	Spatial resolution
V[NP J1 J2]02IMG	I01 (reflectance), I01_quality_flags	0.640 μm	375 m
	I02 (reflectance), I02_quality_flags	0.865 μm	
	I03 (reflectance), I03_quality_flags	1.61 μm	
V[NP J1 J2]03IMG	latitude, longitude, solar_zenith (angle), land_water_mask	N/A	375 m
V[NP J1 J2]35_L2	QF1_VIIRSCMIP (cloud confidence flag)	N/A	750 m

2.4 Processing

Similar to the MODIS sea ice algorithm and analogous to the VIIRS snow cover algorithm, the VIIRS sea ice cover algorithm utilizes the NDSI to differentiate sea ice from open water. Like snow-covered land, snow-covered sea ice has a strong visible reflectance and strong short-wave IR absorption characteristics, especially compared with open water. Additionally, some snow/cloud confusion can be alleviated using the NDSI.

To detect sea ice, the algorithm computes the NDSI using VIIRS image-quality bands I1 (0.64 μm) and I3 (1.61 μm) as follows:

$$NDSI = \frac{\text{band } I1 - \text{band } I3}{\text{band } I1 + \text{band } I3}$$

If $NDSI \geq 0.4$ and visible reflectance in band I1 is > 0.11 , the pixel is set to sea ice. These thresholds were established based on known reflectance values for a variety of sea ice types (Tschudi et al., 2017).

The algorithm is applied to all ocean pixels poleward of 40°N and 50°S latitude, and in daylight determined as solar zenith angle $< 85^\circ$. The land/water mask from the geolocation product V[NP|J1|J2]03IMG is used to guide processing over oceans. The cloud confidence flag from the V[NP|J1|J2]35_L2 is used for cloud masking. Cloud mask performance was improved through use of a 1 km rolling gridded snow input and a 1 km vegetation index (VI) file, and algorithm improvements for better delineation of snow at higher latitudes in C2 as described in [VIIRS Land C2 Changes](#). If the cloud confidence flag has a setting of “confident cloudy”, “probably cloudy”, or “probably clear” the pixel is masked as “cloud”. If the cloud confidence flag setting is “confident clear” the pixel is processed for sea ice cover. The reflectance data is checked for nominal quality; if unusable data is found it is flagged and the pixel is skipped, otherwise processing continues. The VIIRS bands are also checked for noisy detectors. If a noisy detector is encountered the reflectance from the noisy detector is replaced by the mean reflectance of the corresponding detectors in the preceding and following scan lines. Data screens are applied and QA bit flags are set for pixels processed for sea ice cover and for other conditions, e.g. solar zenith angle.

The results of the screens are coded into a bit flag which is then written to the Algorithm_QA_Flags variable. All data screens and masks are applied within the algorithm using data read from the input products listed in Table 4. No ancillary data are used. Refer to the [SNPP/JPSS1 VIIRS Sea Ice Cover Products Collection 2 User Guide](#) for more details on the individual data screens.

2.5 Quality Assessment

Two quality assessment parameters are available: the Algorithm_QA_Flags, which reports results of the individual data screens, and SeaIceCover_Basic_QA, which gives a qualitative estimate of the algorithm result for the pixel.

At the pixel level, the SeaIceCover_Basic_QA array is initialized to “best” and is adjusted based on the quality of the L1B input data and the solar zenith angle (SZA) screen (which is reported in the Algorithm_bit_flags_QA array). If the visible reflectance data is outside the range of 5%-100% but still usable, the QA value is set to “good”. If the SZA is between 70° and 85°, the QA value is set to “poor” to indicate high uncertainty due to low illumination. If input data is unusable, the QA

value is set to “other”. The “bad” QA flag indicated in the data field attributes is reserved for future use and is currently not used in the algorithm.

2.6 Interpretation of Snow Cover Detection Accuracy, Uncertainty and Errors

The VIIRS sea ice algorithm identifies sea ice by its reflectance characteristics in the visible and near IR and its sharp contrast to open water. The targeted uncertainty of these NASA sea ice cover products is 5%, i.e., the product should correctly classify 95% of the viewable surface as either sea ice or open water.

The darkness of polar winters will be a limiting factor in the use of visible channels. Otherwise, a major caveat with the sea ice algorithm is that it is applicable only to clear-sky conditions. Inadequate cloud masking, by either an overly conservative cloud mask or cloud/ice confusion that results in ice being flagged as cloud, may result in significant error in estimating the presence of sea ice.

The confusion between clouds and sea ice is similar to the MODIS Collection 6.1 sea ice products. Errors most commonly occur when: 1) the cloud mask does not correctly flag cloudy or clear conditions; and 2) cloudiness at scales below 750 meters escapes detection by the 750 m resolution cloud mask. The cloud mask algorithm in V[NP|J1|J2]35_L2 uses a suite of tests to detect clouds that depends on whether the ocean surface is open water or has sea ice cover. If the initial underlying sea ice determination is incorrect, the wrong processing path is followed and erroneous cloud determinations are possible—for example, sea ice being flagged as “certain cloud.”

Small-scale clouds that escape detection by the 750 m cloud mask can be erroneously detected as sea ice because their spectral properties over open water appear similar to sea ice. This can result in sea ice errors of commission at the periphery of clouds, especially when scattered, popcorn-like clouds are present. Multilayer cloud formations can also confound the algorithm, if the layers consist of both warm and cold cloud types and cloud shadows fall on other clouds. When this occurs, regions of the cloud cover can escape detection by the cloud mask and then subsequently be classified as sea ice.

Errors in sea ice detection are also more probable in the summer when the algorithm can misclassify surface melt ponds as open water. Similar errors may occur where sea ice concentration is low. Furthermore, conditions which affect reflectance can impact the quality of the sea ice detection results. For example, low solar illumination due to high solar zenith angles, low light near the day/night terminator, and low reflectance combined with high SWIR that minimizes

the magnitude of the NDSI represent significant challenges to sea ice detection. These conditions and their implications are discussed in detail in the [SNPP/JPSS1 VIIRS Sea Ice Cover Products Collection 2 User Guide](#).

3 VERSION HISTORY

Table 5. Version History Summary

Version / Collection	Release Date	Description of Changes
V2 / C2	January 2026	Initial release of VJ229
V2 / C2	June 2023	The sea ice cover detection algorithm was revised to read detector QA flags in V[NP J1]02IMG to find noisy detectors and to average over noisy detectors VIIRS sea ice cover algorithms were made consistent with MODIS Collection 6.1 algorithms Initial release of VJ129
V1 / C1	07 November 2017	Initial release of VNP29

4 RELATED DATA SETS

[VIIRS data @ NSIDC](#)

[MODIS data @ NSIDC](#)

5 RELATED WEBSITES

[NASA Goddard Space Flight Center | Suomi-NPP VIIRS Land](#)

[MODIS Snow/Ice Global Mapping Project](#)

[Earthdata | VIIRS is Here](#)

6 REFERENCES

Riggs, G.A., M.A. Tschudi, and D.K. Hall. 2023. SNPP/JPSS1 VIIRS Sea Ice Cover Products Collection 2 User Guide. (See [PDF](#))

Tschudi, M.A., G.A. Riggs, D.K. Hall, and M.O. Román. 2017. Suomi-NPP VIIRS Sea Ice Cover Algorithm Theoretical Basis Document (ATBD). (See [PDF](#))

7 DOCUMENT INFORMATION

7.1 Publication Date

June 2023

7.2 Date Last Updated

January 2026