



# SMAPVEX08 PALS Brightness Temperature Data, Version 1

---

## USER GUIDE

### How to Cite These Data

As a condition of using these data, you must include a citation:

Yueh, S. 2015. *SMAPVEX08 PALS Brightness Temperature Data, Version 1*. [Indicate subset used].  
Boulder, Colorado USA. NASA National Snow and Ice Data Center Distributed Active Archive Center.  
<https://doi.org/10.5067/C1FCK9A0317Y>. [Date Accessed].

FOR QUESTIONS ABOUT THESE DATA, CONTACT [NSIDC@NSIDC.ORG](mailto:NSIDC@NSIDC.ORG)

FOR CURRENT INFORMATION, VISIT <https://nsidc.org/data/SV08PLTB>



National Snow and Ice Data Center

# TABLE OF CONTENTS

1	DETAILED DATA DESCRIPTION.....	2
1.1	Format .....	2
1.2	File Naming Convention .....	3
1.3	File Size.....	3
1.4	Volume .....	3
1.5	Spatial Coverage.....	3
1.5.1	Spatial Resolution .....	4
1.5.2	Projection and Grid Description .....	4
1.6	Temporal Coverage.....	4
1.6.1	Temporal Resolution.....	4
1.7	Parameter or Variable .....	4
1.7.1	Parameter Ranges.....	4
2	SOFTWARE AND TOOLS .....	4
3	DATA ACQUISITION AND PROCESSING.....	4
3.1	Theory of Measurements.....	4
3.2	Sensor or Instrument Description .....	5
3.3	Errors and Limitations.....	7
3.4	Version History .....	7
4	REFERENCES AND RELATED PUBLICATIONS .....	7
5	CONTACTS AND ACKNOWLEDGMENTS .....	7
6	DOCUMENT INFORMATION .....	7
6.1	Publication Date .....	7
6.2	Date Last Updated.....	8

# 1 DETAILED DATA DESCRIPTION

This data set contains brightness temperatures obtained by the Passive Active L-band System (PALS) microwave aircraft radiometer instrument as part of the Soil Moisture Active Passive Validation Experiment 2008 (SMAPVEX08).

## 1.1 Format

Table 1 provides descriptions for each column in the data files. An associated Extensible Markup Language (XML) metadata file is also provided for each data file.

Table 1. Data Column Descriptions

Column Number	Description
1	GMT hour of the day (decimal)
2	Latitude of the footprint center [°]
3	Longitude of the footprint center [°]
4	Incidence angle [°]
5	Vertically polarized brightness temperature [K]
6	Horizontally polarized brightness temperature [K]
7	Infrared surface temperature [°C]
8	Place holder (Note: Values for place holders vary).
9	Place holder (Note: Values for place holders vary).
10	The third Stokes parameter (to be calibrated)
11	1 for RFI and 0 for no RFI based on median filtering for TBv and threshold
12	1 for RFI and 0 for no RFI based on median filtering for TBh and threshold
13	1 for RFI, 0 for no RFI based on median filtering for TBv-TBh and threshold

## 1.2 File Naming Convention

---

Files are named according to the following convention and as described in Table 2.

**Example:**

SV08PLTB\_MMDDhhmmjv1.txt

SV08PLTB\_09291259jv1.txt

Table 2. File Name Variables and Descriptions

Variable	Description
SV08PLTB	Data Set ID
MM	2-Digit Month
DD	2-Digit Day
hh	2-digit hour of the start time
mm	2-digit minutes of the start time
jv1	(unknown)
.txt	Indicates this is a text file

## 1.3 File Size

---

Files range in size from approximately 1 to 2.2 MB.

## 1.4 Volume

---

The approximate volume for this data set is 67 MB.

## 1.5 Spatial Coverage

---

Southernmost Latitude: 38.93°N

Northernmost Latitude: 39.09°N

Westernmost Longitude: 76.25°W

Eastermost Longitude: 75.55°W

## 1.5.1 Spatial Resolution

The 3 dB spatial resolutions of the instruments at two potential altitudes are 350 m (1000 m altitude, minimum for the radar operation) and 1100 m (3000 m, maximum).

## 1.5.2 Projection and Grid Description

Latitude/longitude (WGS 84)

## 1.6 Temporal Coverage

---

29 September 2008 through 13 October 2008.

### 1.6.1 Temporal Resolution

Data were collected every 1 to 3 days.

## 1.7 Parameter or Variable

---

Parameters include brightness temperature [K], incidence angle [°], and surface temperature [°C].

### 1.7.1 Parameter Ranges

Valid parameter values fall within the following ranges:

Brightness temperature: 50 - 350 K

Incidence angle: 30° - 50°

Surface temperature: 0 - 40° C

## 2 SOFTWARE AND TOOLS

Any word-processing program or Web browser is sufficient for viewing the ASCII text files.

## 3 DATA ACQUISITION AND PROCESSING

### 3.1 Theory of Measurements

---

Current microwave models and retrieval algorithms have significant limitations in their treatment of different vegetation types and heterogeneous scenes (mixtures of grass, crops, trees, streams, lakes) and quantitative treatment of algorithm scaling and error analysis for such heterogeneous scenes. Measurements over wide varieties of terrain are needed, with joint active and passive

sensors, to develop algorithms and parameterizations that can work across all terrain types, and extract optimum information from the combined data. This will have direct impact on the design of dedicated soil moisture missions and development of methods to assimilate such data into land surface models.

Microwave radiometry and radar are well-established techniques for surface remote sensing. Combining passive and active sensors provides complementary information contained in the surface emissivity and backscatter signatures, which can improve the accuracy of retrieval of geophysical parameters. Over land, it has been demonstrated that the radiometer and the radar both provide information for estimating soil moisture and vegetation water content (Bolten et al. 2003, Njoku et al. 2002, Narayan et al. 2004).

### 3.2 Sensor or Instrument Description

The campaign, deployed by the Jet Propulsion Laboratory (JPL) with support from NASA, designed, built, and tested a precision Passive Active L-band System (PALS) microwave aircraft instrument for measurements of soil moisture and ocean salinity (Wilson et al. 2001). PALS provides radiometer products, vertically and horizontally polarized brightness temperatures, and radar products, normalized radar backscatter cross-section for V- transmit/V-receive, V-transmit/H-receive, H-transmit/H-receive, and H-transmit/V-receive. In addition, it can also provide the polarimetric third Stokes parameter measurement for the radiometer and the complex correlation between any two of the polarized radar echoes (VV, HH, HV and VH).

The following table provides the key characteristics of PALS:

Table 3. Description of the PALS instrument

<b>Passive</b>	Frequency	1.413 GHz
	Polarization	V, H, +45, -45
	Calibration stability	1 K (bias); 0.2 K (stability)
<b>Active</b>	Frequency	1.26 GHz
	Polarization	VV, HH, VH, HV
	Calibration accuracy	<2 dB (bias); 0.2 dB (stability)
<b>Antenna</b>	Half Power Beamwidth	20° (passive); 23°(active)
	Beam Efficiency	94%
	Directivity	18.5 dB
	Polarization isolation	> 35 dB

PALS was flown in three major soil moisture experiments (SGP99, SMEX02 and CLASIC) before

deployment in [SMAPVEX08](#) (PDF). Beginning with CLASIC, a new flat-panel antenna array was substituted for the large horns. The planar antenna consists of 16 stacked-patch microstrip elements arranged in four-by-four array configurations. Each stacked-patch element uses a honeycomb structure with extremely low dielectric loss at L-band to support the ground plane and radiating patches. The measured antenna pattern shows better than 35 dB polarization isolation, far exceeding the need for the polarimetric measurement capability. This compact, lightweight antenna has enabled PALS to transition to operating on small aircraft, such as the Twin Otter.

Since the CLASIC experiment in 2007, the PALS was augmented with additional components designed to detect and mitigate Radio Frequency Interference (RFI). The demonstration and evaluation of these elements was an important consideration in the SMAPVEX08 design.

PALS was mounted at a 40° incidence angle looking to the rear of the aircraft. The 3 dB spatial resolutions of the instruments at two potential altitudes are 350 m (1000 m altitude, minimum for the radar operation) and 1100 m (3000 m, maximum). It is important to note that PALS provides a single beam of data along a flight track and that any mapping must rely upon multiple flight lines at a spacing of the footprint width (see Figure 1).

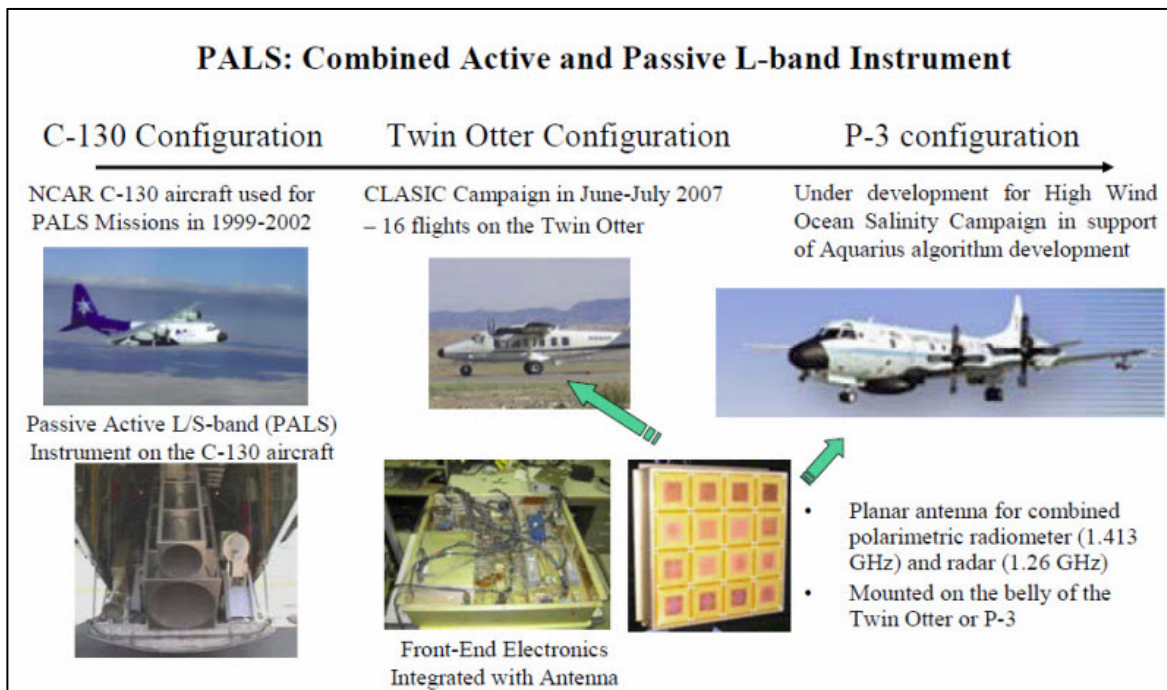


Figure 1. Images showing three different aircraft installations of the PALS Combined Active and Passive L-band Instrument.

### 3.3 Errors and Limitations

---

The quality of the normalized radar cross-section relies on internal calibration utilizing a calibration loop. The external calibration utilizes predetermined coefficients of the antenna and front-end. These references assure good quality of the data and there are no exceptional error sources for this data set.

### 3.4 Version History

---

Version 1 (June 2015)

## 4 REFERENCES AND RELATED PUBLICATIONS

Bolten, J., V. Lakshmi, and E. Njoku. 2003. Soil Moisture Retrieval Using the Passive/Active L- and S-band Radar/Radiometer. *IEEE Trans. Geosci. Rem. Sens.*, 41:2792-2801.

Narayan, U., V. Lakshmi, and E. Njoku. 2004. Retrieval of Soil Moisture from Passive and Active L/S Band Sensor (PALS) Observations during the Soil Moisture Experiment in 2002 (SMEX02). *Rem. Sens. Environ.*, 92:483-496.

Njoku, E., W. Wilson, S. Yueh, S. Dinardo, F. Li, T. Jackson, V. Lakshmi, and J. Bolten. 2002. Observations of Soil Moisture Using a Passive and Active Low Frequency Microwave Airborne Sensor during SGP99. *IEEE Trans. Geosci. Rem. Sens.*, 40:2659-2673.

Wilson, W. J., S. H. Yueh, S. J. Dinardo, S. Chazanoff, F. K. Li, and Y. Rahmat-Samii. 2001. Passive Active L- and S-band (PALS) Microwave Sensor for Ocean Salinity and Soil Moisture Measurements. *IEEE Trans. Geosci. Rem. Sens.* 39, 1039-1048.

## 5 CONTACTS AND ACKNOWLEDGMENTS

### **Simon Yueh**

Jet Propulsion Laboratory  
California Institute of Technology  
4800 Oak Grove Dr, Pasadena, CA 91109 USA

## 6 DOCUMENT INFORMATION

### 6.1 Publication Date

---

June 2015

## 6.2 Date Last Updated

---

February 2025