



# SMAPVEX12 PALS Soil Moisture Data, Version 1

---

## USER GUIDE

### How to Cite These Data

As a condition of using these data, you must include a citation:

Colliander, A. 2017. *SMAPVEX12 PALS Soil Moisture Data, Version 1*. [Indicate subset used].

Boulder, Colorado USA. NASA National Snow and Ice Data Center Distributed Active Archive Center.

<https://doi.org/10.5067/PGZVDAVFWVYQ>. [Date Accessed].

FOR QUESTIONS ABOUT THESE DATA, CONTACT [NSIDC@NSIDC.ORG](mailto:NSIDC@NSIDC.ORG)

FOR CURRENT INFORMATION, VISIT <https://nsidc.org/data/SV12PLSM/>



National Snow and Ice Data Center

# TABLE OF CONTENTS

1	DATA DESCRIPTION .....	2
1.1	Parameters .....	2
1.1.1	Parameter Range.....	2
1.2	File Information.....	3
1.2.1	Format.....	3
1.2.2	Directory Structure .....	3
1.2.3	Naming Convention .....	3
1.3	Spatial Information.....	4
1.3.1	Coverage .....	4
1.3.2	Resolution.....	4
1.3.3	Projection.....	4
1.4	Temporal Information .....	4
1.4.1	Coverage .....	4
2	DATA ACQUISITION AND PROCESSING.....	5
2.1	Background .....	5
2.2	Theory of Measurements.....	5
2.3	Quality, Errors, and Limitations .....	5
2.3.1	Error Sources.....	5
2.3.2	Quality Assessment .....	5
2.4	Instrumentation.....	5
2.4.1	Description.....	5
3	SOFTWARE AND TOOLS .....	7
4	CONTACTS AND ACKNOWLEDGMENTS .....	7
5	REFERENCES .....	7
6	DOCUMENT INFORMATION.....	8
6.1	Publication Date .....	8
6.2	Date Last Updated.....	8

# 1 DATA DESCRIPTION

## 1.1 Parameters

---

The retrieved parameter for this data set is soil moisture [ $\text{m}^3/\text{m}^3$ ]. Parameters used as input to the algorithm are also provided, including brightness temperature [K], estimated soil temperature [ $^{\circ}\text{C}$ ], estimated vegetation temperature [ $^{\circ}\text{C}$ ], vegetation water content [ $\text{kg}/\text{m}^2$ ], land cover class, sand fraction [%], and clay fraction [%].

### 1.1.1 Parameter Range

Valid parameter values are as follows:

Soil moisture: 0-1  $\text{m}^3/\text{m}^3$

Brightness temperature: 50-350 K

Temperature: 0-40 $^{\circ}\text{C}$

Vegetation water content: 0-40  $\text{kg}/\text{m}^2$

Sand and clay fractions: 0-100 %

Table 1 describes the land cover classes, which range from 1 to 11.

Table 1. Land Cover Classes

Class Number	Description
1	Unclassified
2	Water
3	Urban
4	Shrub
5	Wetlands
6	Pasture
7	Cereals
8	Corn
9	Canola
10	Soybean
11	Broadleaf

## 1.2 File Information

### 1.2.1 Format

Data are provided in ASCII comma-delimited text files. Table 2 provides descriptions for each column in the ASCII files.

An associated Extensible Markup Language (XML) metadata file is also provided for each data file.

Table 2. Description of Columns in Data Files

Column Number	Column Heading	Column Description
1	Date	Date in YYYYMMDD format [4-digit year, 2-digit month, two-digit day]
2	Row	Row number
3	Col	Column number
4	X (UTM)	Universal Transverse Mercator X (easting) coordinate of the boresight [m]
5	Y (UTM)	Universal Transverse Mercator Y (northing) coordinate of the boresight [m]
6	VSM	Volumetric soil moisture [m <sup>3</sup> /m <sup>3</sup> ]
7	TaH	Horizontally polarized brightness temperature [K]
8	TaV	Vertically polarized brightness temperature [K]
9	Tsoil	Estimate of the soil temperature [°C]
10	Tveg	Estimate of the vegetation temperature [°C]
11	VWC	Average vegetation water content in the pixel [kg/m <sup>2</sup> ]
12	LC	Dominant land cover class in the pixel [-]
13	S%	Average sand fraction in the pixel [%]
14	C%:	Average clay fraction in the pixel [%]
Note: The fill value NaN, for Not a Number, indicates when no data are available.		

### 1.2.2 Directory Structure

Data are available via HTTPS in the following directory:

[https://n5eil01u.ecs.nsidc.org/SMAP\\_VAL/SV12PLSM.001/](https://n5eil01u.ecs.nsidc.org/SMAP_VAL/SV12PLSM.001/)

### 1.2.3 Naming Convention

Files are named according to the following convention:

SV12PLSM\_PALS\_VSM\_2012MMDD\_HiAlt\_v01.txt

Where:

Table 3. File Naming Convention

Variable	Description
SV12PLSM	Product Short Name
PALS	Passive Active L- and S-band (PALS) Data
VSM	Volumetric Soil Moisture
2012	2012 (indicates year of SMAPVEX12 campaign)
MM	2-Digit Month
DD	2-Digit Day
HiAlt	High-Altitude Data
vXX	Data Version (v01: version 1.0)
.txt	Indicates ASCII text file format

Example: SV12PLSM\_PALS\_VSM\_20120629\_HiAlt\_v01.txt

## 1.3 Spatial Information

---

### 1.3.1 Coverage

Southernmost Latitude: 49.44°N

Northernmost Latitude: 49.96°N

Westernmost Longitude: 98.51°W

Easternmost Longitude: 97.85°W

### 1.3.2 Resolution

The high-altitude footprint size is approximately 1500 m, with a flight overpass sampling area of approximately 46 km x 47 km.

### 1.3.3 Projection

Data are provided in Universal Transverse Mercator (UTM) World Geodetic System 1984 (WGS84) coordinates, Zone 14 U.

## 1.4 Temporal Information

---

### 1.4.1 Coverage

Data were collected every one to four days from 12 June 2012 through 19 July 2012.

## 2 DATA ACQUISITION AND PROCESSING

### 2.1 Background

---

A description of SMAPVEX12 experiment domain and data acquisition regime is given in McNairn et al. (2015).

### 2.2 Theory of Measurements

---

Soil moisture was retrieved using PALS brightness temperature observations. The algorithm uses a variant of the traditional t-w-h algorithm (Njoku and Entekhabi, 1996). A detailed description of the algorithm and processing is given in Colliander et al. (2016).

### 2.3 Quality, Errors, and Limitations

---

#### 2.3.1 Error Sources

Refer to Colliander et al. (2016) for a detailed discussion on error sources impacting the soil moisture retrieval.

#### 2.3.2 Quality Assessment

Metrics for the soil moisture retrieval performance in non-forested areas based on in situ measurements was found to be as follows: RMSD (root mean square difference)  $0.058 \text{ m}^3/\text{m}^3$ , bias  $-0.015 \text{ m}^3/\text{m}^3$ , ubRMSD (unbiased RMSD)  $0.056 \text{ m}^3/\text{m}^3$ , and Pearson correlation 0.87. The performance is not defined for forested areas and usage of the retrievals over areas which are marked as broadleaf is not recommended for any scientific purposes. Refer to Colliander et al. (2016) for details.

### 2.4 Instrumentation

---

#### 2.4.1 Description

With NASA support, the Jet Propulsion Laboratory (JPL) designed, built, and tested the Passive Active L-band System (PALS) microwave aircraft instrument and deployed the instrument for measurements of soil moisture and ocean salinity (Wilson et al. 2001). PALS provides radiometer products, such as vertically and horizontally polarized brightness temperatures, and radar products, such as normalized radar backscatter cross-section for V-transmit/V-receive, V-transmit/H-receive,

H-transmit/H-receive, and H-transmit/V-receive. In addition, it can also provide the polarimetric third Stokes parameter measurement for the radiometer and the complex correlation between any two of the polarized radar echoes (VV, HH, HV and VH).

The following table provides the key characteristics of PALS:

Table 4. Description of the PALS instrument

<b>Passive</b>	Frequency	1.413 GHz
	Polarization	V, H, +45, -45
	Calibration stability	1 K (bias); 0.2 K (stability)
<b>Active</b>	Frequency	1.26 GHz
	Polarization	VV, HH, VH, HV
	Calibration accuracy	<2 dB (bias); 0.2 dB (stability)
<b>Antenna</b>	Half Power Beamwidth	20° (passive); 23°(active)
	Beam Efficiency	94%
	Directivity	18.5 dB
	Polarization isolation	> 35 dB

The PALS instrument was flown in four major soil moisture experiments (SGP99, SMEX02, CLASIC07 and SMAPVEX08 [Colliander et al. 2012]) before deployment in SMAPVEX12. Beginning with CLASIC07, a new flat-panel antenna array was substituted for the large horns. The planar antenna consists of 16 stacked-patch microstrip elements arranged in a four by- four array configurations. Each stacked-patch element uses a honeycomb structure with extremely low dielectric loss at L-band to support the ground plane and radiating patches. The measured antenna pattern shows better than 33 dB polarization isolation, far exceeding the need for the polarimetric measurement capability. This compact, lightweight antenna has enabled PALS to transition to operating on small aircraft, such as the Twin Otter (Yueh et al. 2008).

PALS was mounted at a 40° incidence angle looking to the rear of the aircraft. The 3 dB spatial resolutions of the instruments at two potential altitudes are 500 m (due to 1000 m altitude, minimum for the radar operation) and 1500 m (due to 3000 m altitude, maximum). It is important to note that PALS provides a single beam of data along a flight track and that any mapping must rely upon multiple flight lines at a spacing of the footprint width.

The calibration of the PALS brightness temperature during SMAPVEX12 is described in Colliander et al. (2015).

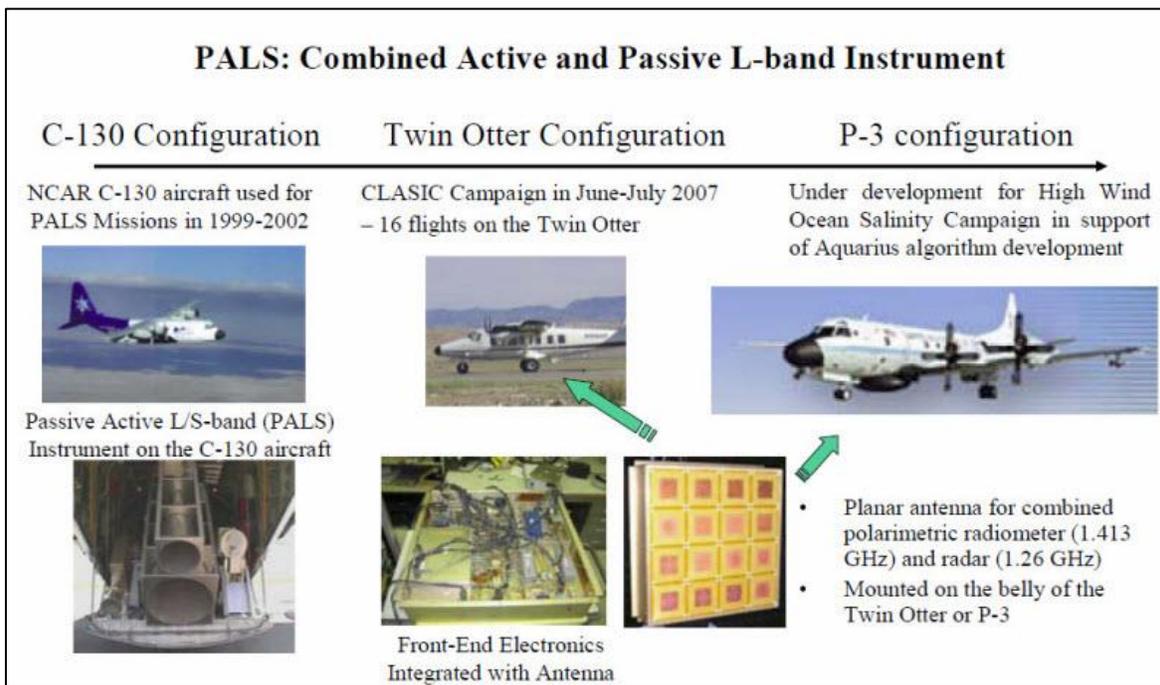


Figure 1. Images of Three Different Aircraft Installations of the PALS Combined Active and Passive L-band Instrument

### 3 SOFTWARE AND TOOLS

No special tools are required to view these data. Any word-processing program or Web browser will display the data.

### 4 CONTACTS AND ACKNOWLEDGMENTS

**Andreas Colliander**

Jet Propulsion Laboratory  
 California Institute of Technology  
 4800 Oak Grove Dr, Pasadena, CA 91109 USA

### 5 REFERENCES

Bolten, J., V. Lakshmi, and E. Njoku. 2003. Soil Moisture Retrieval Using the Passive/Active L- and S-band Radar/Radiometer. *IEEE Trans. Geosci. Rem. Sens.* 41:2792-2801.

Colliander, A., E. G. Njoku, T. J. Jackson, S. Chazanoff, H. McNairn, J. Powers, and M. H. Cosh. 2016. Retrieving Soil Moisture for Non-Forested Areas using PALS Radiometer Measurements in SMAPVEX12 Field Campaign. *Rem. Sens. of Environ.* 184:86-100.

Colliander, A., T.J. Jackson, H. McNairn, S. Chazanoff, S. Dinardo, B. Latham, I. O'Dwyer, W. Chun, S. Yueh, E. Njoku. (2015). Comparison of Airborne Passive and Active L-Band System

(PALS) Brightness Temperature Measurements to SMOS Observations During the SMAP Validation Experiment 2012 (SMAPVEX12). *IEEE Trans. Geosci. Rem. Sens.* 12:4.

Colliander, A., S. Chan, S. Kim, N. Das, S. Yueh, M. Cosh, R. Bindlish, T. Jackson, and E. Njoku. 2012. Long Term Analysis of PALS Soil Moisture Campaign Measurements for Global Soil Moisture Algorithm Development. *Rem. Sens. of Environ.* 121:309-322.

McNairn, H., T. Jackson, G. Wiseman, S. Belair, A. Berg, P. Bullock, A. Colliander, M. Cosh, S. Kim, R. Magagi, et al. 2015. The Soil Moisture Active Passive Validation Experiment 2012 (SMAPVEX12): Pre-Launch Calibration and Validation of the SMAP Satellite. *IEEE Trans. Geosci. Rem. Sens.*, 53:5.

Narayan, U., V. Lakshmi, and E. Njoku. 2004. Retrieval of Soil Moisture from Passive and Active L/S Band Sensor (PALS) Observations during the Soil Moisture Experiment in 2002 (SMEX02). *Rem. Sens. Environ.* 92:483-496.

Njoku E., W. Wilson, S. Yueh, S. Dinardo, F. Li, T. Jackson, V. Lakshmi, and J. Bolten. 2002. Observations of Soil Moisture Using a Passive and Active Low Frequency Microwave Airborne Sensor during SGP99. *IEEE Trans. Geosci. Rem. Sens.* 40:2659-2673.

Njoku, E. G., and D. Entekhabi. 1996. Passive Microwave Remote Sensing of Soil Moisture. *J. Hydrology*, 184:101-129.

Wilson, W. J., S. H. Yueh, S. J. Dinardo, S. Chazanoff, F. K. Li, and Y. Rahmat-Samii. 2001. Passive Active L- and S-band (PALS) Microwave Sensor for Ocean Salinity and Soil Moisture Measurements. *IEEE Trans. Geosci. Rem. Sens.* 39, 1039-1048.

Yueh, S., S. Dinardo, S. Chan, E. Njoku, T. Jackson, and R. Bindlish. 2008. Passive and Active L-Band System and Observations during the 2007 CLASIC Campaign. *Proc. IEEE IGARSS08.* (2) II-241 - II-244, July 7-11, 2008.

## 6 DOCUMENT INFORMATION

### 6.1 Publication Date

---

June 2017

### 6.2 Date Last Updated

---

28 October 2020