SMAPVEX12 PALS Brightness Temperature Data, Version 1

USER GUIDE

How to Cite These Data

As a condition of using these data, you must include a citation:

Colliander, A. 2014. *SMAPVEX12 PALS Brightness Temperature Data, Version 1*. [Indicate subset used]. Boulder, Colorado USA. NASA National Snow and Ice Data Center Distributed Active Archive Center. https://doi.org/10.5067/WA6QS88P2AP5. [Date Accessed].

FOR QUESTIONS ABOUT THESE DATA, CONTACT NSIDC@NSIDC.ORG

FOR CURRENT INFORMATION, VISIT https://nsidc.org/data/SV12PLTB/

National Snow and Ice Data Center

TABLE OF CONTENTS

1 DATA DESCRIPTION

This data set contains brightness temperatures obtained by the Passive Active L-band System (PALS) microwave aircraft instrument. The data were collected as part of the Soil Moisture Active Passive Validation Experiment 2012 (SMAPVEX12).

1.1 Parameters

The parameters for this data set are brightness temperature [K] and surface temperature [°C]. Valid parameter values range between 50 and 350 K and 0 and 40° C, respectively.

1.2 File Information

1.2.1 Format

Data are provided in 34 ASCII text files (two files for each day in which data were collected). Table 1 provides descriptions for each column in the data files.

Table 1. Contents of Data Fields

Column Number	Description
1	UTC time in seconds
2	Latitude of the boresight (footprint center) [°]
3	Longitude of the boresight [°]
4	UTM x-coordinate of the boresight [m]
5	UTM y-coordinate of the boresight [m]
6	Vertically polarized brightness temperature [K]
7	Horizontally polarized brightness temperature [K]
8	Infrared surface temperature [°C]

1.2.2 File Naming Convention

Files are named according to the following convention, and as described in Table 2:

`SV12PLTB_PALS_TA_2012MMDD_[Hi/Lo]Alt_vXXX.txt`

Where:

Table 2. File Naming Convention

Variable	Description
SV12PLTB	Data Set Short Name
PALS	Passive Active L- and S-band (PALS) data
TA	Antenna Temperature
2012	2012 (representing SMAPVEX12 campaign)
MM	2-Digit Month
DD	2-Digit Day
[Hi/Lo]Alt	Indicates whether this is a high- or low-altitude file
vXXX	Data version (v150 = version 1.50)
.txt	Indicates this is an ASCII text file

Example: `SV12PLTB_PALS_TA_20120607_HiAlt_v150.txt`

1.3 Spatial Information

1.3.1 Coverage

Southernmost Latitude: 49.44°N

Northernmost Latitude: 49.96°N

Westernmost Longitude: 98.51°W

Easternmost Longitude: 97.85°W

1.3.2 Resolution

The low-altitude footprint size is approximately 500 m, and the high-altitude footprint size is approximately 1500 m.

1.3.3 Projection

Data are provided in Universal Transverse Mercator (UTM), Zone 14 N, World Geodetic System 1984 (WGS84) coordinates.

1.4 Temporal Information

1.4.1 Coverage

Data were collected every one to five days from 07 June 2012 through 19 July 2012.

2 DATA ACQUISITION AND PROCESSING

2.1 Background

Current microwave models and retrieval algorithms have significant limitations in their treatment of different vegetation types and heterogeneous scenes (mixtures of grass, crops, trees, streams, lakes) and quantitative treatment of algorithm scaling and error analysis for such heterogeneous scenes. Measurements over wide varieties of terrain are needed, with joint active and passive sensors, to develop algorithms and parameterizations that can work across all terrain types, and extract optimum information from the combined data. This will have direct impact on the design of dedicated soil moisture missions and development of methods to assimilate such data into land surface models.

Microwave radiometry and radar are well-established techniques for surface remote sensing. Combining passive and active sensors provides complementary information contained in the surface emissivity and backscatter signatures, which can improve the accuracy of retrieval of geophysical parameters. Over land, it has been demonstrated that the radiometer and the radar both provide information for estimating soil moisture and vegetation water content (Bolten et al. 2003, Njoku et al. 2002, Narayan et al. 2004).

2.2 Quality, Errors, and Limitations

The quality of the brightness temperature data relies on internal calibration utilizing matched loads and external calibration exploiting lake surface close to the experiment area. These references assure generally good quality of the data.

2.3 Instrumentation

2.3.1 Description

The campaign deployed by the Jet Propulsion Laboratory (JPL), with NASA support, designed, built and tested precision Passive Active L-band System (PALS) microwave aircraft instrument for measurements of soil moisture and ocean salinity (Wilson et al. 2001). PALS provides radiometer products, vertically and horizontally polarized brightness temperatures, and radar products, normalized radar backscatter cross-section for V- transmit/V-receive, V-transmit/H-receive, H-transmit/H-receive, and H-transmit/V-receive. In addition, it can also provide the polarimetric third Stokes parameter measurement for the radiometer and the complex correlation between any two of the polarized radar echoes (VV, HH, HV and VH). The following table provides the key characteristics of PALS:

Table 3. Description of the PALS instrument

Passive	Frequency	1.413 GHz
	Polarization	V, H, +45, -45
	Calibration stability	1 K (bias); 0.2 K (stability)
Active	Frequency	1.26 GHz
	Polarization	VV, HH, VH, HV
	Calibration accuracy	<2 dB (bias); 0.2 dB (stability)
Antenna	Half Power Beamwidth	20° (passive); 23°(active)
	Beam Efficiency	94%
	Directivity	18.5 dB
	Polarization isolation	> 35 dB

The PALS instrument was flown in four major soil moisture experiments (SGP99, SMEX02, CLASIC and SMAPVEX08 [Colliander et al. 2012]) before deployment in SMAPVEX12. Beginning with CLASIC, a new flat-panel antenna array was substituted for the large horns. The planar antenna consists of 16 stacked-patch microstrip elements arranged in a four by- four array configurations. Each stacked-patch element uses a honeycomb structure with extremely low dielectric loss at L-band to support the ground plane and radiating patches. The measured antenna pattern shows better than 33 dB polarization isolation, far exceeding the need for the polarimetric measurement capability. This compact, lightweight antenna has enabled PALS to transition to operating on small aircraft, such as the Twin Otter (Yueh et al. 2008).

PALS was mounted at a 40° incidence angle looking to the rear of the aircraft. The 3dB spatial resolutions of the instruments at two potential altitudes are 500 m (1000 m altitude, minimum for the radar operation) and 1500 m (3000 m, maximum). It is important to note that PALS provides a single beam of data along a flight track and that any mapping must rely upon multiple flight lines at a spacing of the footprint width.

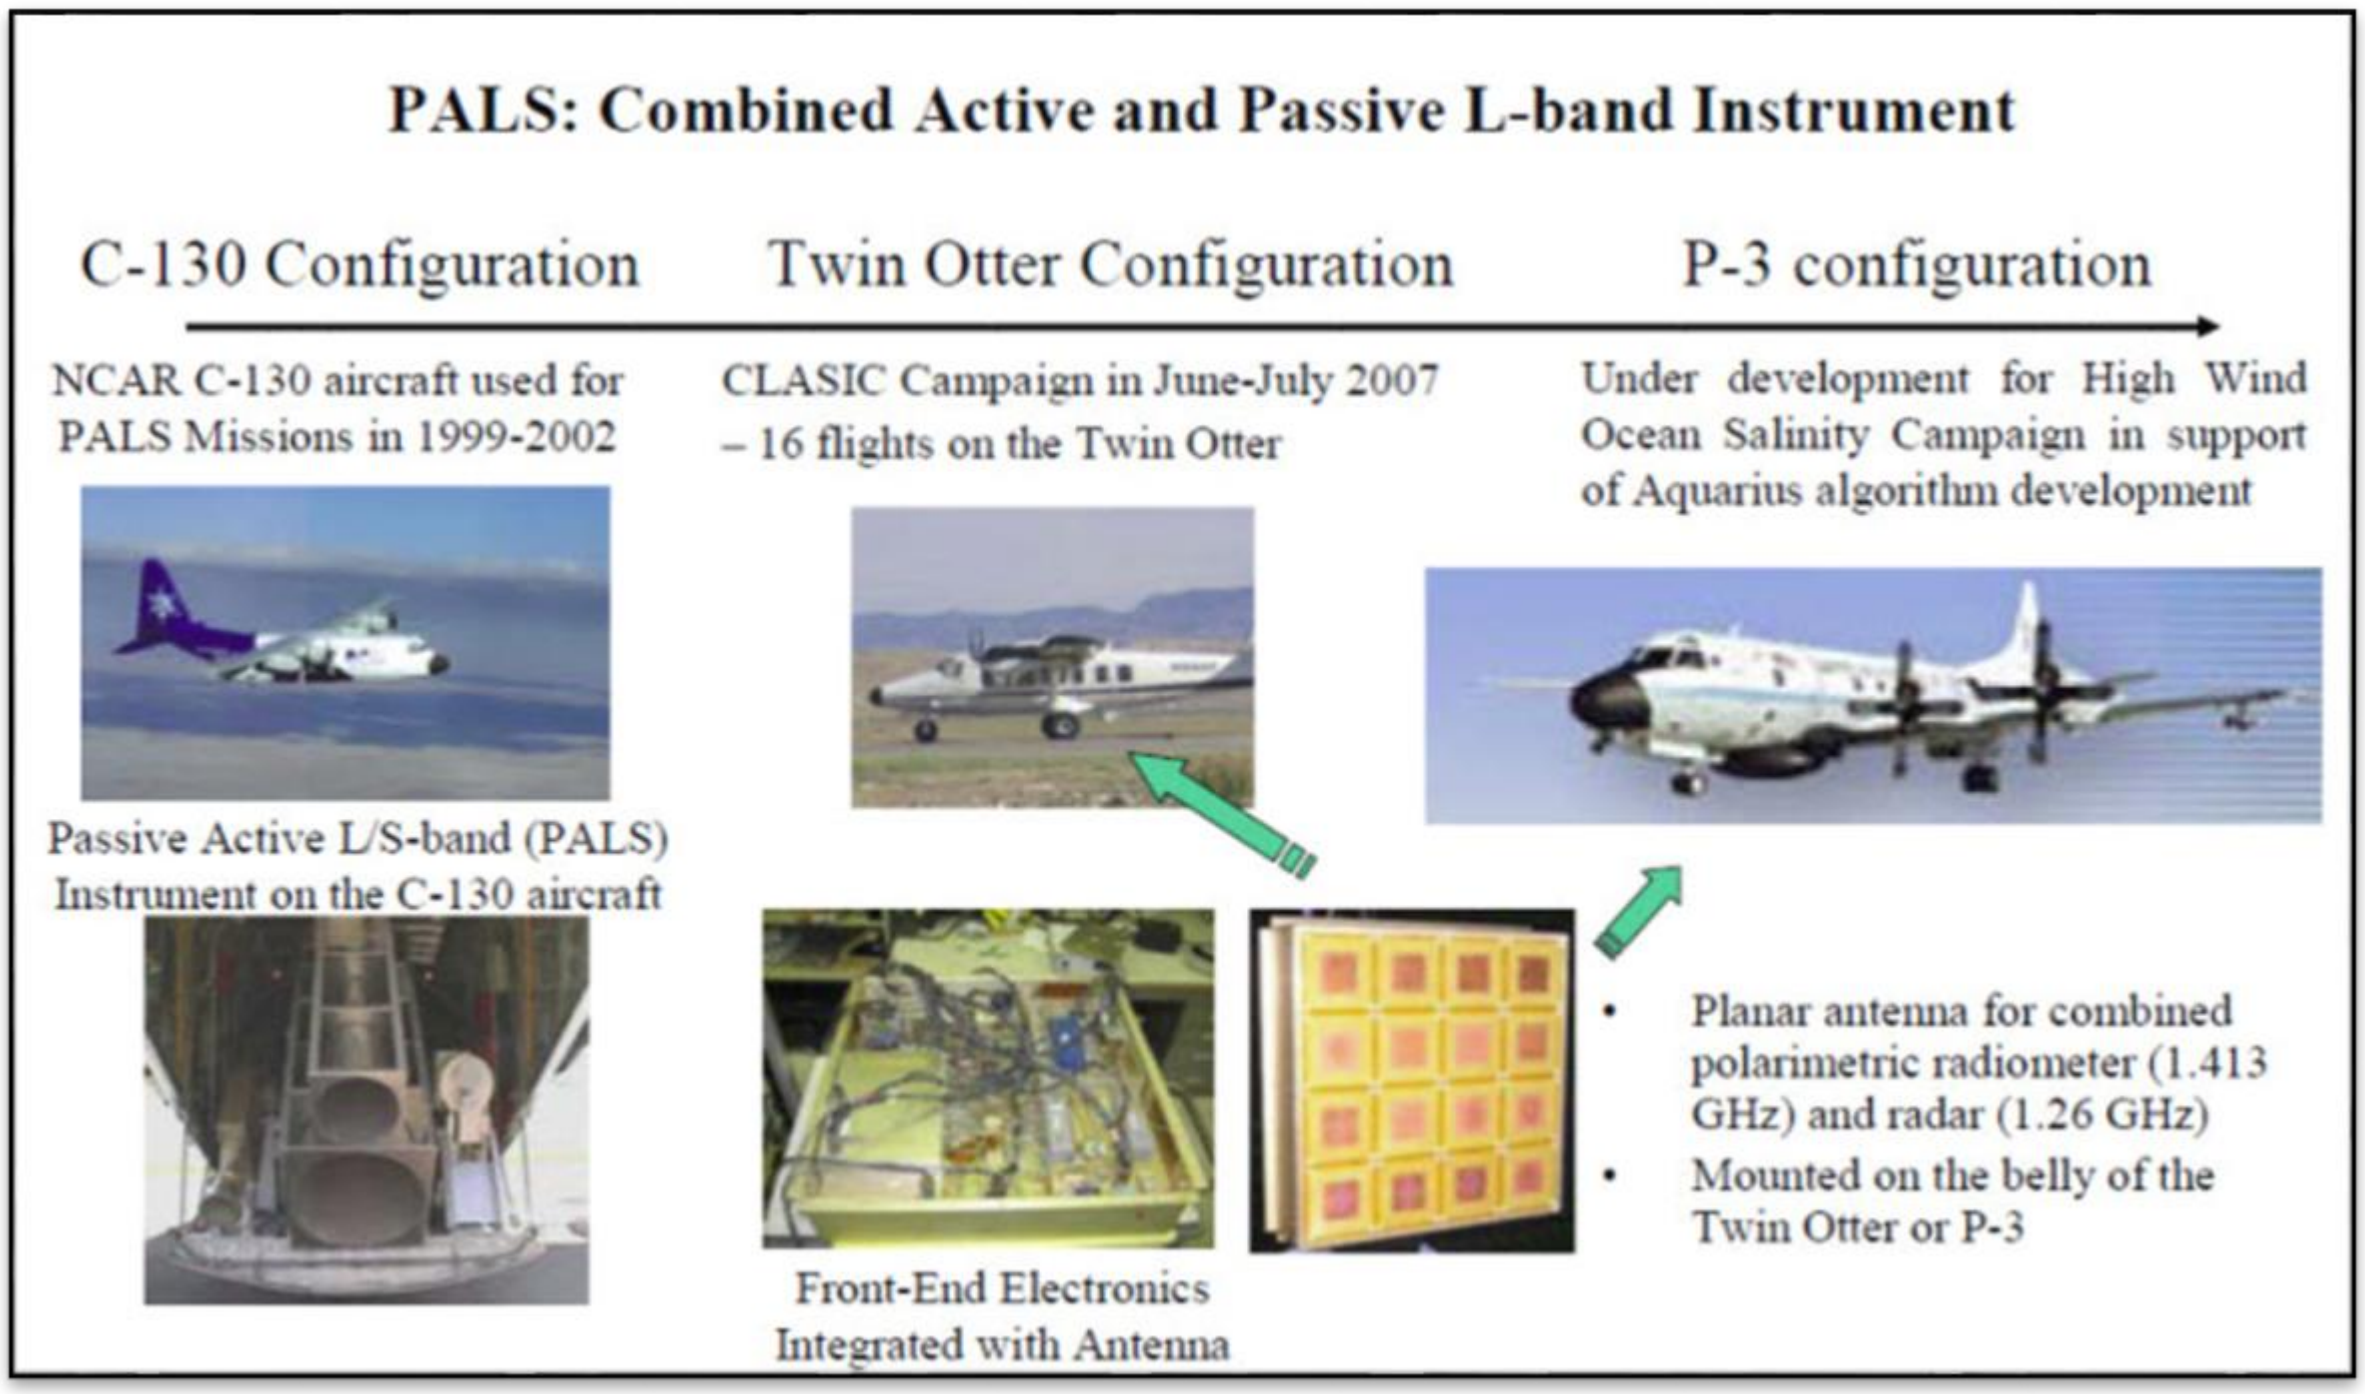

Figure 1. Images of Three Different Aircraft Installations of the PALS Combined Active and Passive L-band Instrument

3 SOFTWARE AND TOOLS

No special tools are required to view these data. Any word-processing program or Web browser will display the data.

4 CONTACTS AND ACKNOWLEDGMENTS

Andreas Colliander
Jet Propulsion Laboratory
California Institute of Technology
4800 Oak Grove Dr, Pasadena, CA 91109 USA

5 REFERENCES

Bolten, J., V. Lakshmi, and E. Njoku. 2003. Soil Moisture Retrieval Using the Passive/Active L- and S-band Radar/Radiometer. *IEEE Trans. Geosci. Rem. Sens*., 41:2792-2801.

Colliander, A., S. Chan, S. Kim, N. Das, S. Yueh, M. Cosh, R. Bindlish, T. Jackson, and E. Njoku. 2012. Long Term Analysis of PALS Soil Moisture *Campaign Measurements for Global Soil Moisture Algorithm Development. Rem*. Sens. of Environ.. 121:309-322.

Narayan, U., V. Lakshmi, and E. Njoku. 2004. Retrieval of Soil Moisture from Passive and Active L/S Band Sensor (PALS) Observations during the Soil Moisture Experiment in 2002 (SMEX02). *Rem. Sens. Environ*.. 92:483-496.

Njoku, E., W. Wilson, S. Yueh, S. Dinardo, F. Li, T. Jackson, V. Lakshmi, and J. Bolten. 2002. Observations of Soil Moisture Using a Passive and Active Low Frequency Microwave Airborne Sensor during SGP99. *IEEE Trans*. *Geosci. Rem. Sens*. 40:2659-2673.

Wilson, W. J., S. H. Yueh, S. J. Dinardo, S. Chazanoff, F. K. Li, and Y. Rahmat-Samii. 2001. Passive Active L- and S-band (PALS) Microwave Sensor for Ocean Salinity and Soil Moisture Measurements. *IEEE Trans*. *Geosci. Rem. Sens*. 39, 1039-1048.

Yueh, S., S. Dinardo, S. Chan, E. Njoku, T. Jackson, and R. Bindlish. 2008. Passive and Active L-Band System and Observations during the 2007 CLASIC Campaign. *Proc*. *IEEE IGARSS08*. (2) II-241 - II-244, July 7-11, 2008.

6 DOCUMENT INFORMATION

6.1 Publication Date

October 2013

6.2 Date Last Updated

28 October 2020